
STRC0495-2P: Double flow Side Channel Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

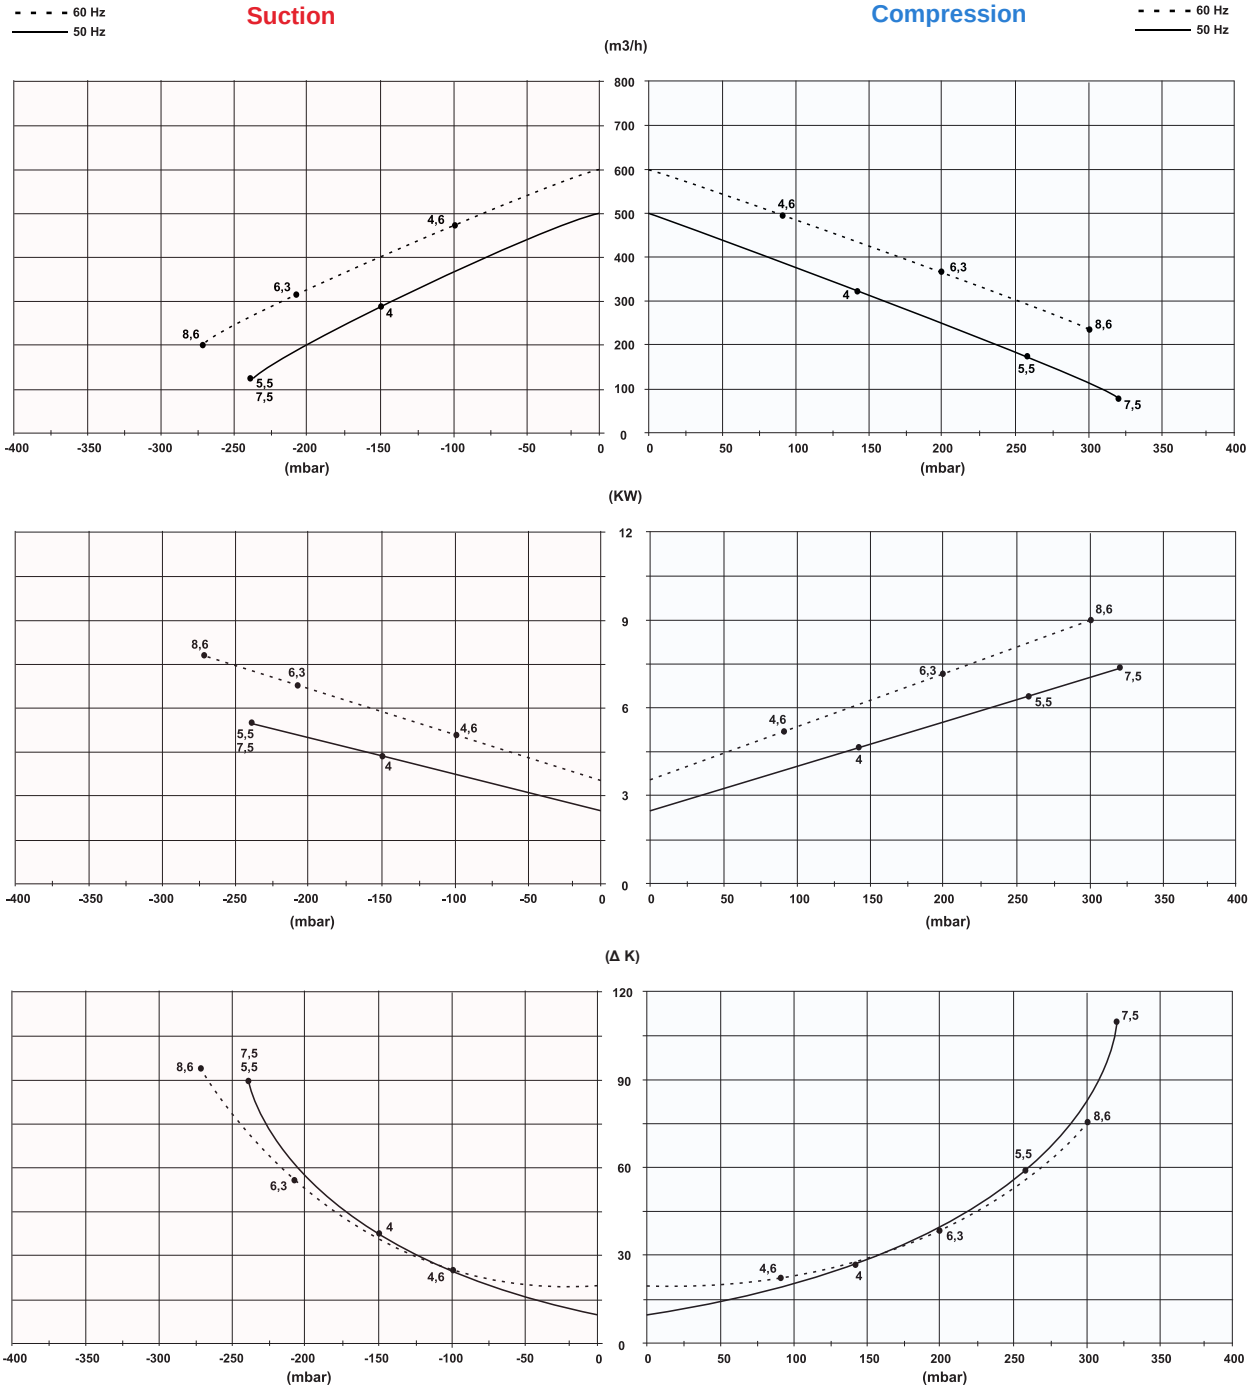

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRC0495-2P: Double flow Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0495-2PT401-7	4	50	345-415 Δ / 600-720 Y	9,0 Δ / 5,2 Y	495	-150 / 140	74	54
	4,6	60	380-480 Δ / 660-720 Y	9,0 Δ / 5,2 Y	595	-100 / 90	78	
STRC0495-2PT551-7	5,5	50	345-415 Δ / 600-720 Y	13,3 Δ / 7,7 Y	494	-240 / 260	74	69
	6,3	60	380-480 Δ / 660-720 Y	13,3 Δ / 7,7 Y	595	-210 / 200	78	
STRC0495-2PT751-7	7,5	50	345-415 Δ / 600-720 Y	16,7 Δ / 9,6 Y	494	-240 / 320	74	75
	8,6	60	380-480 Δ / 660-720 Y	17,3 Δ / 10,0 Y	595	-270 / 300	78	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T...-5	50	500 Δ
	60	575 Δ
STRC ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A...-1	50	230
	60	230
STRC ….-..S...-5	50	115/230
	60	115/230

Dimensions

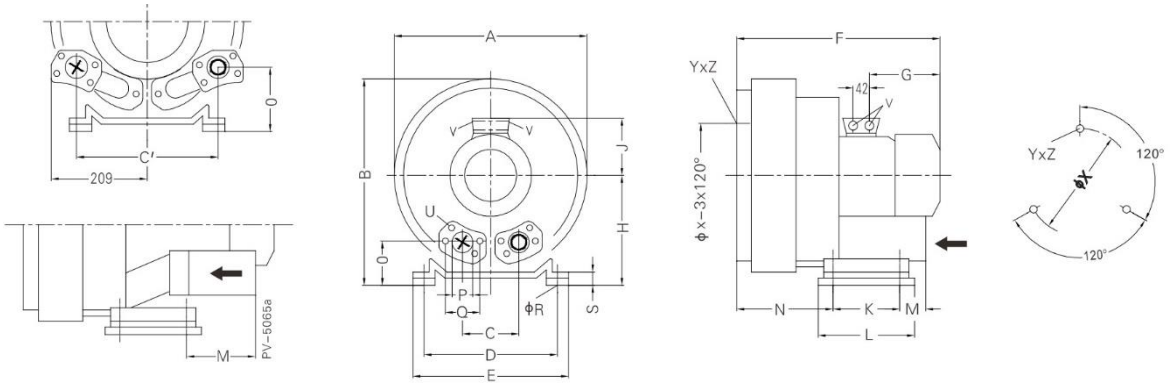

Type	A	B	C	C'	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	ϕX	YxZ	X-Holes
STRC0495-2PT401-7	420	468	125	-	290	325	526	209	257	148	140	180	84	205	114	G 2"	83	15	64,5	M8 x 17	4 x M32 x 1,5	240	M10 x 06	0/120º/240º
STRC0495-2PT551-7	420	468	-	308	290	325	571	226	257	148	140	180	225	205	114	G 2"	83	15	64,5	M8 x 17	4 x M32 x 1,5	240	M10 x 06	0/120º/240º
STRC0495-2PT751-7	420	468	-	308	290	325	571	226	257	148	140	180	225	205	114	G 2"	83	15	64,5	M8 x 17	4 x M32 x 1,5	240	M10 x 06	0/120º/240º

Tel: +1 438-880-4655