
STRC0530-2S: Double stage Side Channel Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

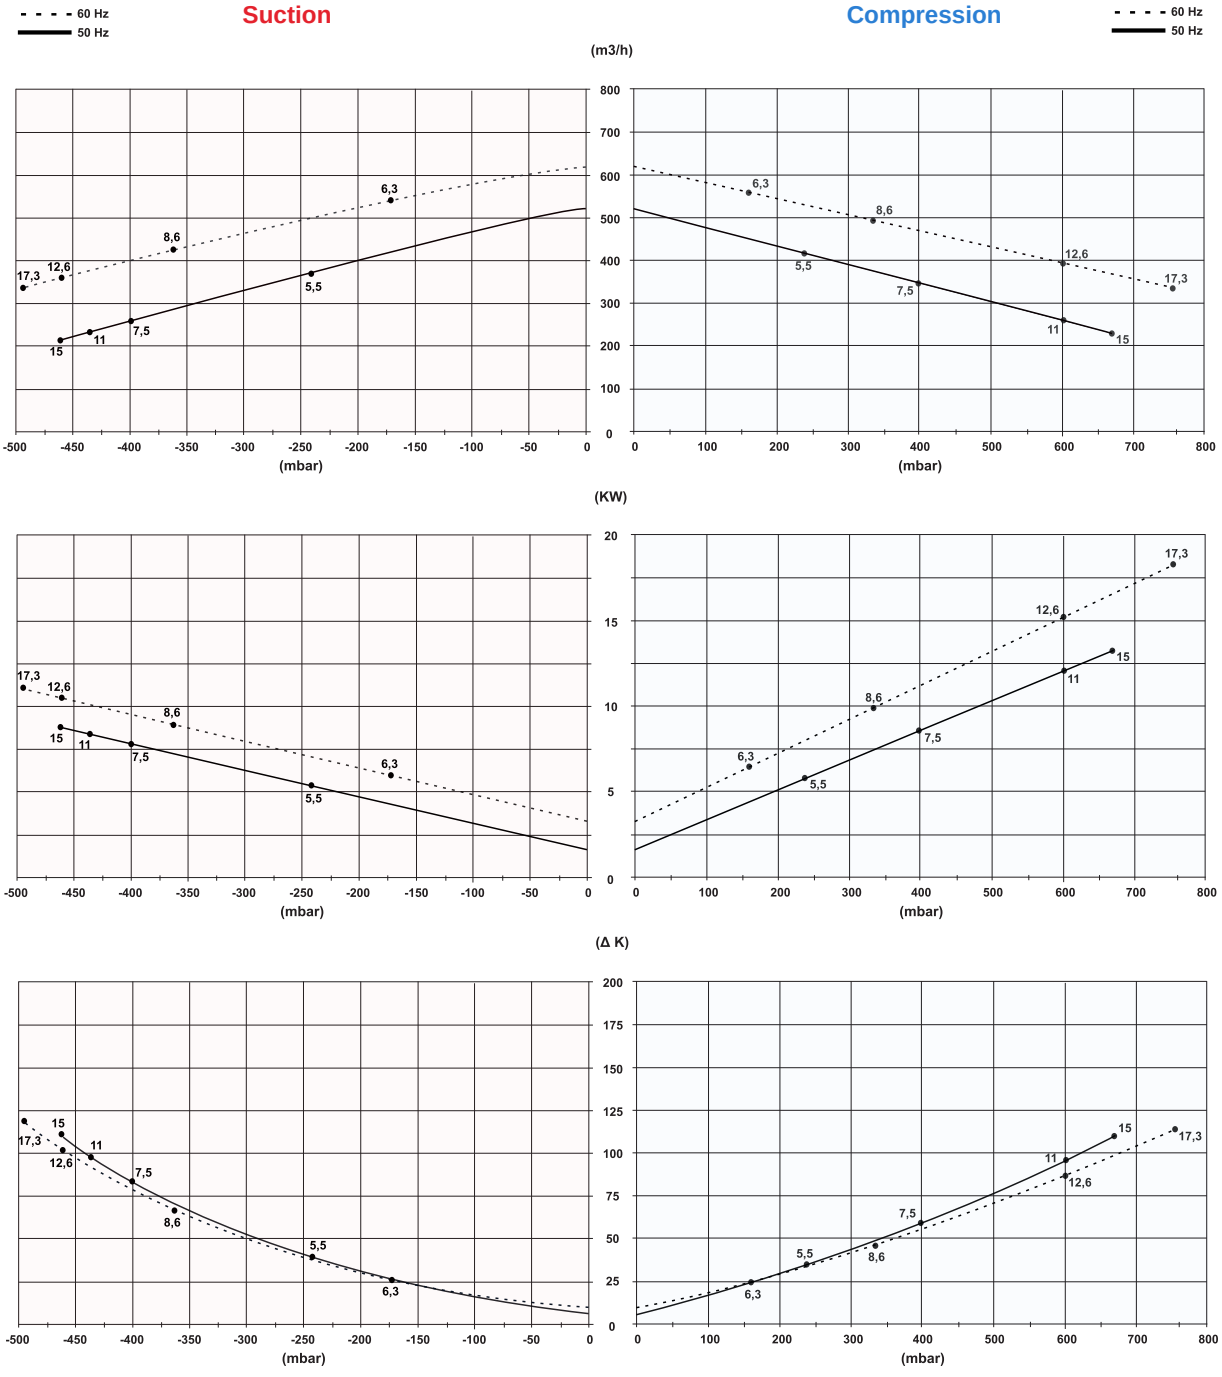

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

STRC0530-2S: Double stage Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0530-2ST551-7	5,5	50	345-415 Δ / 600-720 Y	13,3 Δ / 7,7 Y	530	-240 / 240	74	83
	6,3	60	380-480 Δ / 660-720 Y	13,3 Δ / 7,7 Y	620	-170 / 160	78	
STRC0530-2ST751-7	7,5	50	345-415 Δ / 600-720 Y	16,7 Δ / 9,6 Y	530	-400 / 400	74	86
	8,6	60	380-480 Δ / 660-720 Y	17,3 Δ / 10,0 Y	620	-360 / 320	78	
STRC0530-2ST112-7	11	50	345-415 Δ / 600-720 Y	28,0 Δ / 16,2 Y	530	-430 / 600	74	104
	12,6	60	380-480 Δ / 660-720 Y	29,0 Δ / 16,7 Y	620	-460 / 600	78	
STRC0530-2ST152-7	15	50	345-415 Δ / 600-720 Y	32,5 Δ / 18,8 Y	530	-460 / 670	74	120
	17,3	60	380-480 Δ / 660-720 Y	34,5 Δ / 19,9 Y	620	-490 / 750	78	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C

Inlet temperature: -25°… 40°C


Max. installation height: 1000 m

Bimetal motor protection


Type	Hz	V
STRC ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T...-5	50	500 Δ
	60	575 Δ
STRC ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A...-1	50	230
	60	230
STRC ….-..S...-5	50	115/230
	60	115/230

Dimensions

HSC0530-2ST551-7 & HSC0530-2ST751-7

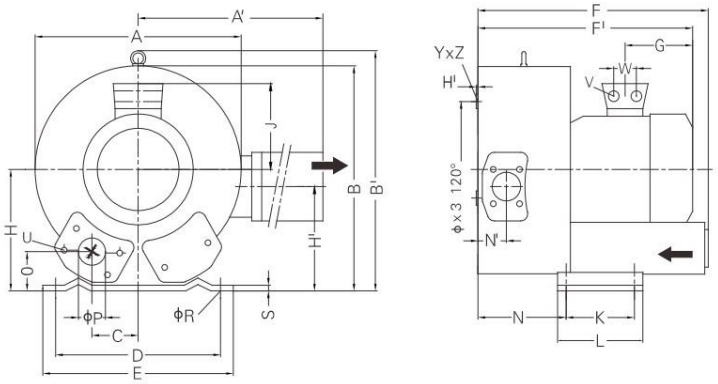

HSC0530-2ST112-7 & HSC0530-2ST152-7

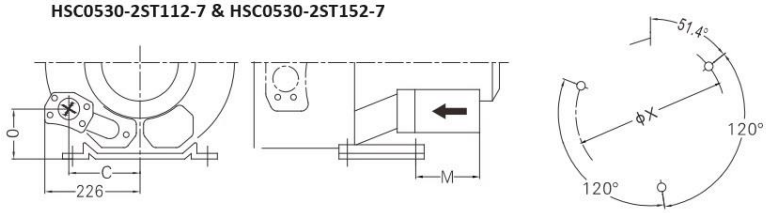

Type	A	A'	B	B'	C	D	E	F	F'	G	H	H'	J	K	L	M	N	N'	O	P	ϕR	S	V	W	ϕX	Y_Z	X-Holes
STRC0530-2ST551-7	500	549	490	509	-	356	545	545	589	247	240	199	148	170	217	140	236	84	65	G 2 1/2"	15	6	4 x M32 x 1,5	42	286	M12 x 20	58,5º/171,5º/291,5º
STRC0530-2ST751-7	500	549	490	509	-	356	545	545	589	247	240	199	167	170	217	140	236	84	65	G 2 1/2"	15	6	4 x M32 x 1,5	42	286	M12 x 20	58,5º/171,5º/291,5º
STRC0530-2ST112-7	500	549	490	509	-	356	545	717	694	318	240	199	197	170	217	312	212	84	105	G 2 1/2"	15	6	4 x M32 x 1,5	54	286	M12 x 20	58,5º/171,5º/291,5º
STRC0530-2ST152-7	500	549	490	509	152	356	545	717	694	318	240	199	197	170	217	312	212	84	105	G 2 1/2"	15	6	4 x M32 x 1,5	54	286	M12 x 20	58,5º/171,5º/291,5º

Tel: +1 438-880-4655