
STRC0700-1M: Single stage Side Channel Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

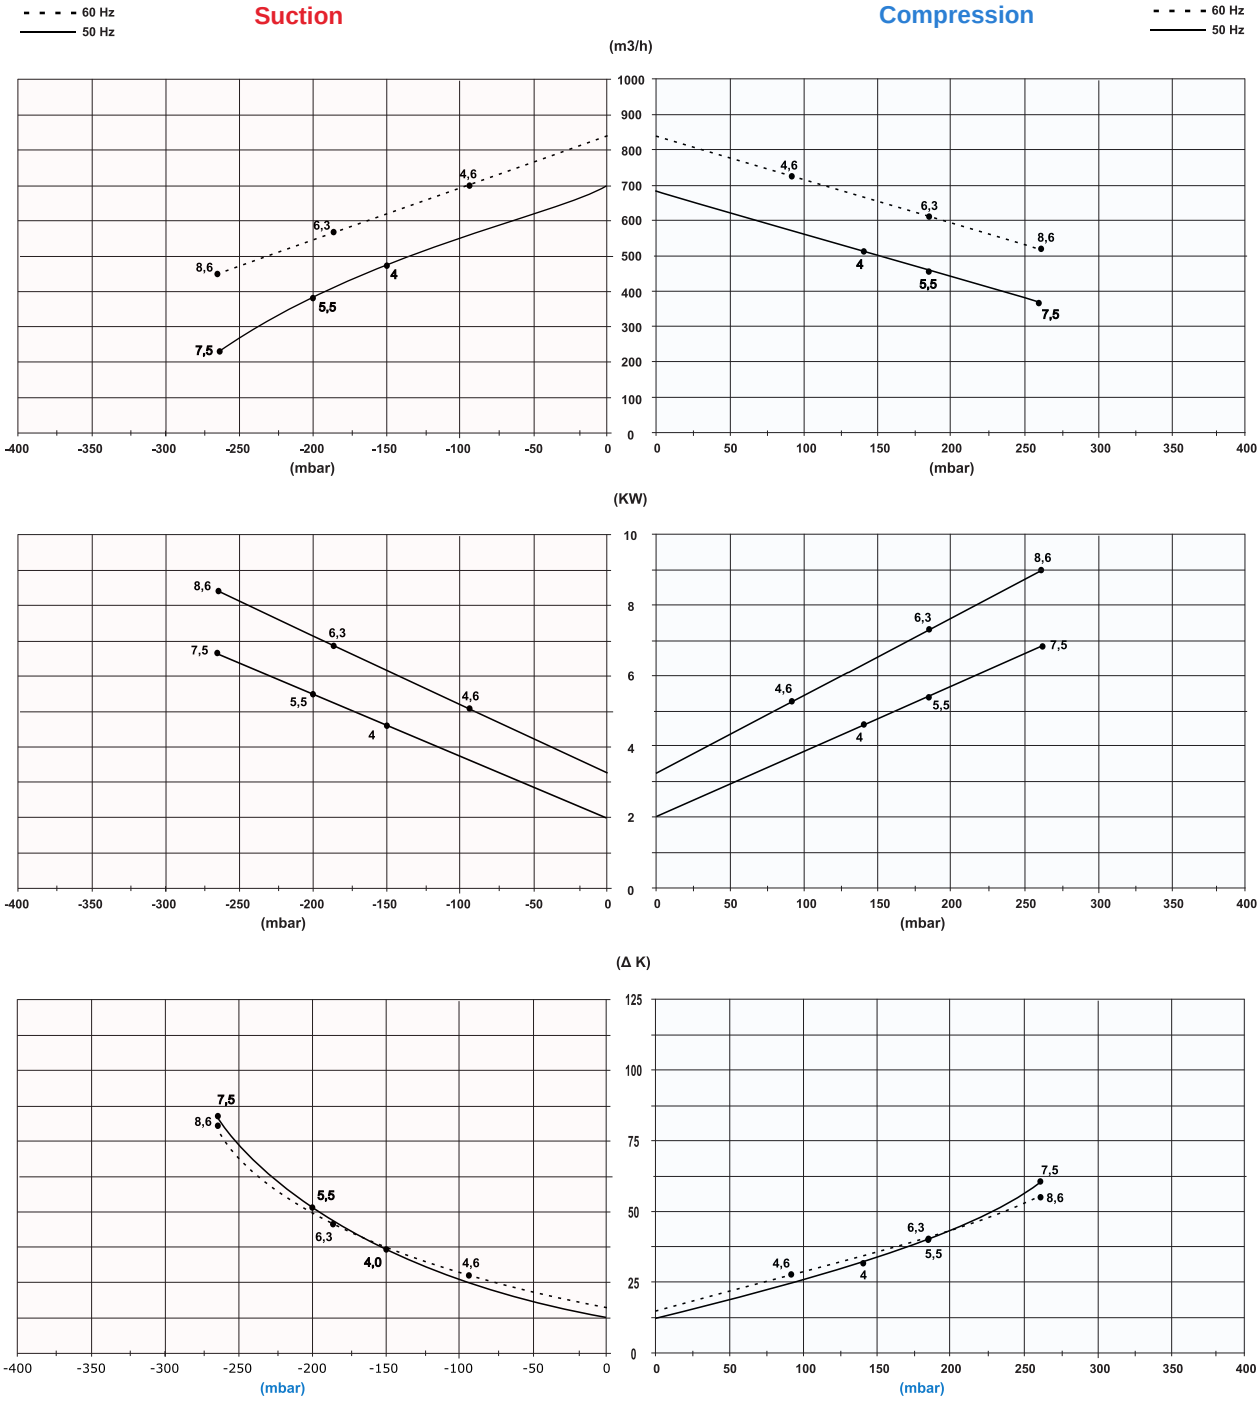

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

STRC0700-1M: Single stage Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0700-1MT401-7	4	50	345-415 Δ / 600-720 Y	9,5 Δ / 5,5 Y	700	-150 / 140	70	57
	4,6	60	380-480 Δ / 660-720 Y	9,5 Δ / 5,5 Y	840	-90 / 90	74	
STRC0700-1MT551-7	5,5	50	345-415 Δ / 600-720 Y	13,3 Δ / 7,7 Y	700	-200 / 180	70	66
	6,3	60	380-480 Δ / 660-720 Y	13,3 Δ / 7,7 Y	840	-180 / 180	74	
STRC0700-1MT751-7	7,5	50	345-415 Δ / 600-720 Y	16,7 Δ / 9,6 Y	700	-270 / 260	70	69
	8,6	60	380-480 Δ / 660-720 Y	17,3 Δ / 10,0 Y	840	-270 / 260	74	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T…-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T…-5	50	500 Δ
	60	575 Δ
STRC ….-..T…-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T…-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A…-1	50	230
	60	230
STRC ….-..S…-5	50	115/230
	60	115/230

Dimensions

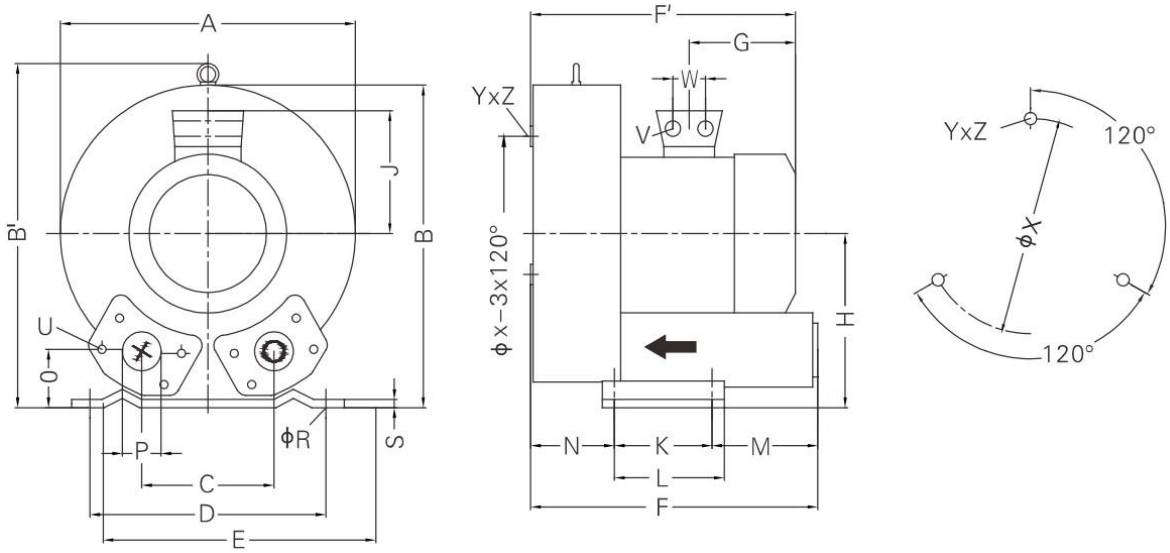

Type	A	B	B'	C	D	E	F	F'	G	H	J	K	L	M
STRC0700-1MT401-7	451	461	509	152	356	449	449	466	230	240	148	170	217	140
STRC0700-1MT551-7	451	461	509	152	356	449	449	492	247	240	148	170	217	140
STRC0700-1MT751-7	451	461	509	152	356	449	449	492	247	240	148	170	217	140

Type	N	O	P	ϕR	S	V	W	ϕX	Y_Z	X-Holes
STRC0700-1MT401-7	124	65	G 2 1/2"	15	6	4 x M32 x 1,5	42	286	M12 x 20	0/120°/240°
STRC0700-1MT551-7	124	65	G 2 1/2"	15	6	4 x M32 x 1,5	42	286	M12 x 20	0/120°/240°
STRC0700-1MT751-7	124	65	G 2 1/2"	15	6	4 x M32 x 1,5	42	286	M12 x 20	0/120°/240°

Tel: +1 438-880-4655