
STRC0880-2P: Double flow Side Channel Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

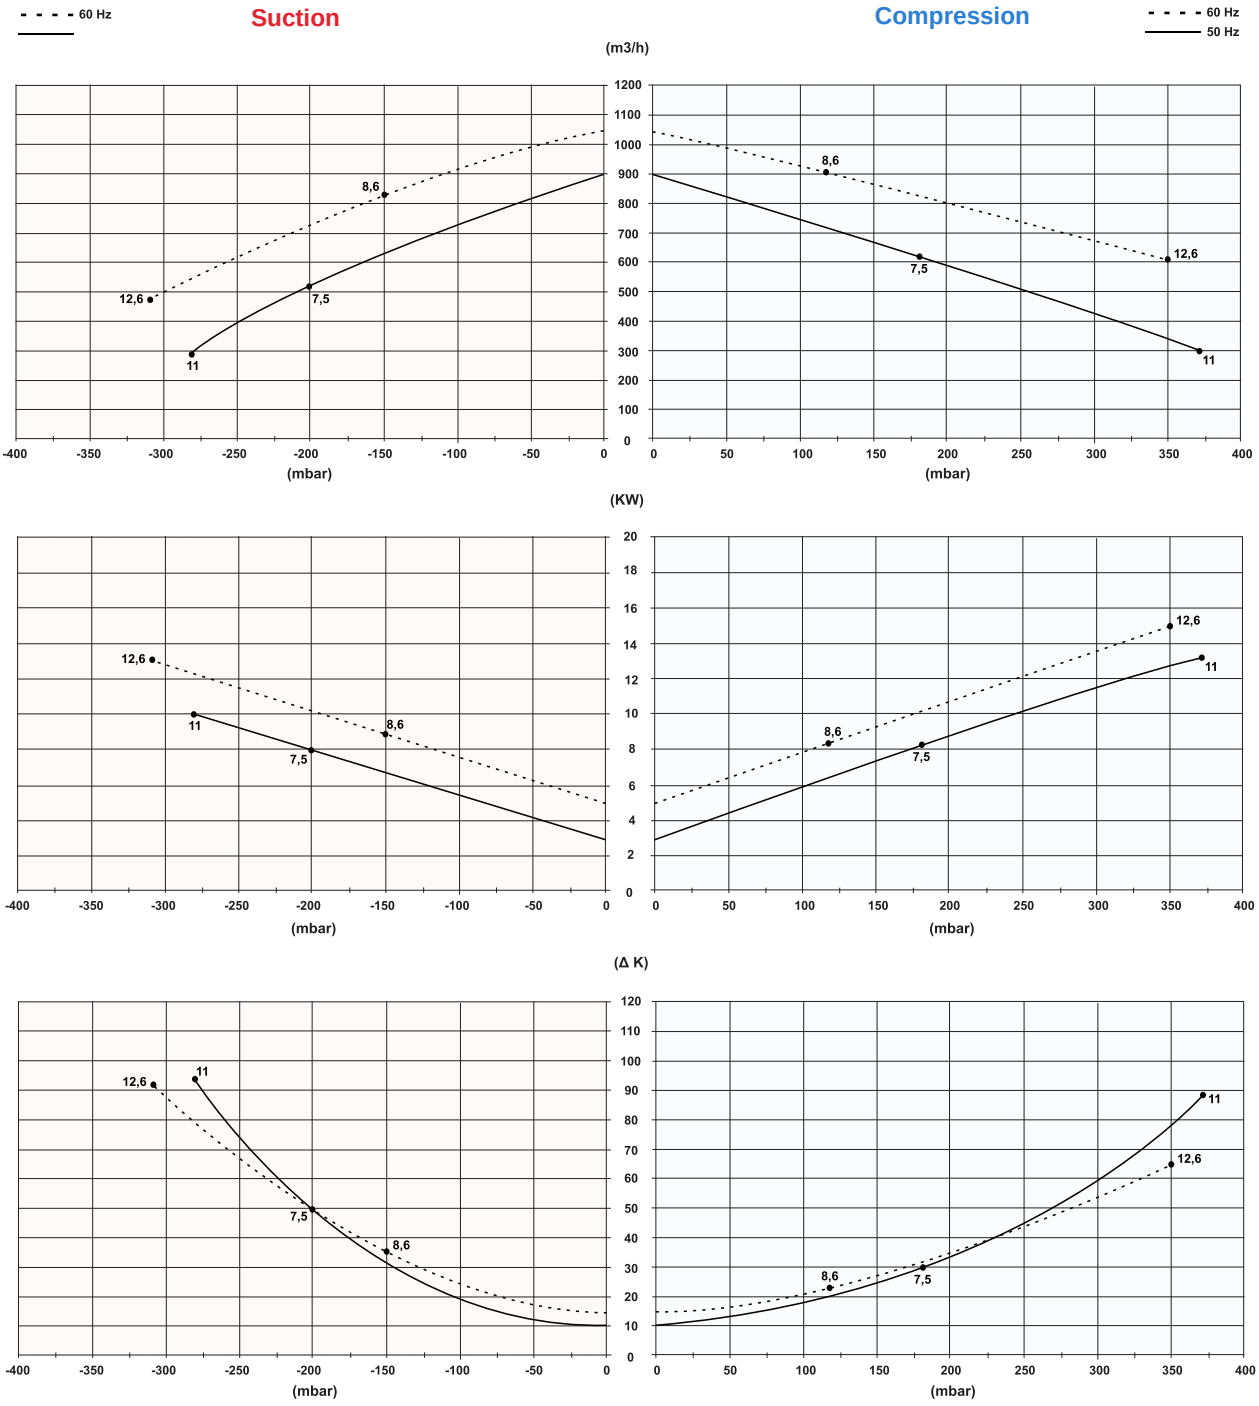

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRC0880-2P: Double flow Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0880-2PT751-7	7,5	50	345-415 Δ / 600-720 Y	16,7 Δ / 9,6 Y	880	-200 / 180	74	91
	8,6	60	380-480 Δ / 660-720 Y	17,3 Δ / 10,0 Y	1080	-150 / 120	78	
STRC0880-2PT112-7	11	50	345-415 Δ / 600-720 Y	28,0 Δ / 16,2 Y	880	-280 / 370	74	110
	12,6	60	380-480 Δ / 660-720 Y	29,0 Δ / 16,7 Y	1080	-310 / 350	78	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C

Inlet temperature: -25°… 40°C


Max. installation height: 1000 m

Bimetal motor protection


Type	Hz	V
STRC ….-..T…-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T…-5	50	500 Δ
	60	575 Δ
STRC ….-..T…-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T…-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A…-1	50	230
	60	230
STRC ….-..S…-5	50	115/230
	60	115/230

Dimensions

HSC0880-2PT751-7

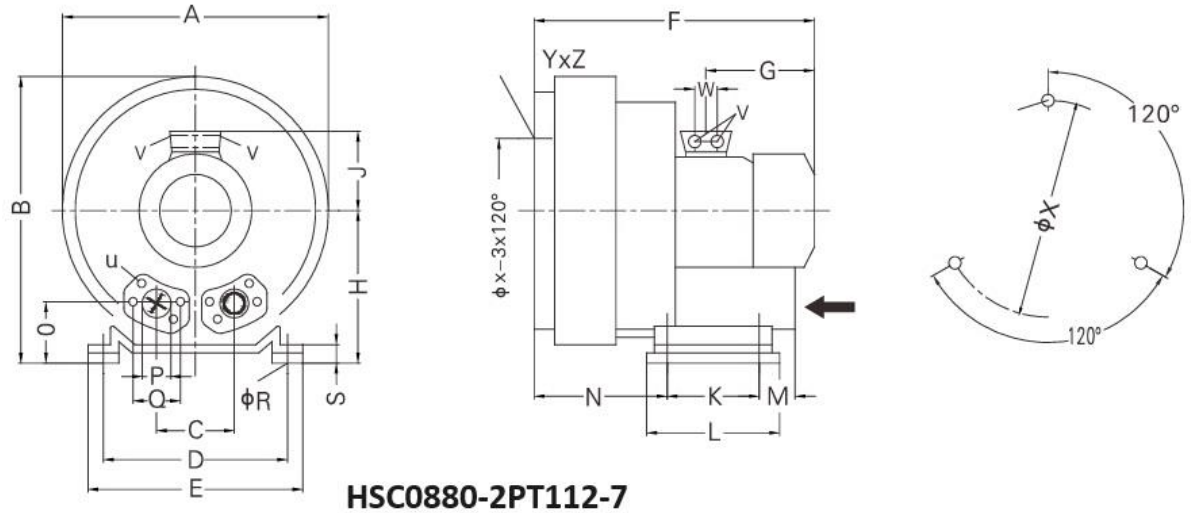

HSC0880-2PT112-7

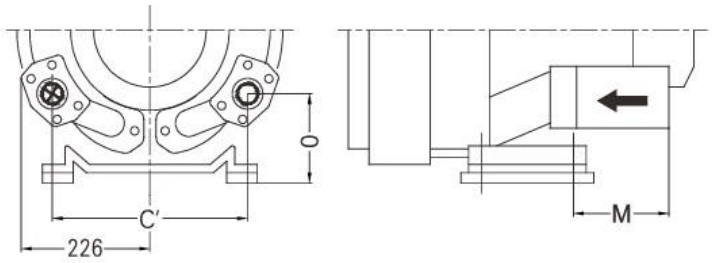

Type	A	B	C	C'	D	E	F	G	H	J	K	L	M	N	O	ϕP	ϕR	S	V	W	ϕX	YxZ	X-Holes
STRC0880-2PT751-7	500	550	152	-	356	394	589	247	300	167	170	217	-	236	125	G 2 1/2"	15	66	4 x M32 x 1,5	42	286	M12 x 20	0/120º/240º
STRC0880-2PT112-7	500	550	-	336	356	394	694	318	300	197	170	217	312	212	165	G 2 1/2"	15	66	4 x M32 x 1,5	54	286	M12 x 20	0/120º/240º

Tel: +1 438-880-4655