
STRC1050-2S: Double stage Side Channel Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

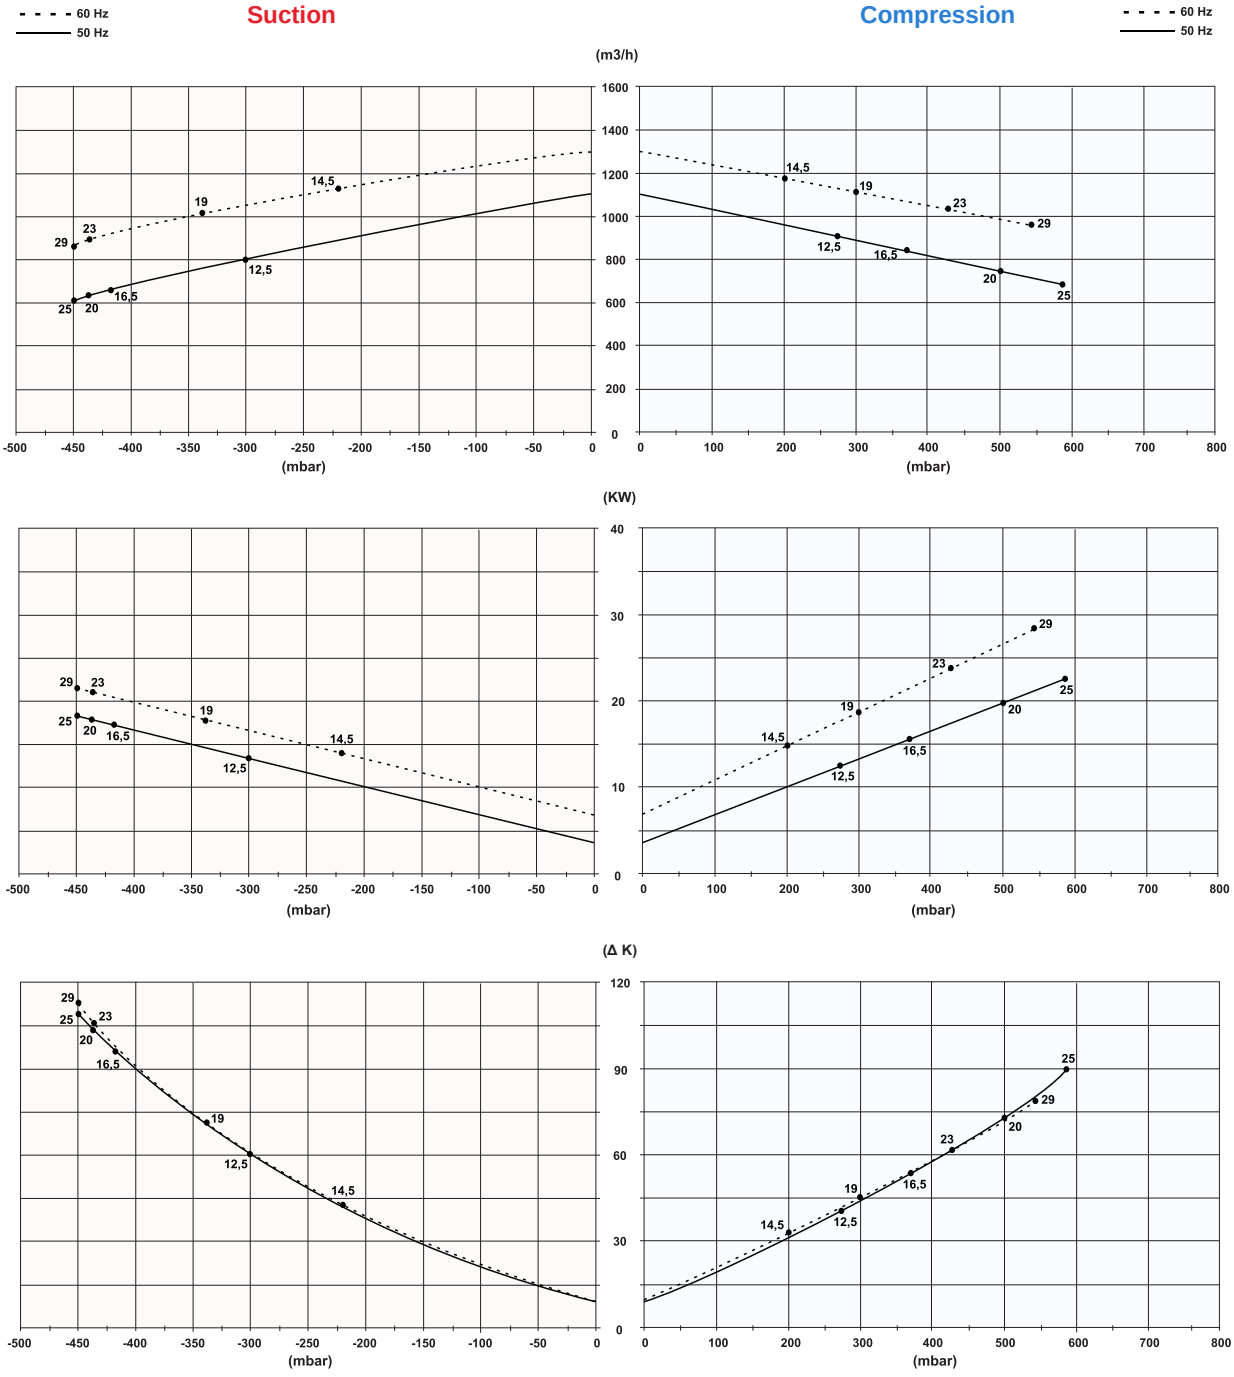

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

STRC1050-2S: Double stage Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC1050-2ST122-7	12,5	50	345-415 Δ / 600-720 Y	28,0 Δ / 16,2 Y	1050	-300 / 270	74	187
	14,5	60	380-480 Δ / 660-720 Y	29,0 Δ / 16,7 Y	1250	-220 / 200	87	
STRC1050-2ST165-7	16,5	50	345-415 Δ / 600-720 Y	35,0 Δ / 20,0 Y	1050	-420 / 370	74	197
	19	60	380-480 Δ / 660-720 Y	36,5 Δ / 21,0 Y	1250	-340 / 300	84	
STRC1050-2ST202-7	20	50	345-415 Δ / 600-720 Y	40,0 Δ / 23,0 Y	1050	-440 / 500	74	204
	23	60	380-480 Δ / 660-720 Y	42,0 Δ / 24,2 Y	1250	-440 / 430	84	
STRC1050-2ST252-7	25	50	345-415 Δ / 600-720 Y	52,0 Δ / 30,0 Y	1050	-450 / 590	74	211
	29	60	380-480 Δ / 660-720 Y	52,0 Δ / 30,0 Y	1250	-450 / 540	84	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T...-5	50	500 Δ
	60	575 Δ
STRC ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A...-1	50	230
	60	230
STRC ….-..S...-5	50	115/230
	60	115/230

Dimensions

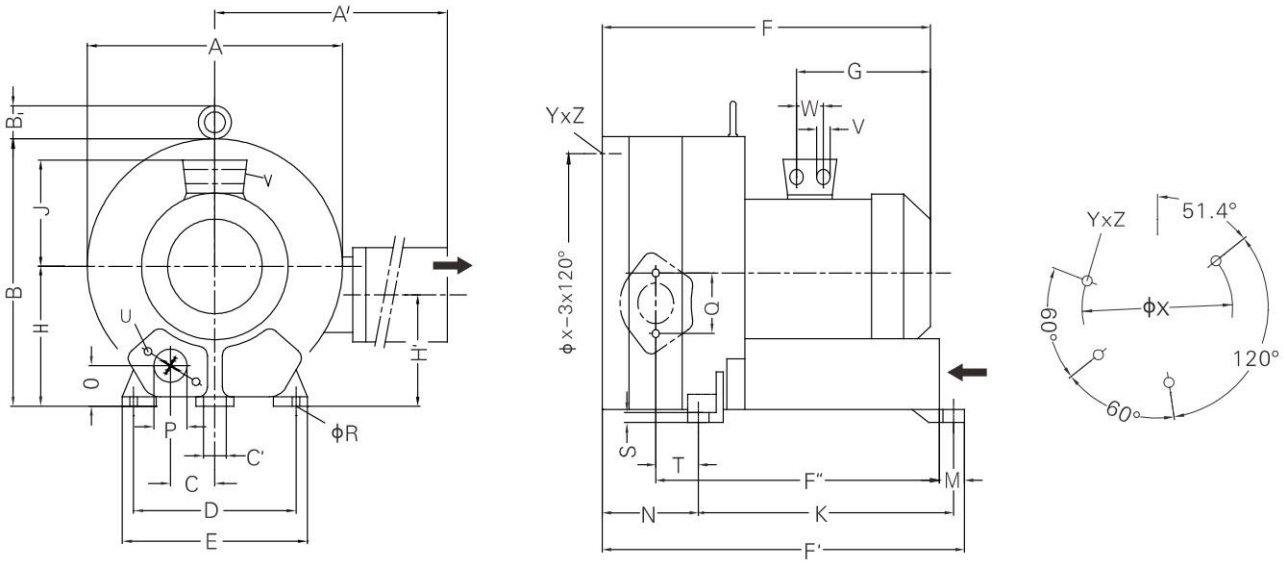

Type	A	A'	B	B'	C	C'	D	E	F	F'	F''	G	H	H'	J	K	M	N	O	ϕP	Q	ϕR	S	T	U	V	W	ϕX	Y_Z	X-Holes
STRC1050-2ST122-7	615	780	607	55	103,5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 x 30	4 x M40 x 1,5	54	490	M12 x 20	51º/120º/240º
STRC1050-2ST165-7	615	780	607	55	103,5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 x 30	4 x M40 x 1,5	54	490	M12 x 20	51º/120º/240º
STRC1050-2ST202-7	615	780	607	55	103,5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 x 30	4 x M40 x 1,5	54	490	M12 x 20	51º/120º/240º
STRC1050-2ST252-7	615	780	607	55	103,5	15	360	415	812	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 x 30	4 x M40 x 1,5	54	490	M12 x 20	51º/120º/240º

Tel: +1 438-880-4655