STRC1370-1M: Single stage Side Channel Blower




- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization


Suction — **Compression**

60 Hz
50 Hz


(m3/h)

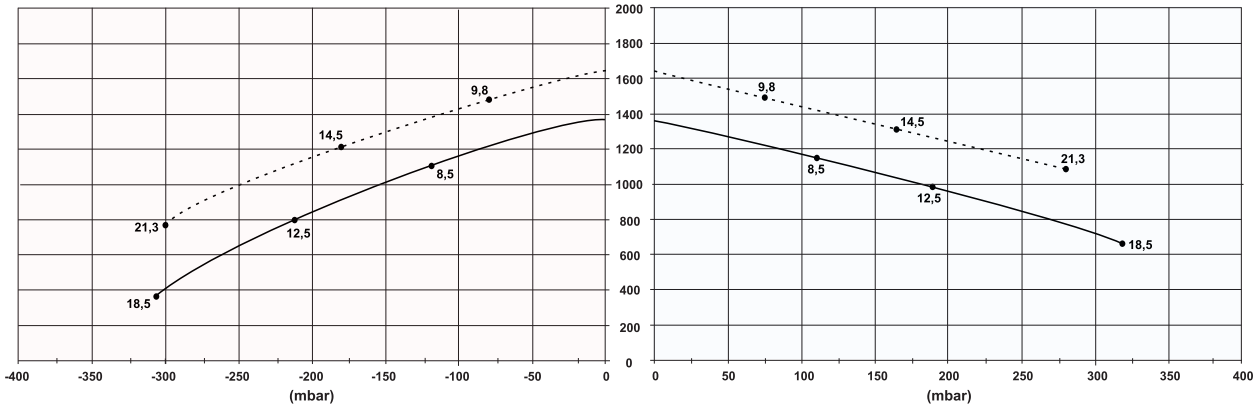

(KW)

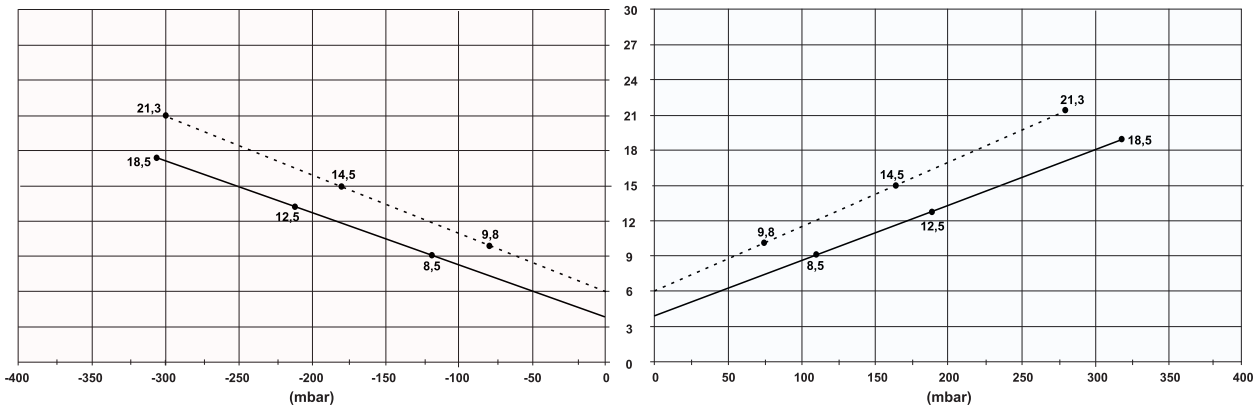

(Δ K)

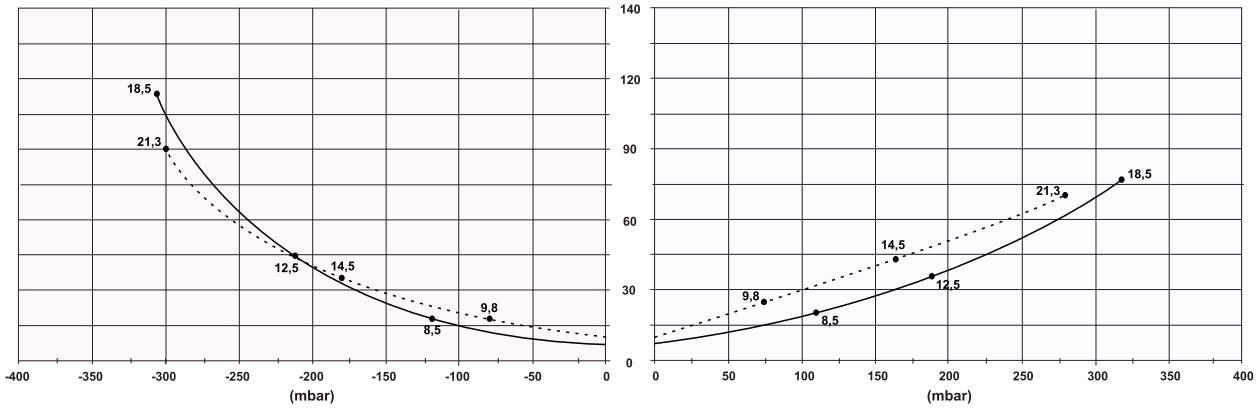

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRC1370-1M: Single stage Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC1370-1MT851-7	8,5	50	345-415 Δ / 600-720 Y	18,2 Δ / 10,5 Y	1370	-120 / 110	75	98
	9,8	60	380-480 Δ / 660-720 Y	18,2 Δ / 10,5 Y	1650	-80 / 75	80	
STRC1370-1MT122-7	12,5	50	345-415 Δ / 600-720 Y	28,0 Δ / 16,2 Y	1370	-210 / 190	75	121
	14,5	60	380-480 Δ / 660-720 Y	29,0 Δ / 16,7 Y	1650	-180 / 160	80	
STRC1370-1MT182-7	18,5	50	345-415 Δ / 600-720 Y	37,0 Δ / 21,0 Y	1370	-310 / 320	75	131
	21,3	60	380-480 Δ / 660-720 Y	39,0 Δ / 22,5 Y	1650	-300 / 280	80	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T…-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T…-5	50	500 Δ
	60	575 Δ
STRC ….-..T…-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T…-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A…-1	50	230
	60	230
STRC ….-..S…-5	50	115/230
	60	115/230

Dimensions

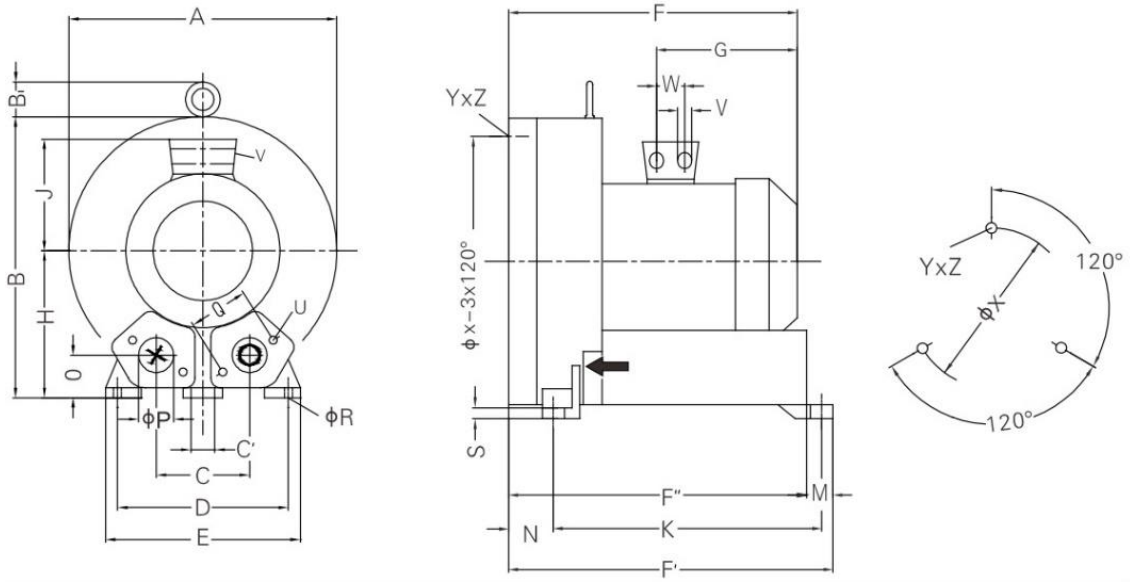

Type	A	B	B'	C	C'	D	E	F	F'	F''	G	H	J	K	M	N	O	P	Q	ϕR	S	U	V	W	ϕX	Y_Z	X-Holes
STRC1370-1MT851-7	550	569	55	207	15	360	415	563	682	643	268	300	167	533	39	127	92	G 4"	150	15	21	M12 x 30	4 x M32 x 1,5	42	490	M12 x 30	0/120º/240º
STRC1370-1MT122-7	550	569	55	207	15	360	415	649	682	643	345	300	167	533	39	127	92	G 4"	150	15	21	M12 x 30	4 x M32 x 1,5	54	490	M12 x 30	0/120º/240º
STRC1370-1MT182-7	550	569	55	207	15	360	415	649	682	643	345	300	167	533	39	127	92	G 4"	150	15	21	M12 x 30	4 x M32 x 1,5	54	490	M12 x 30	0/120º/240º