

STRC2050-2P: Double flow Side Channel Blower




- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

Suction

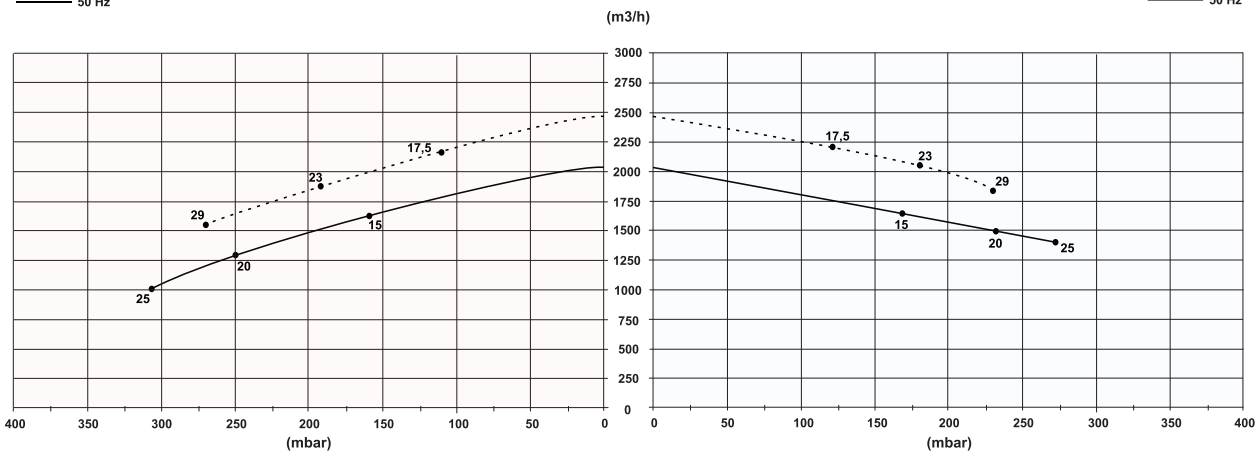

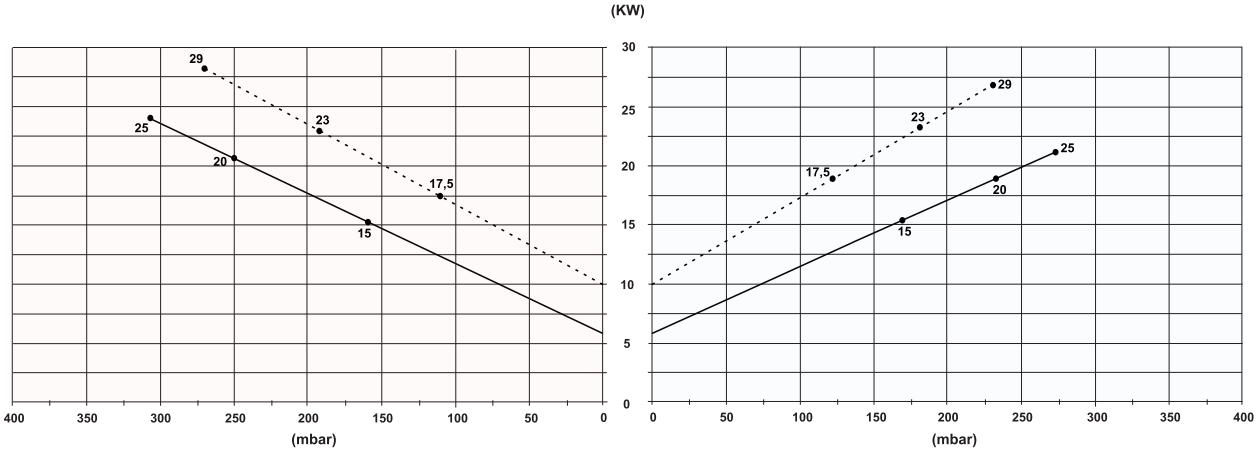

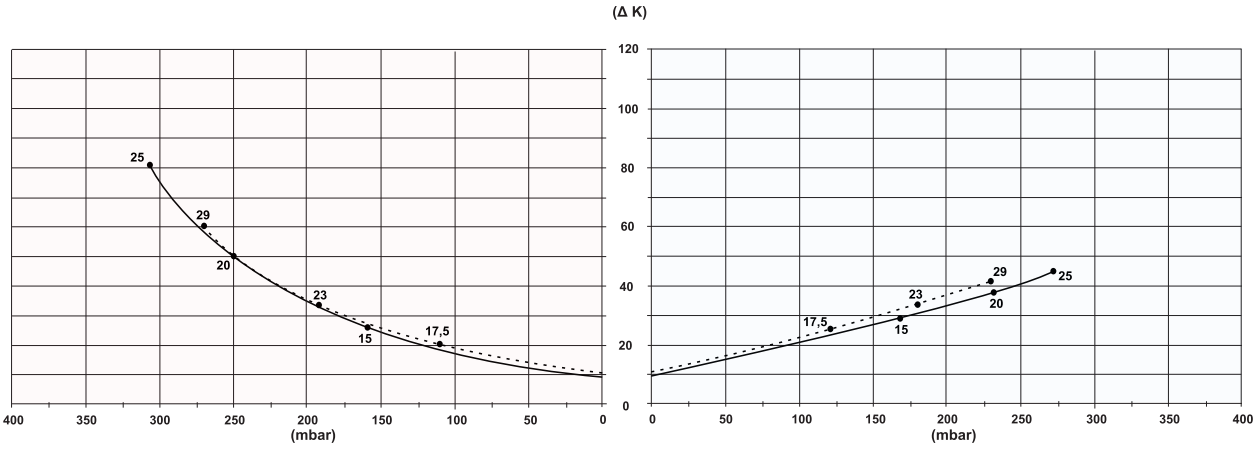

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Compression

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

STRC2050-2P: Double flow Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC2050-2PT152-7	15	50	345-415 Δ / 600-720 Y	35,0 Δ / 20,0 Y	2050	-160 / 170	75	220
	17,5	60	380-480 Δ / 660-720 Y	36,5 Δ / 21,0 Y	2480	-110 / 120	84	
STRC2050-2PT202-7	20	50	345-415 Δ / 600-720 Y	40,0 Δ / 23,0 Y	2050	-250 / 230	75	230
	23	60	380-480 Δ / 660-720 Y	42,0 Δ / 24,2 Y	2480	-190 / 180	84	
STRC2050-2PT252-7	25	50	345-415 Δ / 600-720 Y	52,0 Δ / 30,0 Y	2050	-310 / 270	75	235
	29	60	380-480 Δ / 660-720 Y	52,0 Δ / 30,0 Y	2480	-270 / 230	84	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T…-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T…-5	50	500 Δ
	60	575 Δ
STRC ….-..T…-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T…-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A…-1	50	230
	60	230
STRC ….-..S…-5	50	115/230
	60	115/230

Dimensions

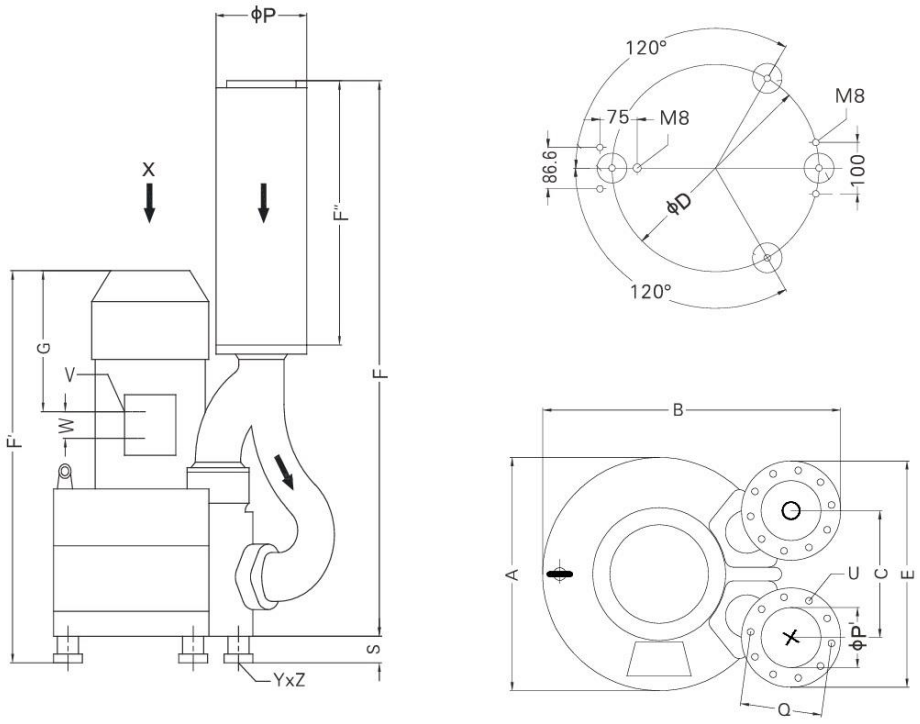

Type	A	B	C	D	E	F	F'	F''	G	P	P'	Q	S	U	V	W	Y_Z
STRC2050-2PT152-7	615	723	307	490	526	1201	848	578	291	219	135	201	58	M8 x 40	4 x M40 x 1,5	54	M12 x 10,5
STRC2050-2PT202-7	615	723	307	490	526	1201	848	578	291	219	135	201	58	M8 x 40	4 x M40 x 1,5	54	M12 x 10,5
STRC2050-2PT252-7	615	723	307	490	526	1201	908	578	351	219	135	201	58	M8 x 40	4 x M40 x 1,5	54	M12 x 10,5