
STRP0045-2S: Double stage High Performance Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

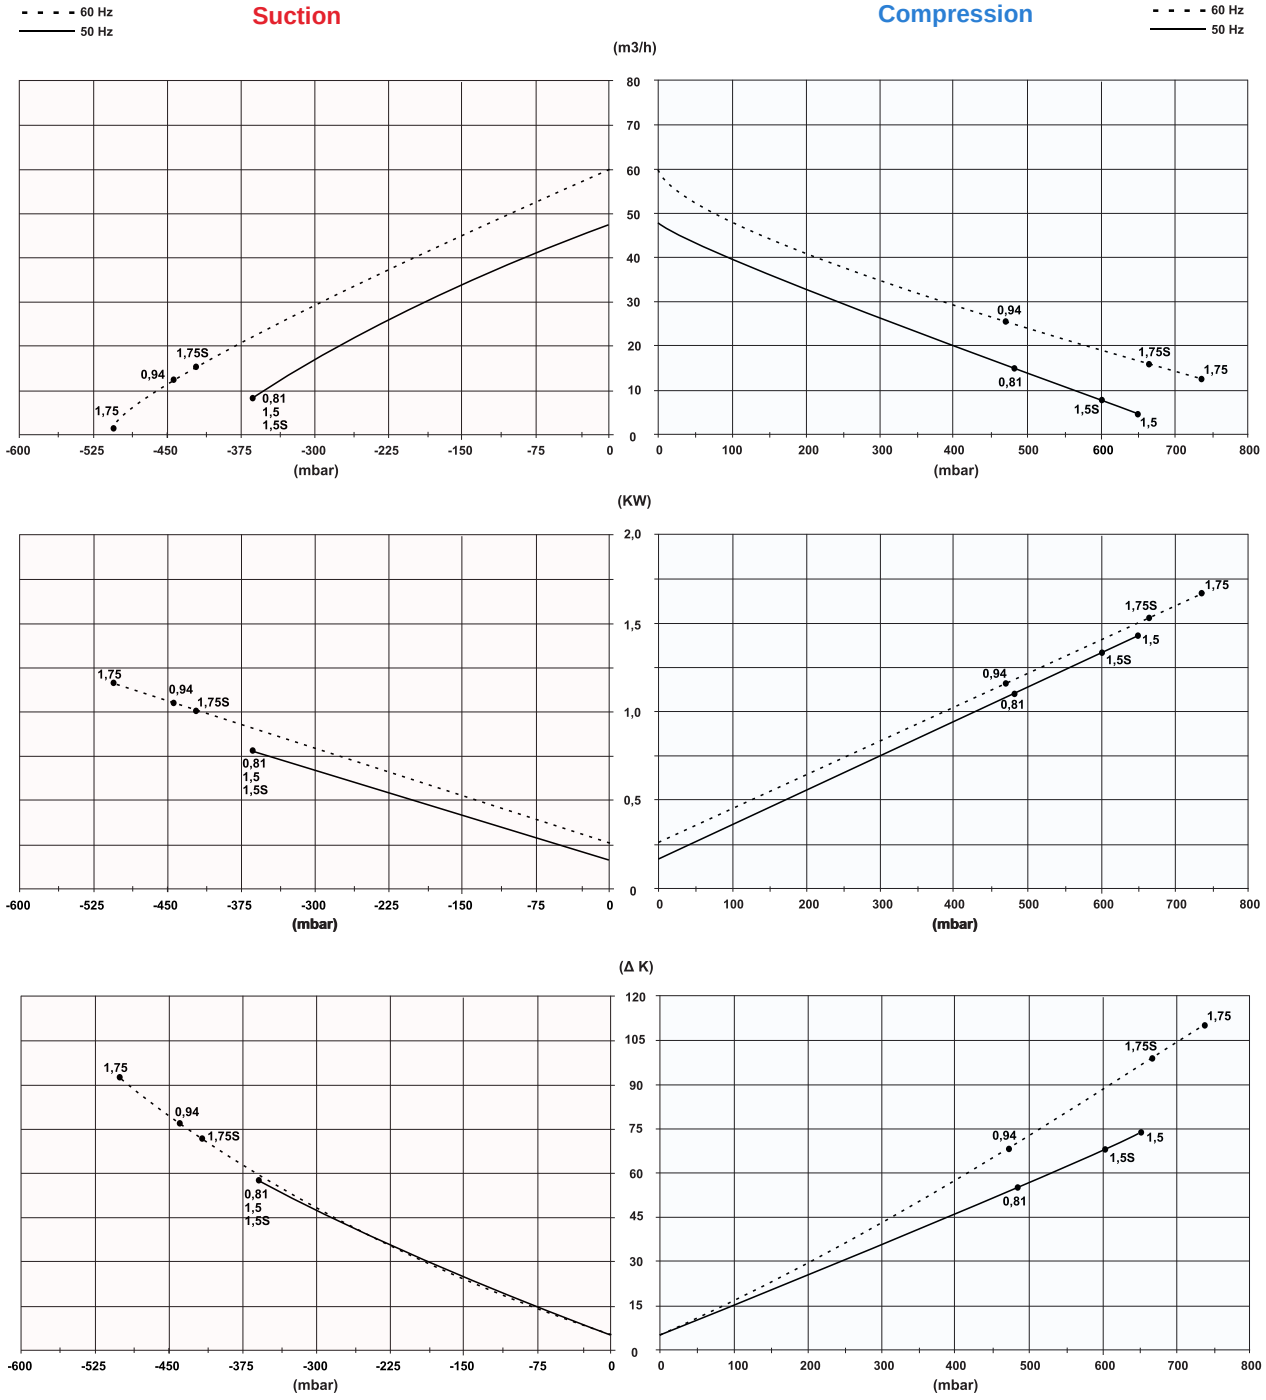

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

STRP0045-2S: Double stage High Performance Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRP0045-2ST810-6	0,81	50	200-240 Δ / 345-415 Y	Δ 4,0 / Y 2,3	47	-370 / 490	58	24
	0,94	60	220-275 Δ / 380-480 Y	Δ 4,0 / Y 2,3	60	-440 / 480	62	
STRP0045-2SA151-1	1,5	50	230	9,7	47	-370 / 600	58	30
	1,75	60	230	10,3	60	-420 / 660	62	
STRP0045-2ST151-6	1,5	50	200-240 Δ / 345-415 Y	Δ 7,5 / Y 4,3	47	-370 / 650	58	28
	1,75	60	220-275 Δ / 380-480 Y	Δ 7,6 / Y 4,4	60	-500 / 740	62	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRP ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRP ….-..T...-5	50	500 Δ
	60	575 Δ
STRP ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRP ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRP ….-..A...-1	50	230
	60	230
STRP ….-..S...-5	50	115/230
	60	115/230

Dimensions

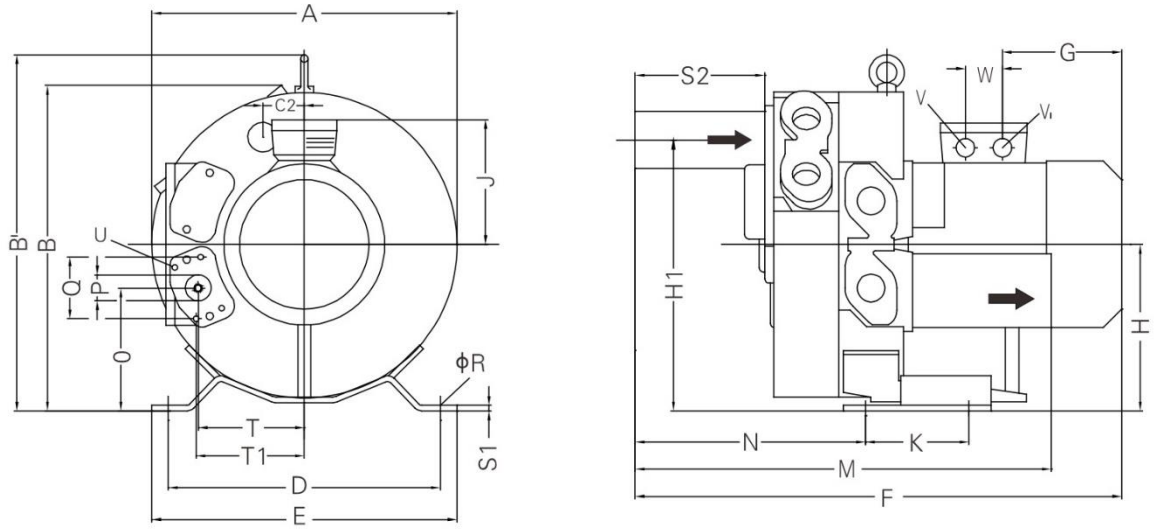

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0045-2ST810-6	313	326	359	43	260	298	469	130	167	272	111	105	426	241	123	G1 ¼"
STRP0045-2SA151-1	313	326	359	43	260	298	525	185	167	272	128	105	426	241	123	G1 ¼"
STRP0045-2ST151-6	313	326	359	43	260	298	525	185	167	272	128	105	426	241	123	G1 ¼"

Type	Q	ØR	S1	S2	S3	T	T1	U	V	V1	W
STRP0045-2ST810-6	64	14	4	140	31	105	107	M6 X 17	M16 X 1,5	M16 X 1,5	32
STRP0045-2SA151-1	64	14	4	140	31	105	107	M6 X 17	M25 X 1,5	M16 X 1,5	32
STRP0045-2ST151-6	64	14	4	140	31	105	107	M6 X 17	M25 X 1,5	M16 X 1,5	32

Tel: +1 438-880-4655