
STRP0065-1M: Single stage High Performance Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

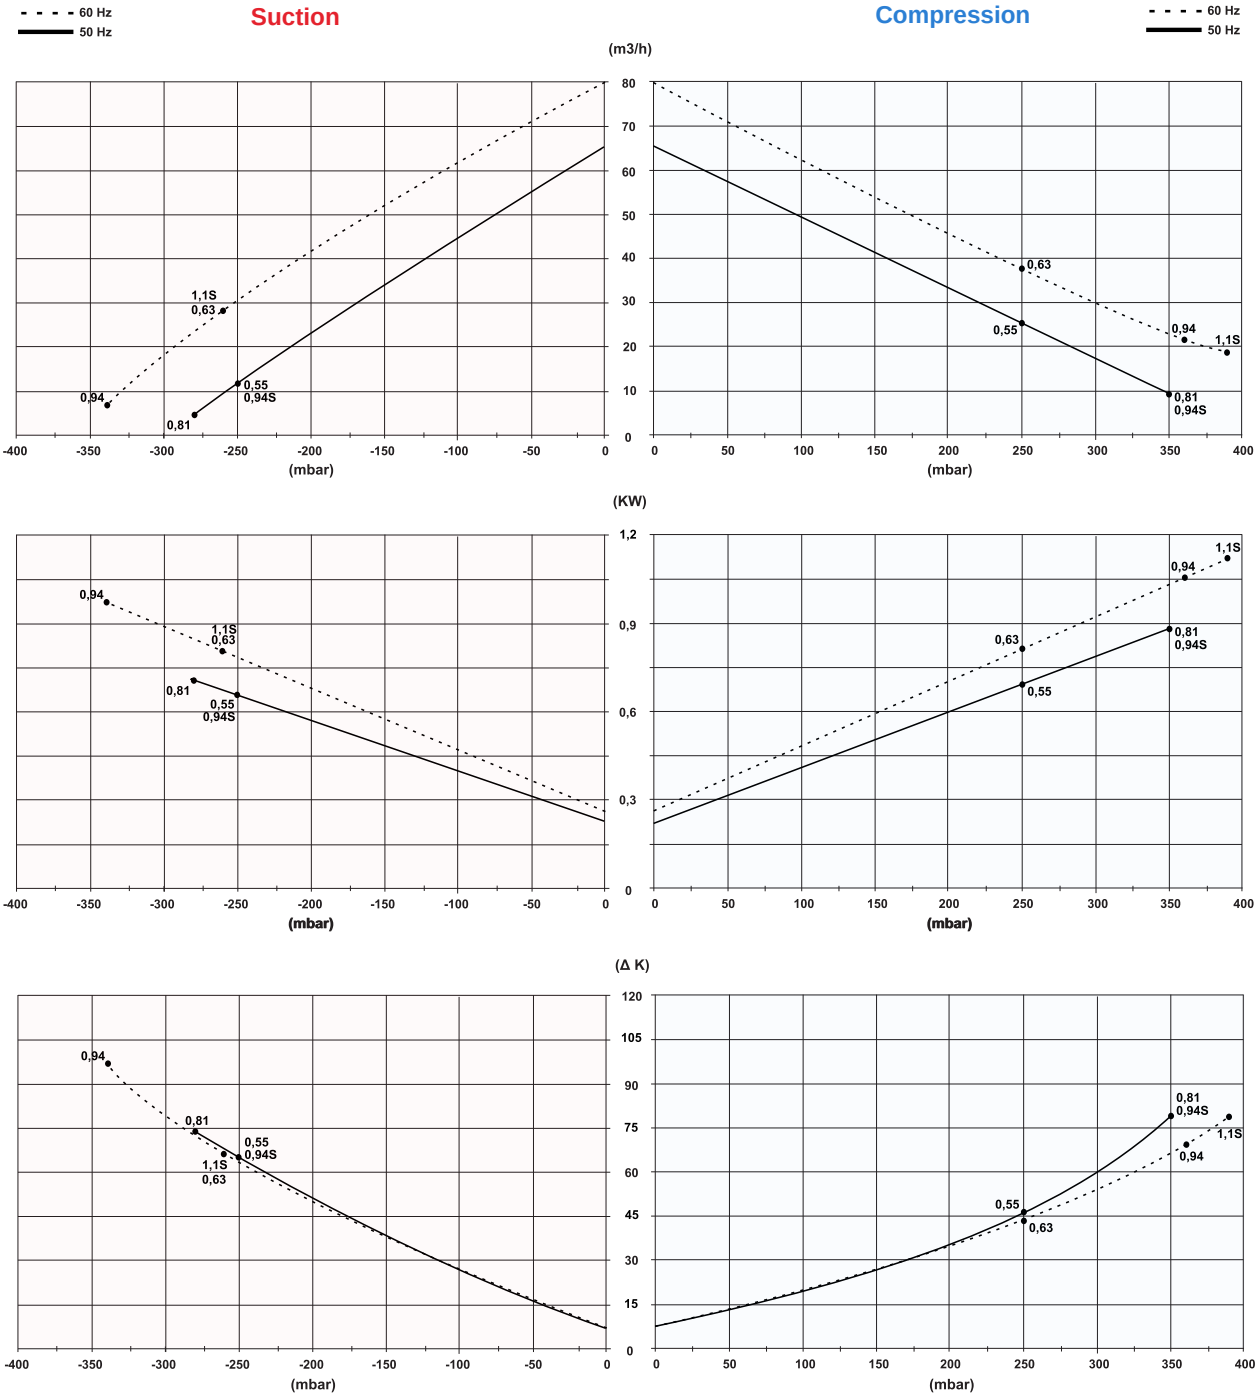

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

STRP0065-1M: Single stage High Performance Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRP0065-1MT550-6	0,55	50	200-240 Δ / 345-415 Y	Δ 3,4 / Y 1,8	66	-250 / 250	57	16
	0,63	60	220-275 Δ / 380-480 Y	Δ 3,7 / Y 2,1	80	-260 / 250	62	16
STRP0065-1MT810-6	0,81	50	200-240 Δ / 345-415 Y	Δ 4,0 / Y 2,3	66	-280 / 350	57	17
	0,94	60	220-275 Δ / 380-480 Y	Δ 4,0 / Y 2,3	80	-340 / 360	62	17
STRP0065-1MA940-1	0,94	50	230	9	66	-250 / 350	57	18
	1,1	60	230	9	80	-280 / 390	62	18

1) Other voltages are available on request


2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C
Inlet temperature: -25°… 40°C
Max. installation height: 1000 m
Bimetal motor protection

Type	Hz	V
STRP ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRP ….-..T...-5	50	500 Δ
	60	575 Δ
STRP ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRP ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRP ….-...A...-1	50	230
	60	230
STRP ….-...S...-5	50	115/230
	60	115/230

Dimensions

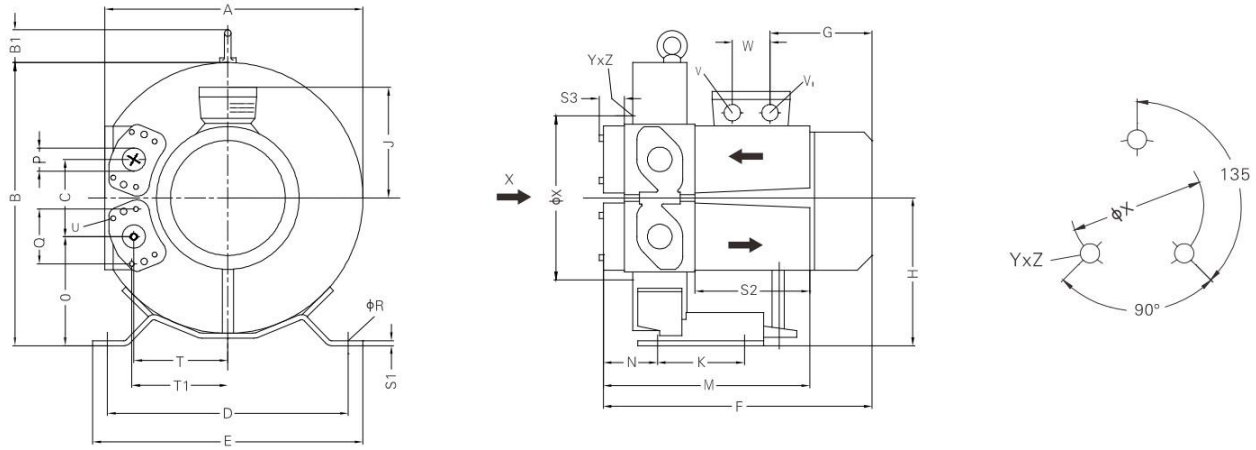

Type	A	B	B1	C	D	E	F	G	H	J	K	M	N	O	P
STRP0065-1MT550-6	313	339	39	94	290	325	295	153	177	120	105	256	67	130	G1 ¼"
STRP0065-1MT810-6	313	339	39	94	290	325	295	153	177	120	105	256	67	130	G1 ¼"
STRP0065-1MA940-1	313	339	39	94	290	325	295	153	177	120	105	256	67	130	G1 ¼"

Type	Q	R	S1	S2	S3	T	T1	U	V	V1	W	X	Y x Z
STRP0065-1MT550-6	64	14	4	140	31	114	116	M6 X 17	M25 X 1,5	M16 X 1,5	32	153	M6 X 15
STRP0065-1MT810-6	64	14	4	140	31	114	116	M6 X 17	M25 X 1,5	M16 X 1,5	32	153	M6 X 15
STRP0065-1MA940-1	64	14	4	140	31	114	116	M6 X 17	M25 X 1,5	M16 X 1,5	32	153	M6 X 15