
STRP0065-2S: Double stage High Performance Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

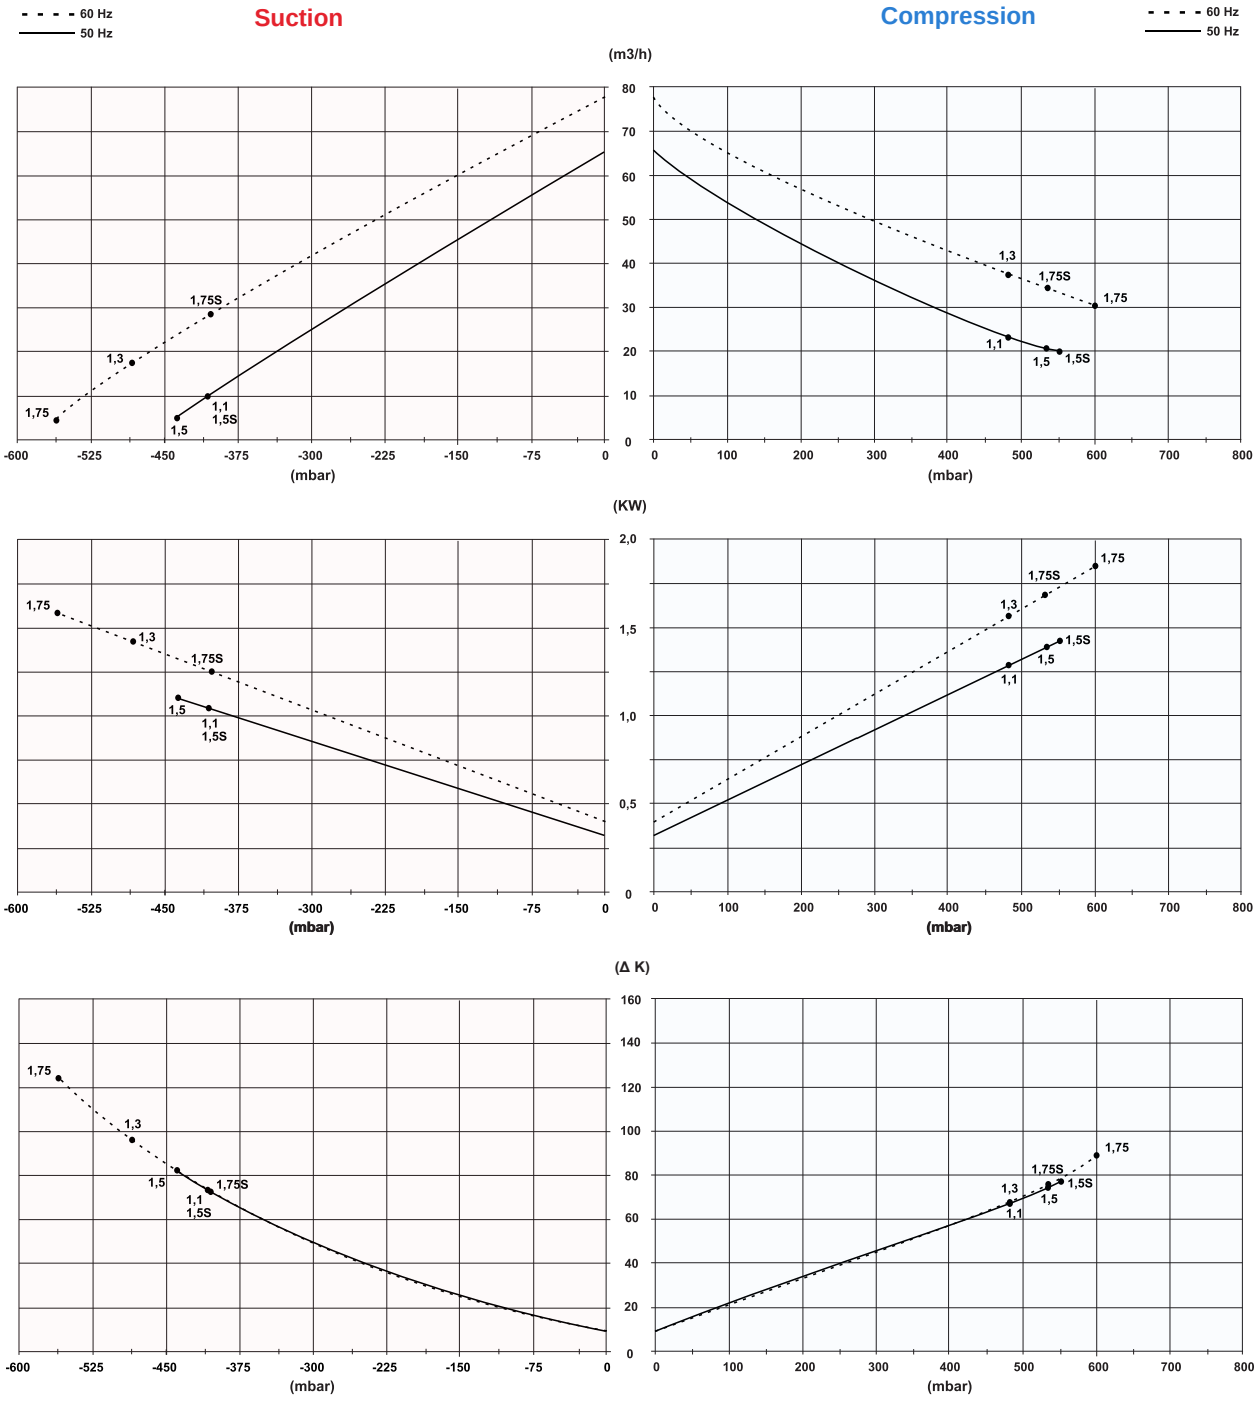

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

STRP0065-2S: Double stage High Performance Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRP0065-2ST111-6	1,1	50	200-240 Δ / 345-415 Y	Δ 5,4 / Y 3,1	65	-400 / 480	59	29
	1,3	60	220-275 Δ / 380-480 Y	Δ 5,4 / Y 3,1	76	-480 / 480	63	
STRP0065-2SA151-1	1,5	50	230	9,7	65	-400 / 550	59	32
	1,75	60	230	10,3	76	-390 / 540	63	
STRP0065-2ST151-6	1,5	50	200-240 Δ / 345-415 Y	Δ 7,5 / Y 4,3	65	-440 / 540	59	30
	1,75	60	220-275 Δ / 380-480 Y	Δ 7,6 / Y 4,4	76	-560 / 600	63	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRP ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRP ….-..T...-5	50	500 Δ
	60	575 Δ
STRP ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRP ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRP ….-..A...-1	50	230
	60	230
STRP ….-..S...-5	50	115/230
	60	115/230

Dimensions

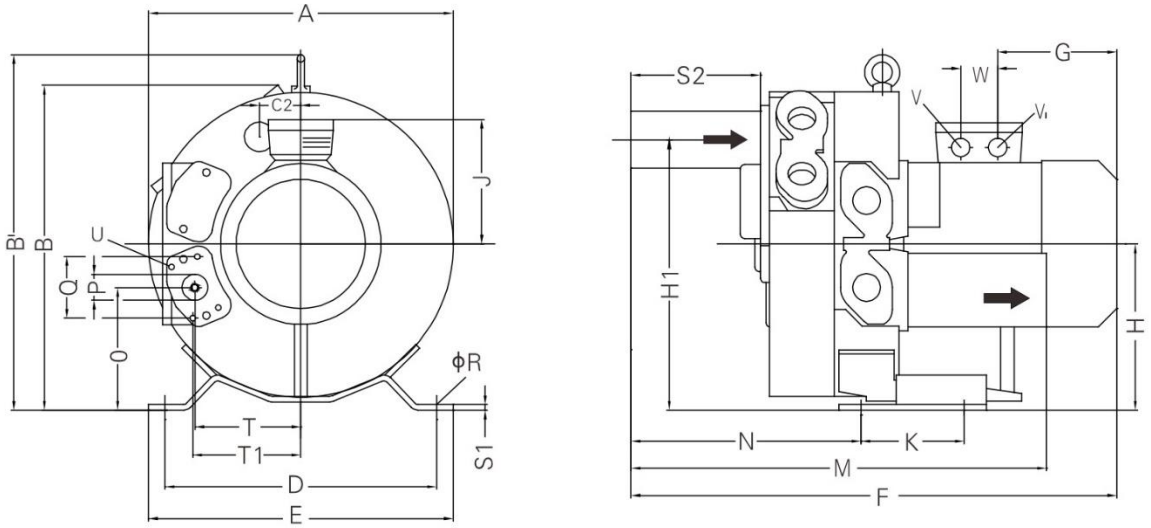

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0065-2ST111-6	331	345	380	47	290	325	390	153	177	291	120	105	431	243	130	G1 ¼"
STRP0065-2SA151-1	331	345	380	47	290	325	421	185	177	291	128	105	431	243	130	G1 ¼"
STRP0065-2ST151-6	331	345	380	47	290	325	421	185	177	291	128	105	431	243	130	G1 ¼"

Type	Q	ØR	S1	S2	S3	T	T1	U	V	V1	W
STRP0065-2ST111-6	64	14	4	140	31	114	116	M6 x 17	M25 x 1,5	M16 x 1,5	32
STRP0065-2SA151-1	64	14	4	140	31	114	116	M6 x 17	M25 x 1,5	M25 x 1,5	32
STRP0065-2ST151-6	64	14	4	140	31	114	116	M6 x 17	M25 x 1,5	M16 x 1,5	32

Tel: +1 438-880-4655