
STRP0085-2S: Double stage High Performance Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

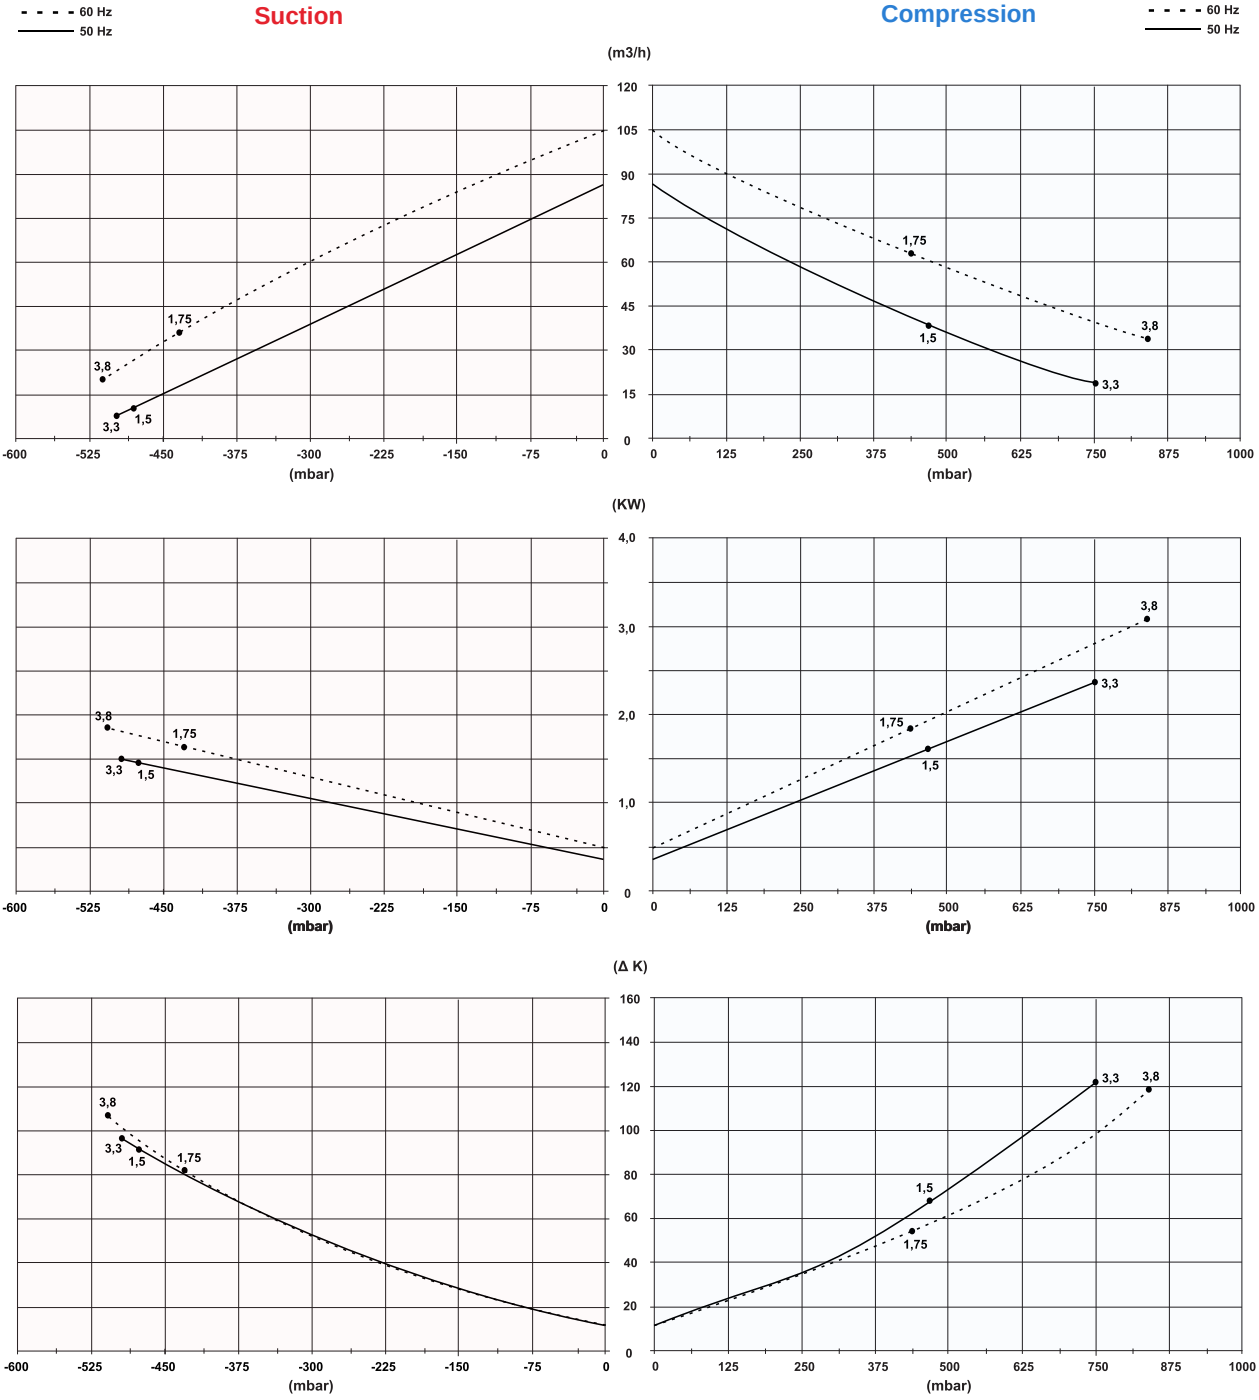

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRP0085-2S: Double stage High Performance Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRP0085-2ST151-6	1,5	50	200-240 Δ / 345-415 Y	Δ 7,5 / Y 4,3	87	-480 / 450	61	33
	1,75	60	220-275 Δ / 380-480 Y	Δ 7,6 / Y 4,4	105	-430 / 410	66	
STRP0085-2ST331-6	3,3	50	200-240 Δ / 345-415 Y	Δ 13,0 / Y 7,5	87	-500 / 750	61	39
	3,8	60	220-275 Δ / 380-480 Y	Δ 13,8 / Y 8,0	105	-510 / 850	66	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRP ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRP ….-..T...-5	50	500 Δ
	60	575 Δ
STRP ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRP ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRP ….-..A...-1	50	230
	60	230
STRP ….-..S...-5	50	115/230
	60	115/230

Dimensions

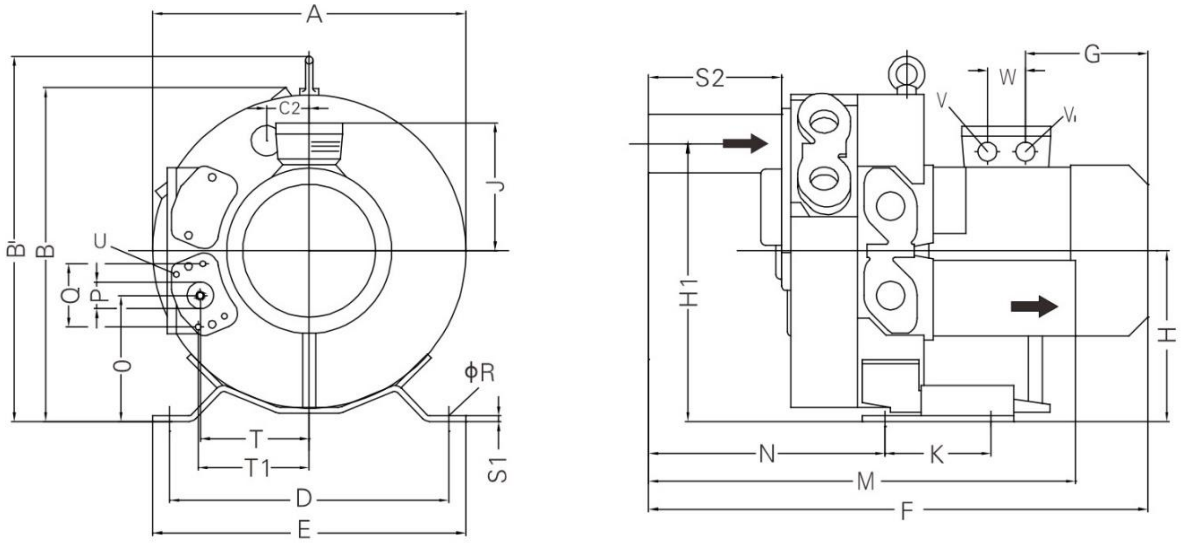

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0085-2ST151-6	363	377	414	52	315	350	529	180	195	319	128	130	436	243	143	G1 ¼"
STRP0085-2ST331-6	363	377	414	52	315	350	554	211	195	319	128	130	436	243	143	G1 ¼"

Type	Q	ØR	S1	S2	S3	T	T1	U	V	V1	W
STRP0085-2ST151-6	64	14	4	140	31	125	127	M6 x 17	M25 x 1,5	M16 x 1,5	32
STRP0085-2ST331-6	64	14	4	140	31	125	127	M6 x 17	M25 x 1,5	M16 x 1,5	32

Tel: +1 438-880-4655