
STRP0165-1M: Single stage High Performance Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

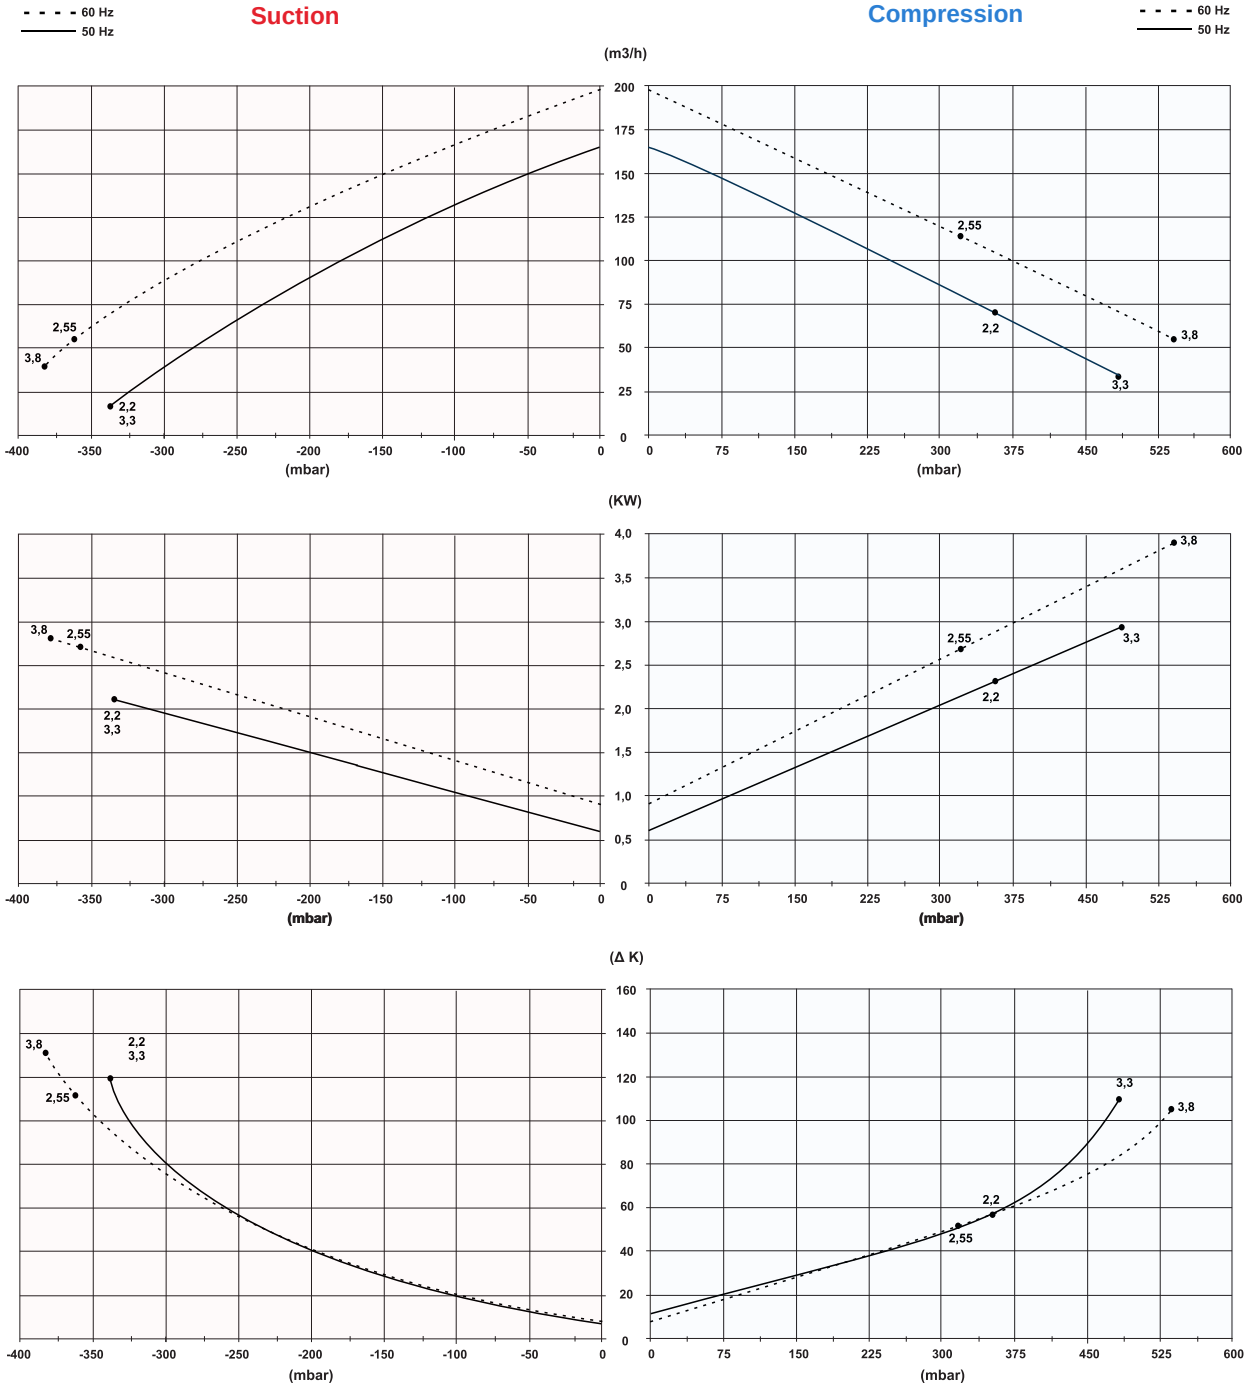

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRP0165-1M: Single stage High Performance Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRP0165-1MT221-6	2,2	50	200-240 Δ / 345-415 Y	Δ 11,4 / Y 6,6	165	-340 / 360	65	32
	2,55	60	220-275 Δ / 380-480 Y	Δ 11,2 / Y 6,5	195	-360 / 315	71	
STRP0165-1MT331-6	3,3	50	200-240 Δ / 345-415 Y	Δ 13,0 / Y 7,5	165	-340 / 480	65	35
	3,8	60	220-275 Δ / 380-480 Y	Δ 14,2 / Y 8,2	195	-380 / 530	71	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRP ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRP ….-..T...-5	50	500 Δ
	60	575 Δ
STRP ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRP ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRP ….-..A...-1	50	230
	60	230
STRP ….-..S...-5	50	115/230
	60	115/230

Dimensions

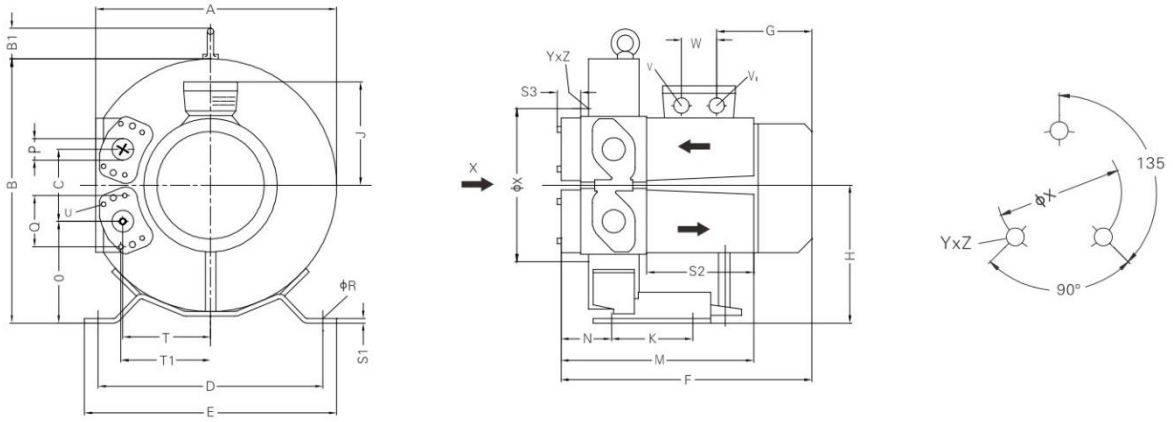

Type	A	B	B1	C	D	E	F	G	H	J	K	M	N	O	P
STRP0165-1MT221-6	418	455	39	127	371	406	364	185	235	128	152	271	72	172	G1 ¼"
STRP0165-1MT331-6	418	455	39	127	371	406	390	211	235	128	152	271	72	172	G1 ¼"

Type	Q	R	S1	S2	S3	T	T1	U	V	V1	W	X	Y x Z
STRP0165-1MT221-6	64	14	5	140	31	153	155	M6 X 17		M16 X 1,5	32	228	M8 X 15
STRP0165-1MT331-6	64	14	5	140	31	153	155	M6 X 17		M16 X 1,5	32	228	M8 X 15

Tel: +1 438-880-4655