




- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

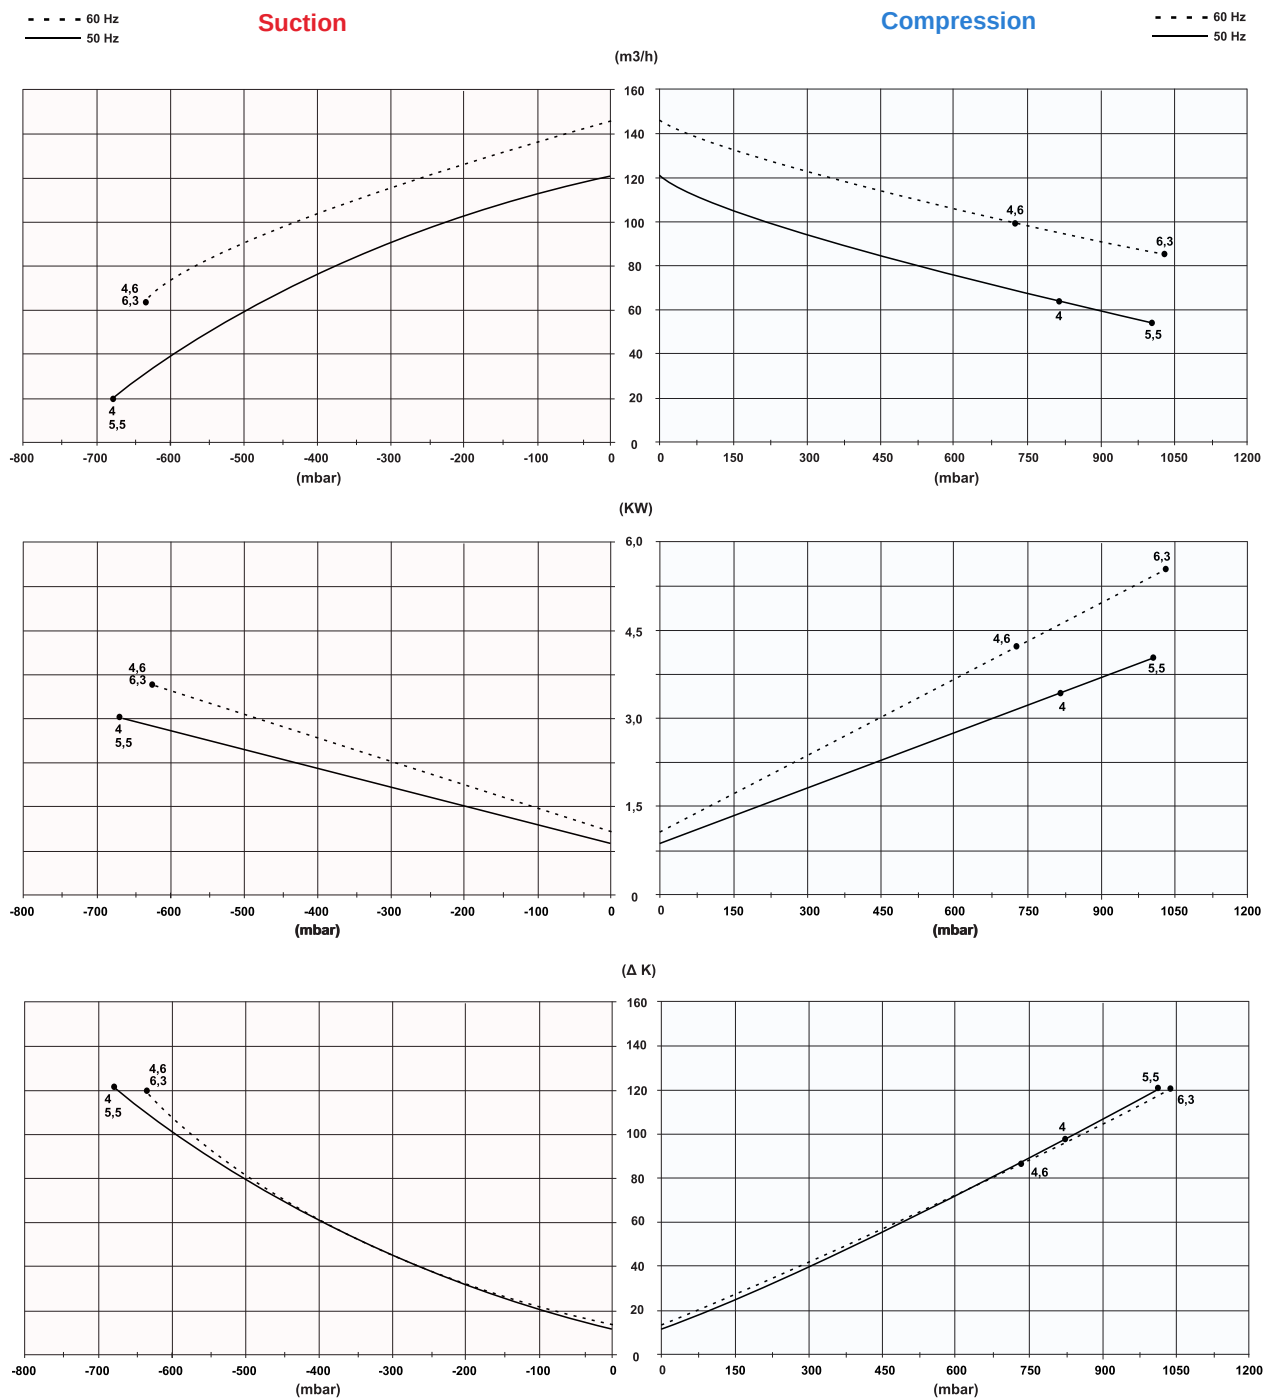

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Technical data

Type	kW	Hz	V ¹⁾	A	m³/h	hPa (mbar) ²⁾	dB(A) ³⁾	kg
STRP0120-3ST401-7	4	50	345-415 Δ / 600-720 Y	Δ 9,0 / Y 4,4	122	-680 / 820	67	62
	4.6	60	380-480 Δ / 660-720 Y	Δ 9,5 / Y 4,5	147	-640 / 730	73	
STRP0120-3ST551-7	5.5	50	345-415 Δ / 600-720 Y	Δ 13.3 / Y 7.7	122	-680 / 1000	67	68
	6.3	60	380-480 Δ / 660-720 Y	Δ 13.3 / Y 7.7	147	-640 / 1030	73	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°... 40°C



Inlet temperature: -25°... 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRPT....-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRPT....-5	50	500 Δ
	60	575 Δ
STRPT....-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRPT....-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRPA....-1	50	230
	60	230
STRPS....-5	50	115/230
	60	115/230

Dimensions

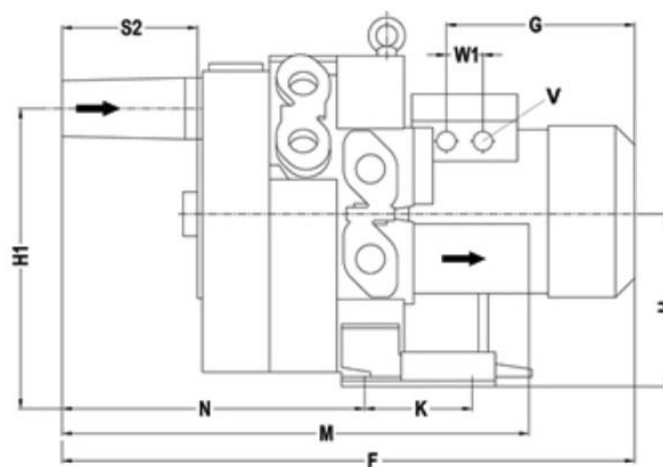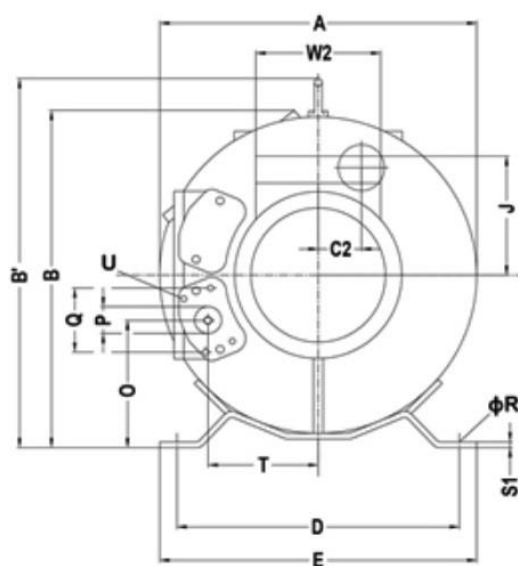

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0120-3ST401-7	387	402	432	57	328	363	682	252	206	344	148	152	532	333	149	G1 ¼"
STRP0120-3ST551-7	442	402	432	63	371	406	717	274	236	389	148	152	539	336	172	G1 ¼"
Type	Q	ØR	S1	S2	T	U			V			W1		W2		
STRP0120-3ST401-7	64	14	5	143	137	M6 x 17			M32 x 1,5			42		120		
STRP0120-3ST551-7	64	14	5	146	153	M6 x 17			M32 x 1,5			42		120		