


REGENERATIVE BLOWER · BIOGAS

The **leak-tight** biogas blower.

Compact · Pulsation-free · Simple.

A gearless, oil-free regenerative blower built to move corrosive biogas around the clock. No gearbox, no belts, no shaft seals.

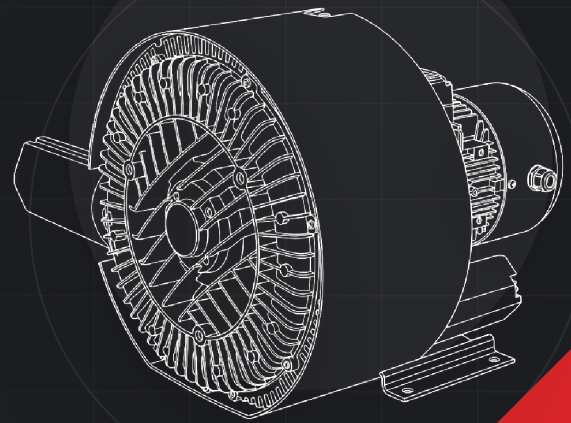

Biogas · Digester gas · 24/7 duty

5-2000 CFM

FLOW RANGE

+15 psig

MAX. PRESSURE

-8.35 psi

MAX. VACUUM

100 %

OIL-FREE CHAMBER

24/7

CONTINUOUS DUTY

THE PROBLEM WITH PD BLOWERS

Biogas is wet, flammable and loaded with H₂S. Positive-displacement blowers handle it with a **gearbox, belts and pulleys, six bearings** and mechanical shaft seals.

Every one of those parts wears, needs service and is a potential leak path. Their pulsating flow shakes pipework and adds noise, dampers and cost to the installation.

OUR ANSWER

A **direct-drive regenerative blower** with a **magnetic coupling**: the gas chamber is sealed off from the motor, with no shaft seal to leak and no oil in the gas path.

Nickel-coated internals resist H₂S corrosion, and the smooth, **pulsation-free** flow keeps the system quiet and the setup simple. Fewer parts, smaller footprint than PD or multistage centrifugal units.

BUILT FOR BIOGAS




1 Protective coatings

Nickel, Cerakote, anodization and more to defend against H₂S corrosion.



2 Aluminium impeller & housing

Non-ferrous construction to reduce spark risk.

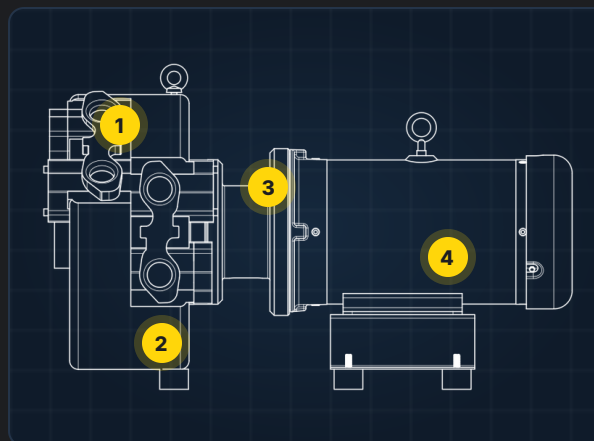

3 Magnetic coupling

No mechanical shaft seal: hazardous gas stays inside.



4 Certified motor

Class 1 Div. 1 Groups C & D, Class 2 Div. 2 Groups F & G.

RADICALLY SIMPLE BY DESIGN

1

Direct-drive motor

0

Gearbox, belts or pulleys

4

Bearings (vs. 6 on PD)


0

Shaft seals or oil

— FEATURE · ADVANTAGE · BENEFIT

FEATURE	ADVANTAGE	YOUR BENEFIT
Compact design	Smaller footprint than PD blowers and multistage centrifugal	Less space, lower installation cost
Gearless direct drive	No gearbox, pulley or belt to maintain	Lower operating cost, fewer repairs
4-bearing configuration	Fewer wearing parts than a 6-bearing PD blower	Lower replacement cost, less downtime
Pulsation-free airflow	Drastically cuts system vibration and noise	Safer, quieter site, cheaper setup
Premium nickel coating	Internal defence against H ₂ S corrosion	Longer equipment life, long-term value
Magnetic coupling	Removes mechanical shaft seals	No hazardous gas leaks, full peace of mind
100% oil-free chamber	No oil contamination in the gas stream	Pure biogas, protected downstream equipment
VFD compatible	Dynamic speed and flow control	Optimized efficiency, lower power bills
Continuous operation	Built for demanding 24/7 high-speed cycles	Reliable, uninterrupted operation

— OPERATING RANGE

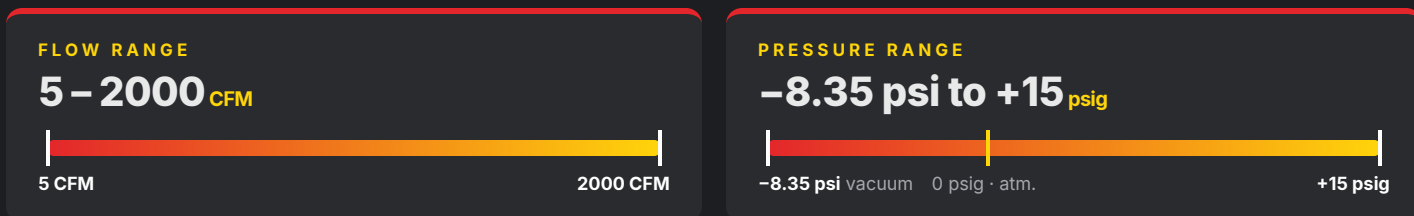

— OPTIONS & CERTIFICATIONS

Coatings Nickel, Cerakote, anodization and more, matched to your gas composition.	Hazardous-location motors Class 1 Div. 1 Groups C & D · Class 2 Div. 2 Groups F & G. cULus listed.	Variable speed VFD-ready for dynamic flow control across your operating range.
--	---	---

Let's size your blower.

Send us your flow, pressure and gas composition.

EMAIL abruens@id-industries.com
INFO info@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com