

REGENERATIVE BLOWER BOOSTER · 2:1

The first **leak-tight** electric air booster.

Double your air pressure right where you need it.
No compressed air consumed. No oil.

Compressed air · Nitrogen · Other process gases



2:1

PRESSURE RATIO

400 psig

MAX. PRESSURE

35 SCFM

CONTINUOUS FLOW

15,000 RPM

HIGH-SPEED DESIGN

~50%

LESS ENERGY*

THE PROBLEM WITH PNEUMATIC BOOSTERS

In most plants, pressure losses along the network leave some machines short of pressure. The usual fix is an air-driven (pneumatic) booster. The catch: it **consumes compressed air to raise pressure**.


Every cubic foot it draws from the main line lowers line pressure even further for everything else on the network. The result is a vicious circle: more air demand, lower line pressure, a compressor working harder, and typically **about twice the energy** of an electric booster doing the same job.

Piston boosters avoid the drive air but bring rings, sleeves, a crankshaft, many bearings, friction, wear and a risk of oil in your air.


OUR ANSWER

Our booster is a high-speed **regenerative blower** driven by an **electric motor**, not by compressed air. It doubles the pressure of the air or gas it receives. Nothing is exhausted, nothing is borrowed from the network.

PNEUMATIC BOOSTER (TODAY)

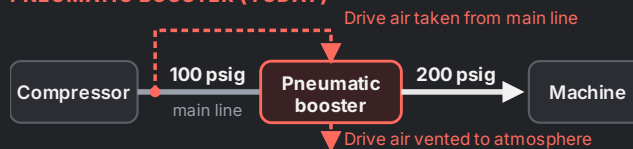

ID ELECTRIC BOOSTER

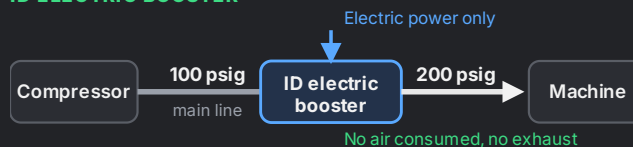

RADICALLY SIMPLE BY DESIGN

A two-stage regenerative blower: one electric motor, one shaft, two impellers, two bearings. That's the whole machine. Running at up to **15,000 RPM**, it is far more compact and lighter than a piston booster of similar capacity.

1

Electric motor

1

Shaft

2

Impellers

2

Bearings

INLET
100 psig



OUTLET
200 psig

INLET
200 psig



OUTLET
400 psig

Need more?
Install in series.

WHY SWITCH FROM A PNEUMATIC BOOSTER

No wasted compressed air

A 2:1 pneumatic booster exhausts about 1.2× the air it delivers.

Line pressure stays up

No more pressure drop for every other machine.

One unit, full flow

35 SCFM continuous, where pneumatic units must be doubled up.

Reaches 400 psig

Most 2:1 pneumatic boosters stop at 230 to 300 psi.

Almost no maintenance

No seals or pistons to rebuild. Bearings every 2.5 to 3 years.

Oil-free, leak-tight

Clean air, no exhaust, no noise from venting.

ID BOOSTER VS. PNEUMATIC BOOSTERS

	ID ELECTRIC	PNEUMATIC 2:1
Compressed air consumed	None	~1.2× output
Energy for 35 SCFM	2.6 kW	~8 kW at the compressor
Units for 35 SCFM continuous	1	2 to 4
Maximum outlet pressure	400 psig	230 to 300 psi
Wear parts	2 bearings	Seals, pistons, valves

APPROX. PAYBACK VS. PNEUMATIC*

~2 years

~\$2,350 energy saved per year

~\$1,100 maintenance saved per year

~\$3,450 total savings per year

* Example: 35 SCFM from 100 to 200 psig, 50% average demand, 24/7, \$0.10/kWh, compared with three 2:1 pneumatic boosters and one yearly seal kit per unit. Approximate estimate at typical end-user pricing; actual savings depend on your site.

TECHNICAL DATA

MODEL IDSC-2SHP-166-400

PRESSURE RATIO 2:1	MAX. PRESSURE 400 psig	MAX. FLOW 35 SCFM	SPEED 15,000 RPM
MOTOR POWER 2.6 kW (3.5 hp)	POWER SUPPLY 120/230 V, 1-phase 230 V, 3-phase	CONNECTION PORTS 1.25" MNPT	MEDIA Air, N₂, other gases
GAS PATH Oil-free, leak-tight	DUTY Continuous, 24/7	BEARING SERVICE 2.5 to 3 years	TECHNOLOGY Regenerative, 2-stage

Explosion-proof motors, other voltages and coatings available on request.

Let's size your booster.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com

PHONE +1 438-880-4655

WEB id-industries.com