




DOUBLE STAGE REGENERATIVE BLOWER DATASHEET

MODEL: IDSC0530-2SB152-5

- Maintenance free. Oil free compression.
- 50/60 Hz motors, insulation class F. IP55 protection rating.
- Explosion proof, CSA, ULc certified motor available.
- Frequency converter operation allowed.

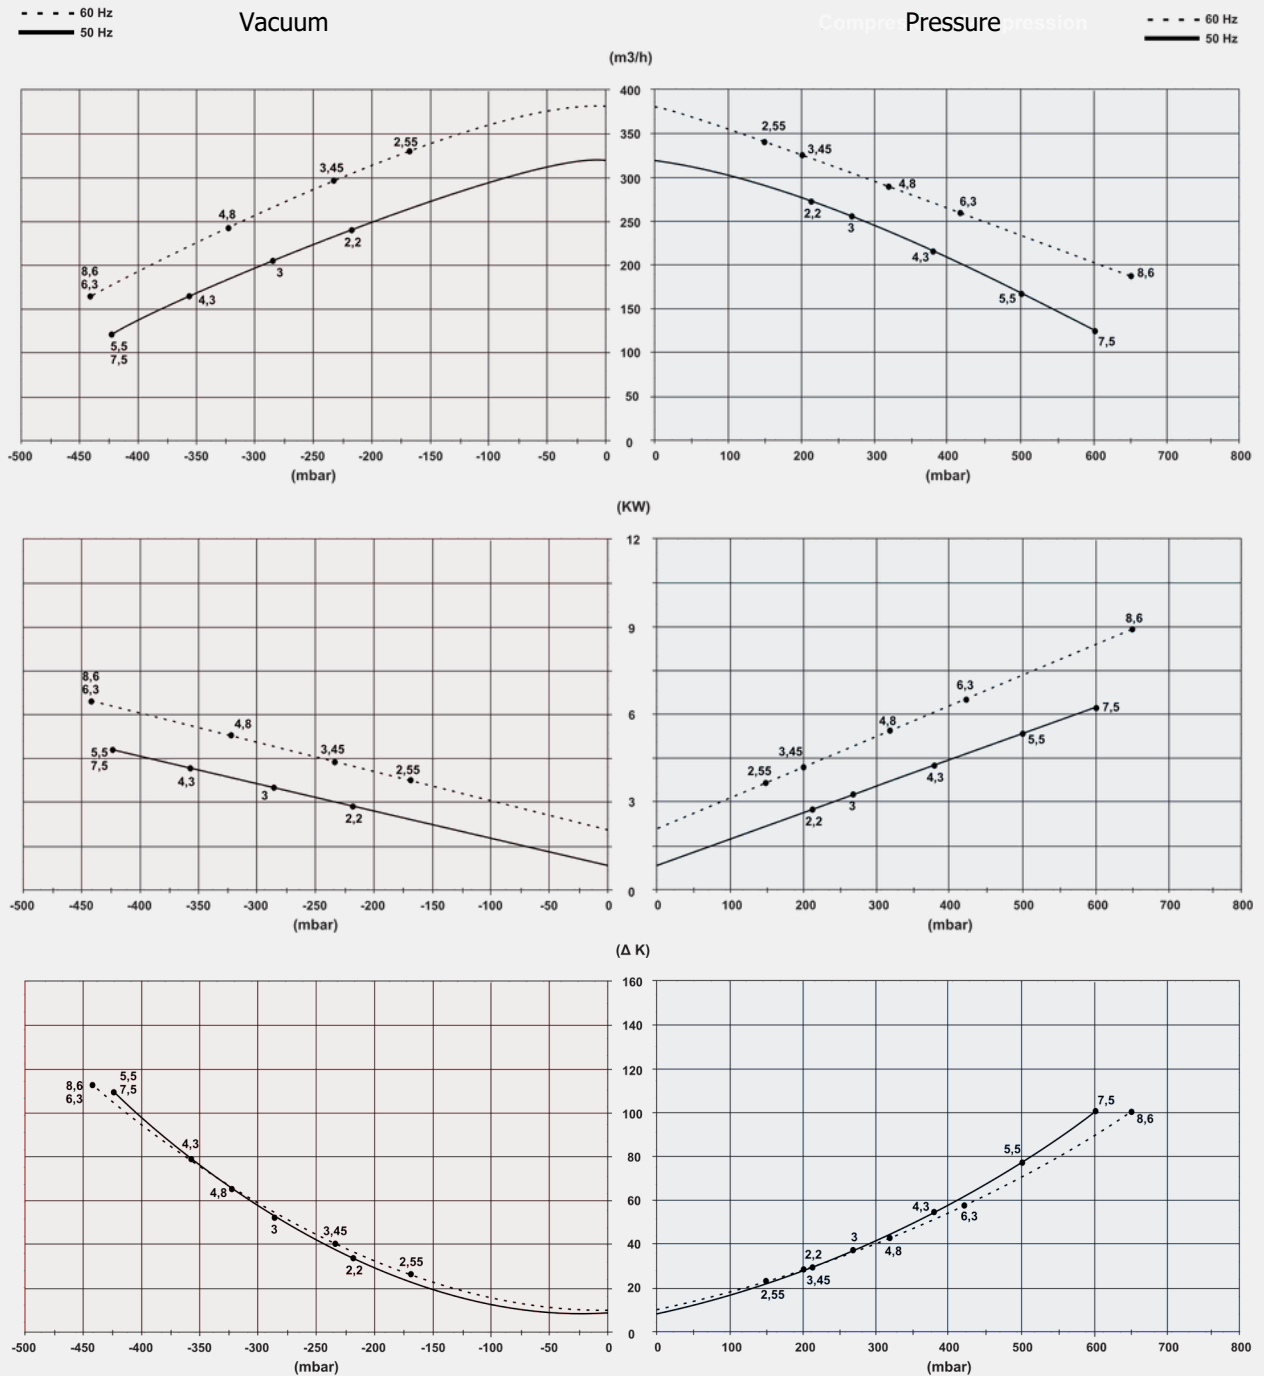

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

