

REGENERATIVE BLOWER BOOSTER · 2:1

The first **leak-tight** electric air booster.

Double your air pressure right where you need it.
No compressed air consumed. No oil.

Compressed air · Nitrogen · Other process gases



2:1

PRESSURE RATIO

400 psig

MAX. PRESSURE

35 SCFM

CONTINUOUS FLOW

15,000 RPM

HIGH-SPEED DESIGN

~50%

LESS ENERGY*

The problem with pneumatic boosters

In most plants, pressure losses along the network leave some machines short of pressure. The usual fix is an air-driven (pneumatic) booster. The catch: it **consumes compressed air to raise pressure**.


Every cubic foot it draws from the main line lowers line pressure even further for everything else on the network. The result is a vicious circle: more air demand, lower line pressure, a compressor working harder, and typically **about twice the energy** of an electric booster doing the same job.

Piston boosters avoid the drive air but bring rings, sleeves, a crankshaft, many bearings, friction, wear and a risk of oil in your air.


Our answer

Our booster is a high-speed **regenerative blower** driven by an **electric motor**, not by compressed air. It doubles the pressure of the air or gas it receives. Nothing is exhausted, nothing is borrowed from the network.

PNEUMATIC BOOSTER (TODAY)

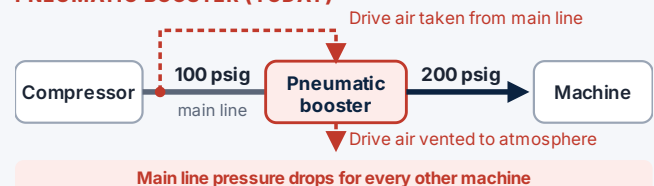

ID ELECTRIC BOOSTER

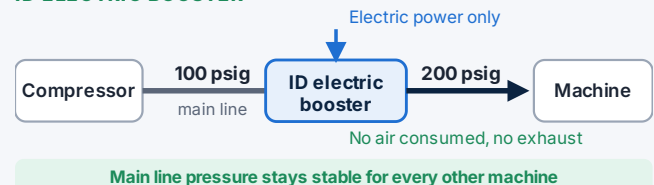

Radically simple by design

A two-stage regenerative blower: one electric motor, one shaft, two impellers, two bearings. That's the whole machine. Running at up to **15,000 RPM**, it is far more compact and lighter than a piston booster of similar capacity.

1

Electric motor

1

Shaft

2

Impellers

2

Bearings

INLET

100 psig



OUTLET

200 psig

INLET

200 psig



OUTLET

400 psig

Need more?

Install in series.

Why it wins

No compressed air used

About half the energy of a pneumatic booster.

Leak-tight

Nothing escapes. Ideal for nitrogen and other gases.

100% oil-free

No risk of oil in your air or product.

Almost no maintenance

No rubbing parts. Bearings every 2.5 to 3 years.

Compact and light

15,000 RPM design. Install it right at the machine.

Runs 24/7

Built for continuous duty.

How it compares

	ID ELECTRIC	PNEUMATIC	PISTON
Uses compressed air	No	Yes	No
Energy use	1×	≈ 2×	Moderate
Oil-free	Yes	Varies	Oil risk
Leak-tight	Yes	No	No
Maintenance	Minimal	Regular	Frequent
Size	Compact	Medium	Bulky

Technical data

MODEL IDSC-2SHP-166-400

PRESSURE RATIO
2:1

MAX. PRESSURE
400 psig

MAX. FLOW
35 SCFM

SPEED
15,000 RPM

MOTOR POWER
2.6 kW (3.5 hp)

POWER SUPPLY
**120/230 V, 1-phase
230 V, 3-phase**

CONNECTION PORTS
1.25" MNPT

MEDIA
Air, N₂, other gases

GAS PATH
Oil-free, leak-tight

DUTY
Continuous, 24/7

BEARING SERVICE
2.5 to 3 years

TECHNOLOGY
Regenerative, 2-stage

Explosion-proof motors, other voltages and coatings available on request.

Let's size your booster.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com

PHONE +1 438-880-4655

WEB id-industries.com