



NATURAL GAS BOOSTING


High-Pressure Natural Gas Booster

Staged · **Leak-Free** · Simple

Magnetically Coupled Side Channel Booster


OIL-FREE · STAINLESS STEEL CASING

STACKABLE IN SERIES · EX-RATED

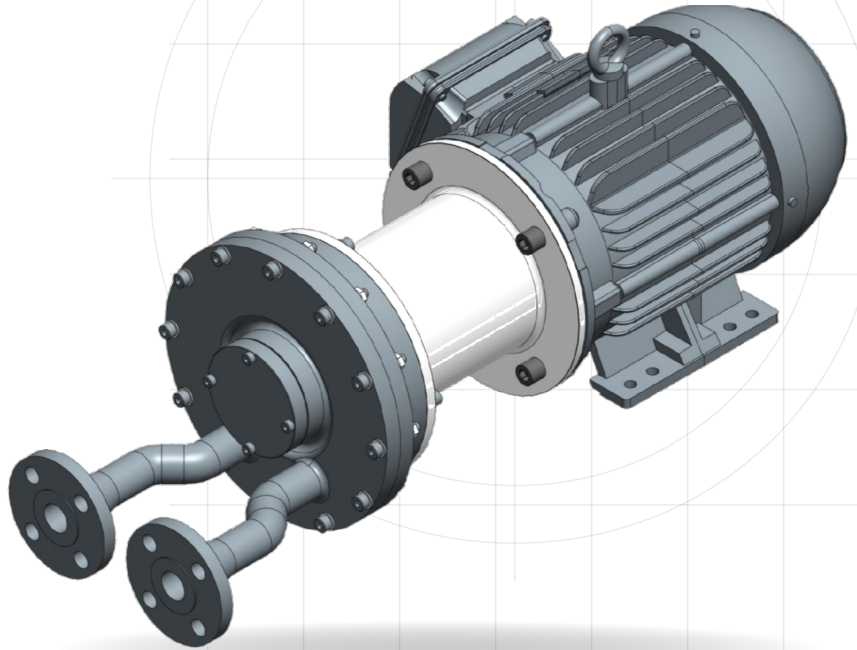

ENGINEERED · STACKABLE · RELIABLE

Built for High-Pressure Service

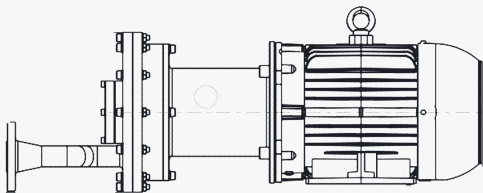

— Magnetic coupling

Zero shaft seal on the gas side — eliminates the leak path that limits conventional blowers at high inlet pressure.

— Single impeller · 2 bearings

No rotor/stator contact anywhere in the compression unit.

— Stackable in series

Identical units stage together to reach the discharge pressure the job needs.

Explosion-Proof Motor

Available rated for Class I Division 1/2, Class II Division 2, Groups C, D, F & G hazardous locations.

Continuous Duty

Designed for uninterrupted 24/7 operation in fuel gas boosting and turbine skid service.

Field-Proven Platform

Same core blower design already in service on natural gas dryer applications.



FEATURES · ADVANTAGES · BENEFITS

Why It's a **Simpler Boost**

FEATURE	ADVANTAGE	BENEFIT
Magnetic coupling	Removes the mechanical shaft seal entirely, even at high inlet pressure	Eliminates a leak point — less lost product, lower emissions liability, no seal replacement cost
Single impeller, 2-bearing design	No contact between rotor and stator — nothing to grind or wear	Fewer parts to replace and less unplanned downtime than a reciprocating or screw compressor
Multi-stage capable	Two or three units staged in series build pressure ratio progressively	Pay for the pressure you actually need — no oversized, overpriced single machine
Stainless steel casing	Resists corrosion from H ₂ S and sour gas service	Longer service life means fewer replacement cycles and lower lifecycle cost
100% oil-free chamber	No oil system, no lubrication in the gas path	Avoids costly downstream turbine damage from oil carryover, plus no oil handling or disposal cost
Explosion-proof motor options	Rated for Class I Division 1/2 hazardous locations	Installs straight into classified areas — no extra engineering cost or project delays
Compact footprint	Smaller than an equivalent reciprocating or screw compressor package	Saves skid space and fabrication cost — fits tight retrofits without civil work
Continuous duty rated	Built for 24/7 high-speed operation	Keeps fuel gas flowing so the turbine or process doesn't go down

Staged Pressure Boost

1 STAGE	600 → 700 psig	~100 psi differential
2 STAGES	600 → 810 psig	~210 psi cumulative
3 STAGES	600 → 935 psig	~335 psi cumulative

Every application is different — from a couple of PSI up to hundreds of PSI, we size the boost to fit your process.
Tell us your inlet pressure and target, and we'll tell you what's possible.