

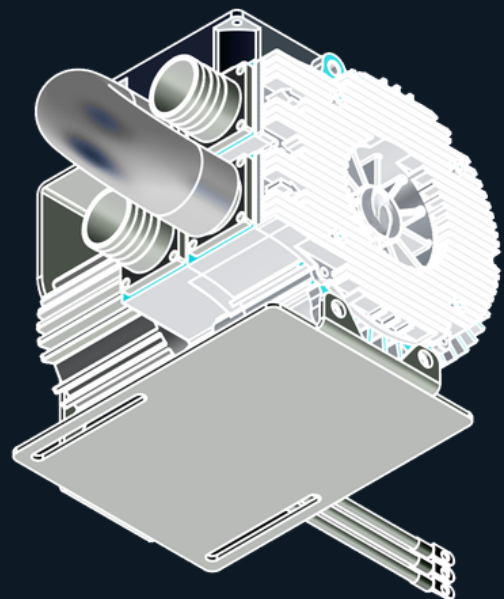


High speed Regenerative blower

Compact - Lightweight - Efficient

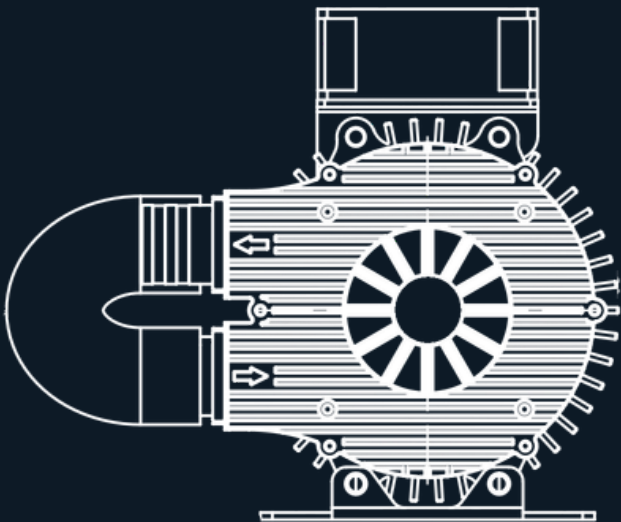


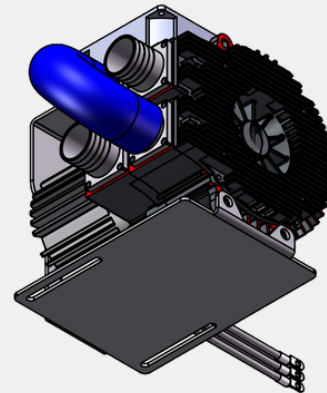


High speed Regenrative blower

IDMB0092-2SA281


Pressure vs flow- Vacuum

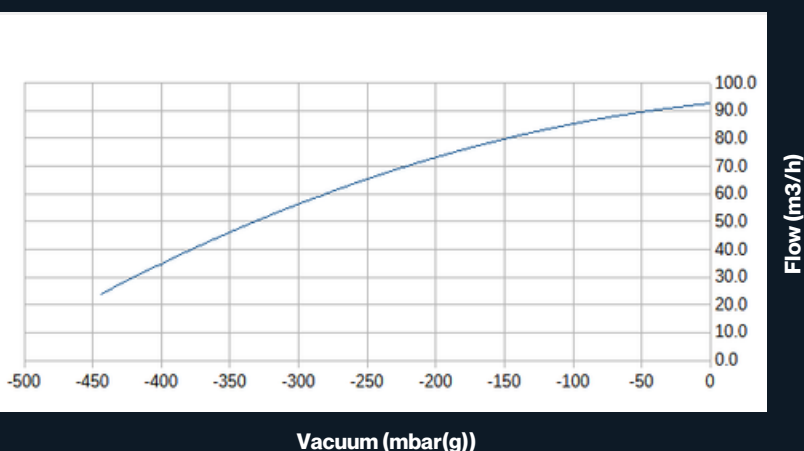


Pressure vs Flow - Compression

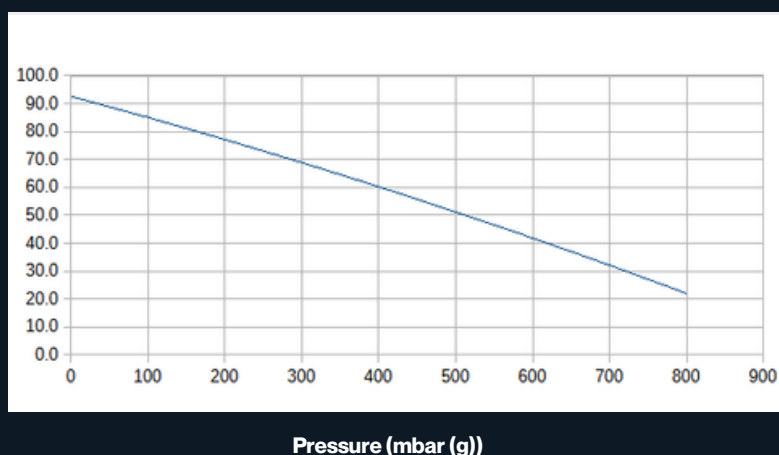

Pressure vs Power - Vacuum

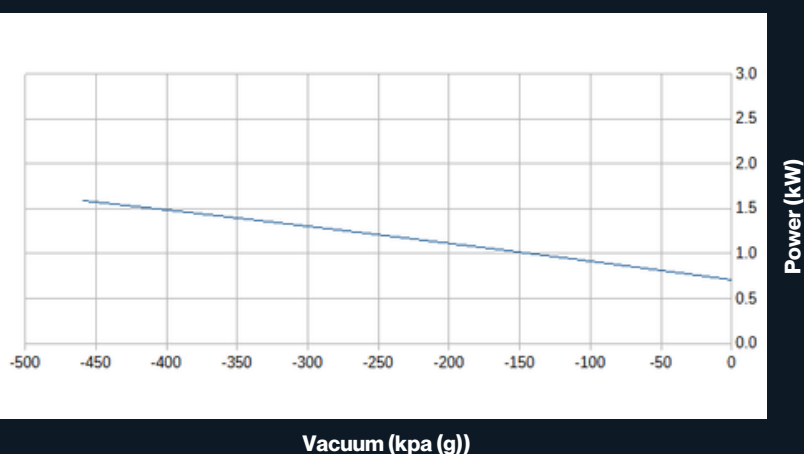

Pressure vs Power - Compression

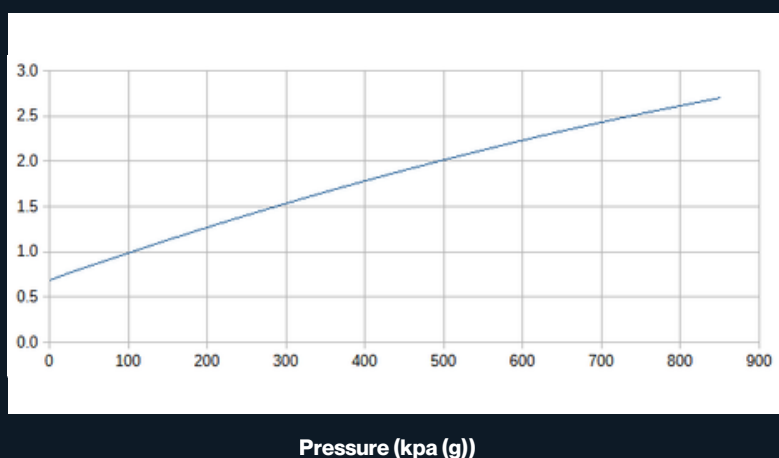

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of $\pm 10\%$. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

Every pump can be used both as vacuum pump and compressor in continuous operation over the total performance curve range.




**Innovation
Dynamics**

Noth America - Europe

IDMB0092-2SA281

Dimensions

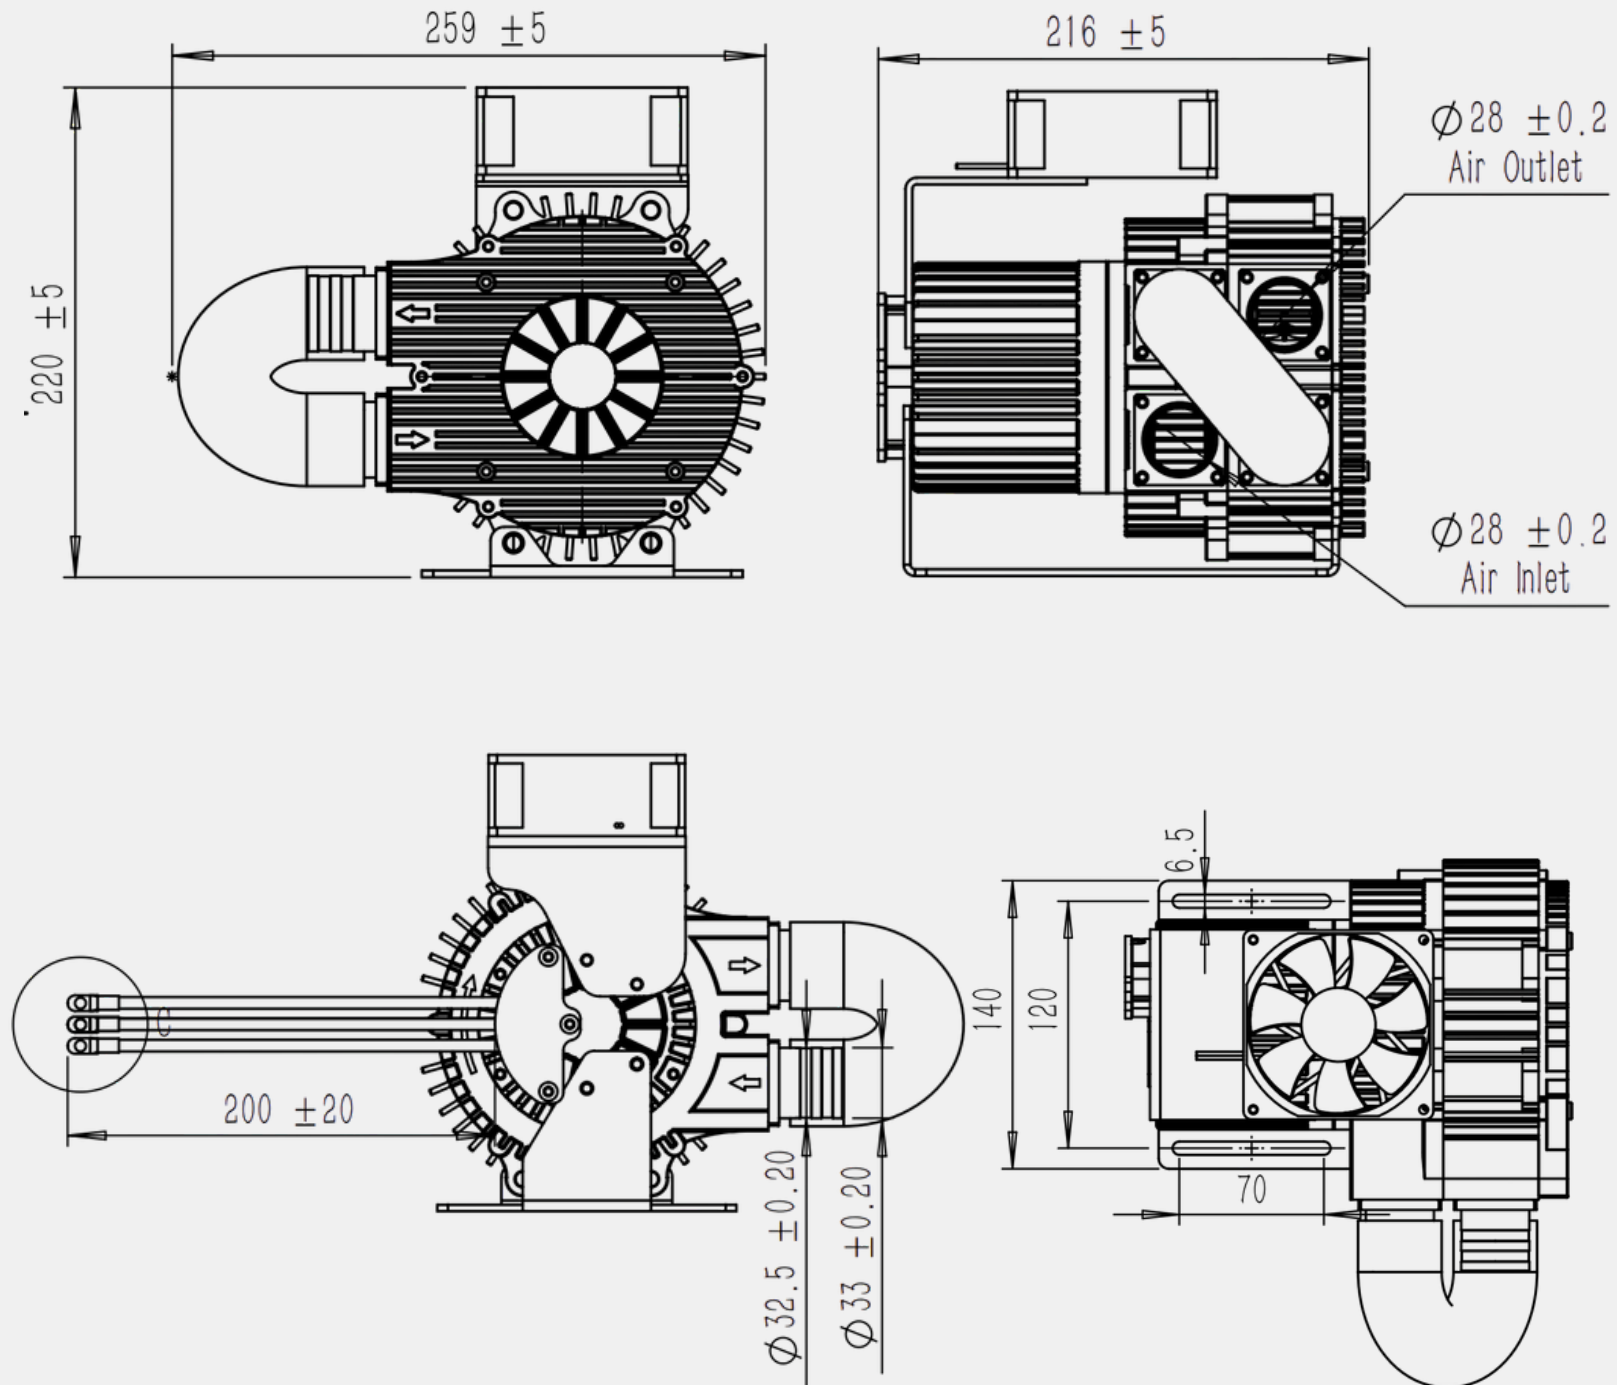



**Innovation
Dynamics**

Noth America - Europe

IDMB0092-2SA281

Data

Max Flow: 92 m³/h

Max vacuum: -435 mbar

Max pressure: 800 mbar

Motor power: 2.6 kW

Motor voltage: 48 VDC / 120-240 VAC

Motor type: High speed, 3 phases,
permanent magnet

Max speed: 15 k rpm

weight: 6.8 kg

Sound level: 60-70 dB

