




- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

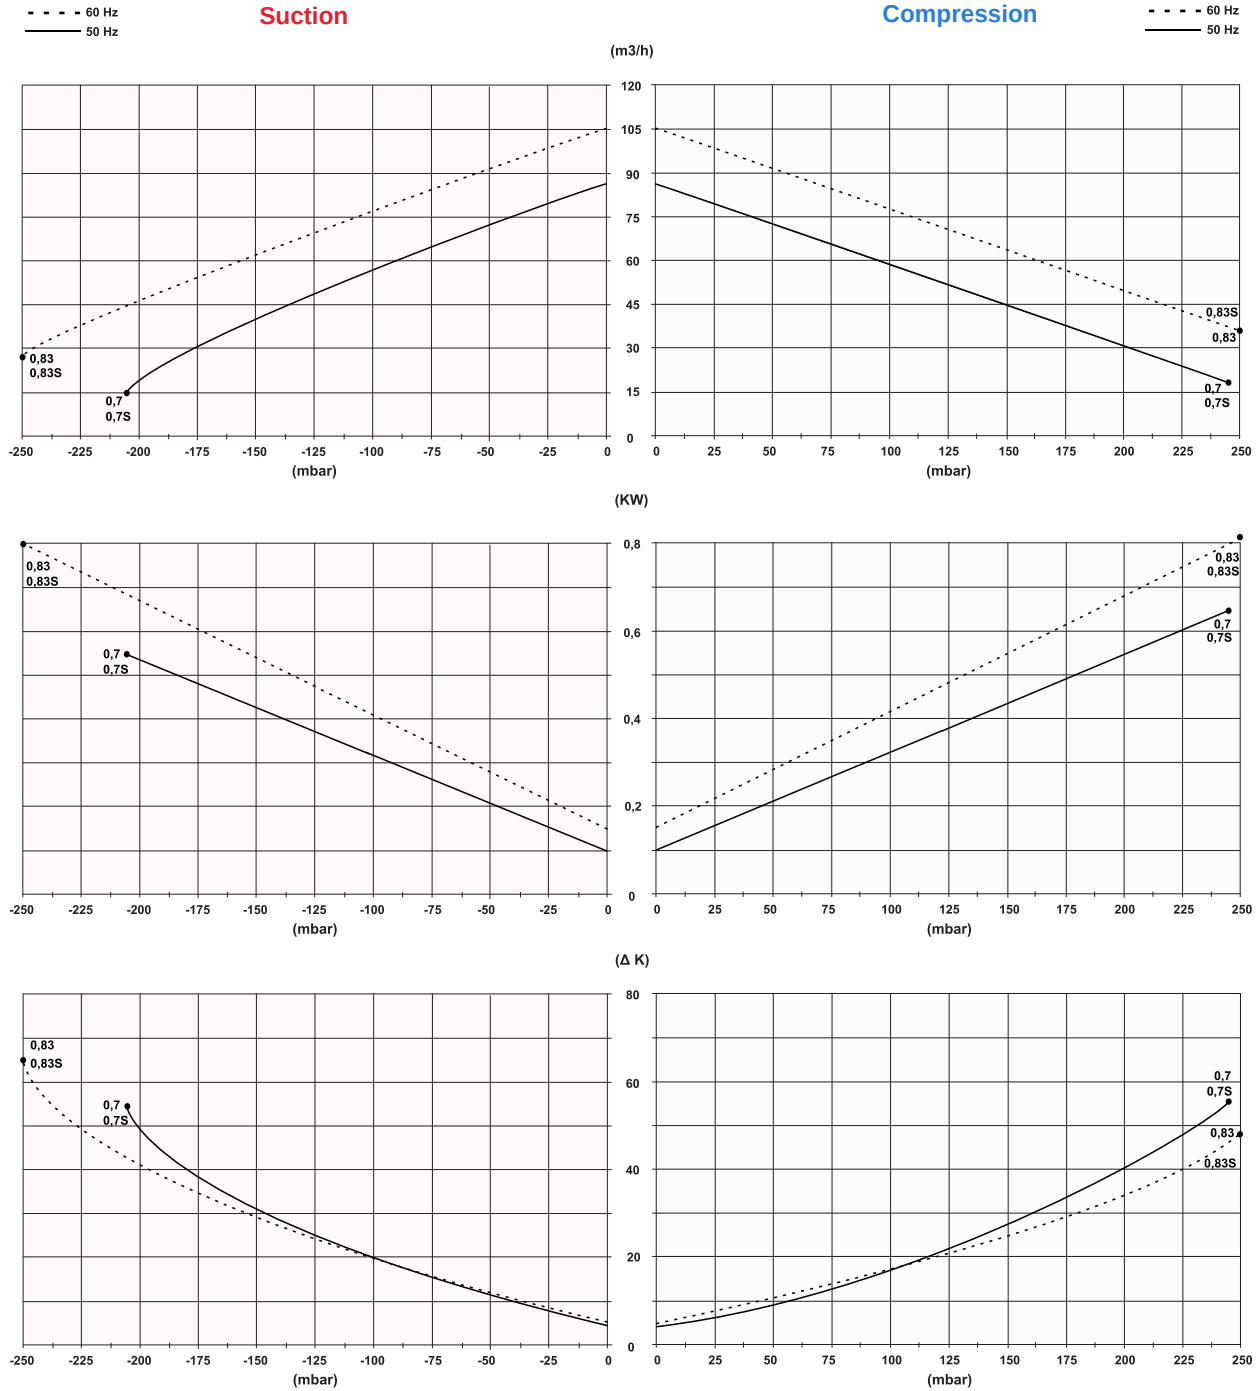

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

## Technical data

| Type              | kW   | Hz | V <sup>1)</sup>       | A               | m <sup>3</sup> /h | hPa (mbar) <sup>2)</sup> | dB(A) <sup>3)</sup> | kg |
|-------------------|------|----|-----------------------|-----------------|-------------------|--------------------------|---------------------|----|
| STRC0080-2SA700-1 | 0,7  | 50 | 230                   | 4,5             | 85                | -210 / 240               | 55                  | 15 |
|                   | 0,83 | 60 | 230                   | 5,6             | 105               | -250 / 250               | 61                  |    |
| STRC0080-2ST700-6 | 0,7  | 50 | 200-240 Δ / 345-415 Y | 3,8 Δ / 2,2 Y   | 85                | -210 / 240               | 55                  | 15 |
|                   | 0,83 | 60 | 220-275 Δ / 380-480 Y | 3,75 Δ / 2,15 Y | 105               | -250 / 250               | 61                  |    |

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°... 40°C


Inlet temperature: -25°... 40°C

Max. installation height: 1000 m

Bimetal motor protection

| Type              | Hz | V                     |
|-------------------|----|-----------------------|
| STRC .....T....-1 | 50 | 185-225 Δ / 320-390 Y |
|                   | 60 | 200-240 Δ / 345-415 Y |
| STRC .....T....-5 | 50 | 500 Δ                 |
|                   | 60 | 575 Δ                 |
| STRC .....T....-6 | 50 | 200-240 Δ / 345-415 Y |
|                   | 60 | 220-275 Δ / 380-480 Y |
| STRC .....T....-7 | 50 | 345-415 Δ / 600-720 Y |
|                   | 60 | 380-480 Δ / 660-720 Y |
| STRC .....A....-1 | 50 | 230                   |
|                   | 60 | 230                   |
| STRC .....S....-5 | 50 | 115/230               |
|                   | 60 | 115/230               |

## Dimensions

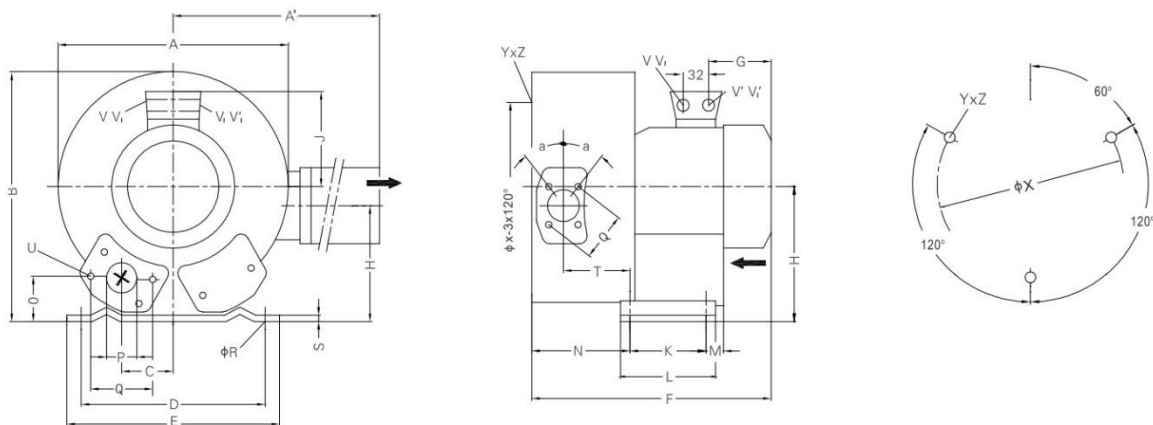

| Type              | A   | A'  | B   | C  | D   | E   | F   | G   | H   | H'  | J   | K  | L   | M  | N   | O  | P        | Q  | φR | S   | T  | U       | V         | V'        | φX  | Y_Z     | X-Holes       |
|-------------------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|----|-----|----|-----|----|----------|----|----|-----|----|---------|-----------|-----------|-----|---------|---------------|
| STRC0080-2SA700-1 | 284 | 316 | 270 | 45 | 205 | 230 | 316 | 135 | 128 | 106 | 111 | 83 | 108 | 75 | 130 | 39 | G 1 1/4" | 64 | 10 | 2,5 | 88 | M6 x 17 | M25 x 1,5 | M16 x 1,5 | 140 | M6 x 15 | 51°/171°/291° |
| STRC0080-2ST700-6 | 284 | 316 | 270 | 45 | 205 | 230 | 316 | 135 | 128 | 106 | 111 | 83 | 108 | 75 | 130 | 39 | G 1 1/4" | 64 | 10 | 2,5 | 88 | M6 x 17 | M25 x 1,5 | M16 x 1,5 | 140 | M6 x 15 | 51°/171°/291° |