REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.



Vacuum or pressure · Continuous duty

105 m³/h	3.6 psi	−3.6 psi	0.83 kW	61 dB(A)	15 kg
62 CFM	0.25 bar	−0.25 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz


CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, series	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

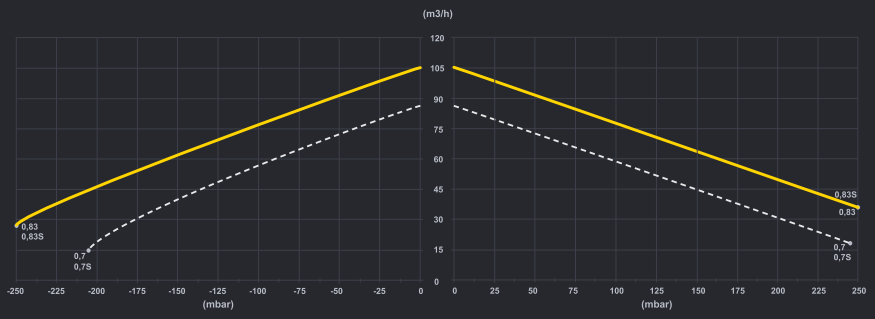

POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

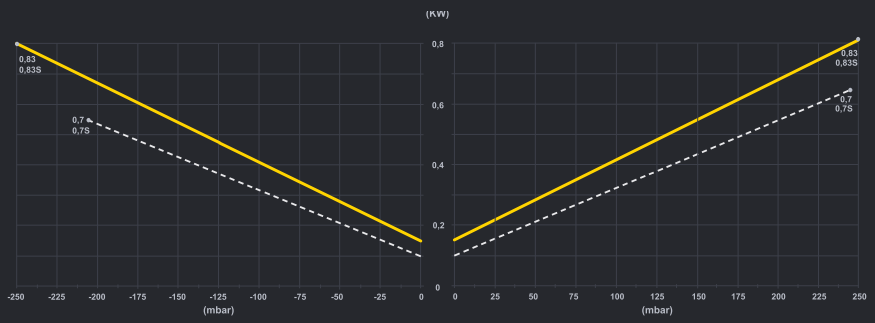

TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

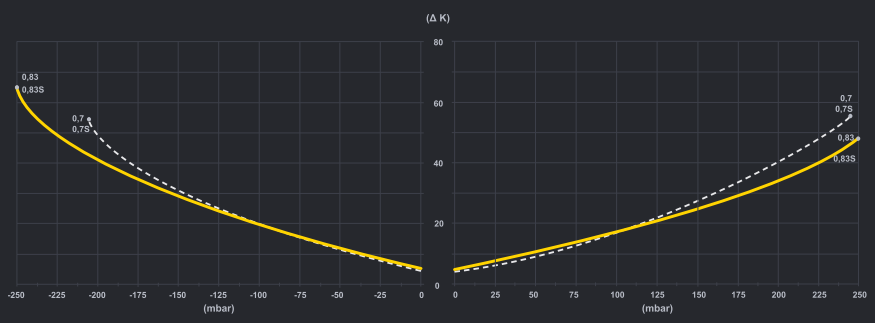

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0080-2SA700-1	0.83	230	5.6	105 m³/h 62 CFM	−3.6 psi −0.25 bar	3.6 psi 0.25 bar	61	15
STRC0080-2ST700-6	0.83	220-275 Δ / 380-480 Y	3.75 Δ / 2.15 Y	105 m³/h 62 CFM	−3.6 psi −0.25 bar	3.6 psi 0.25 bar	61	15


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


MOTOR CODES · AVAILABLE VOLTAGES


CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

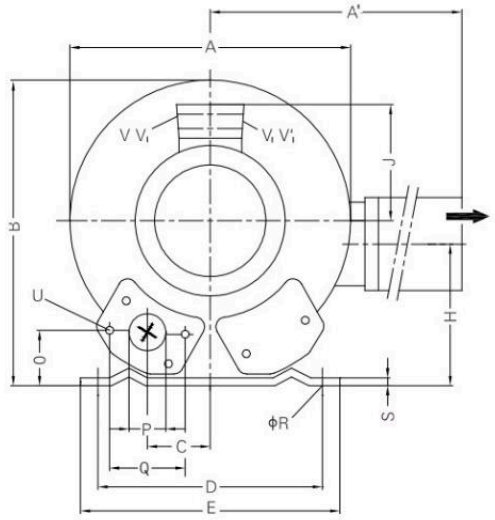

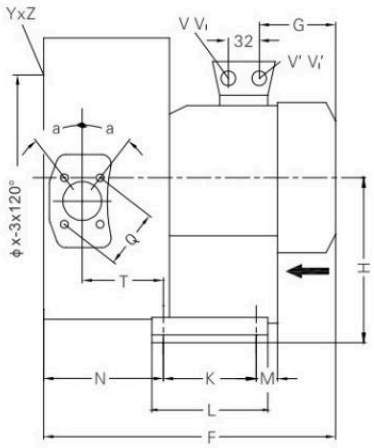



Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes
STRC0080-2SA700-1	284	316	270	45	205	230	316	135	128	106	111	83	108	75	130	39	G 1 1/4"	64	10	2.5	88	M6 × 17	M25 × 1.5	M16 × 1.5	140	M6 × 15	51°/171°/291°
STRC0080-2ST700-6	284	316	270	45	205	230	316	135	128	106	111	83	108	75	130	39	G 1 1/4"	64	10	2.5	88	M6 × 17	M25 × 1.5	M16 × 1.5	140	M6 × 15	51°/171°/291°

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com