REGENERATIVE BLOWER · 2 STAGES IN SERIES

# Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.



Vacuum or pressure · Continuous duty

| 180 m³/h | 6.1 psi | −5.1 psi | 1.75–20.5 kW | 69 dB(A) | 25–27 kg |
|---|---|---|---|---|---|
| 106 CFM | 0.42 bar | −0.35 bar | | | |
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz

| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| 2 stages, series | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |


## PERFORMANCE CURVES

### FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

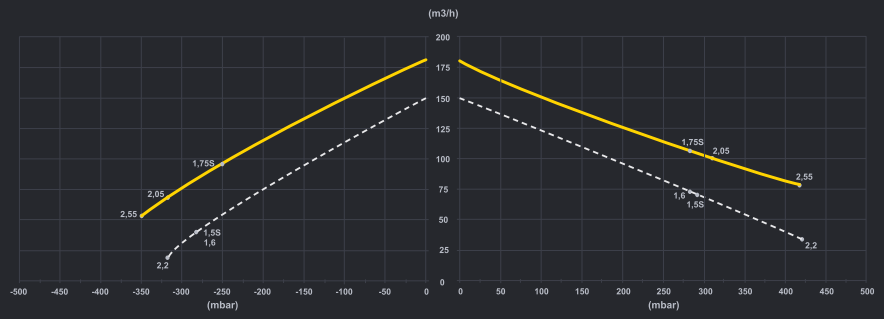



### POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

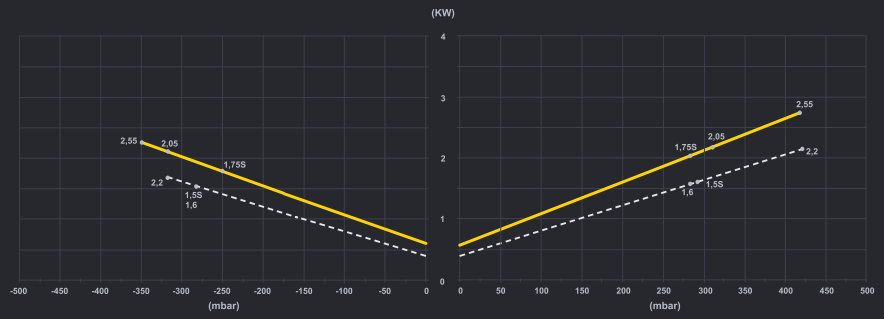



### TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

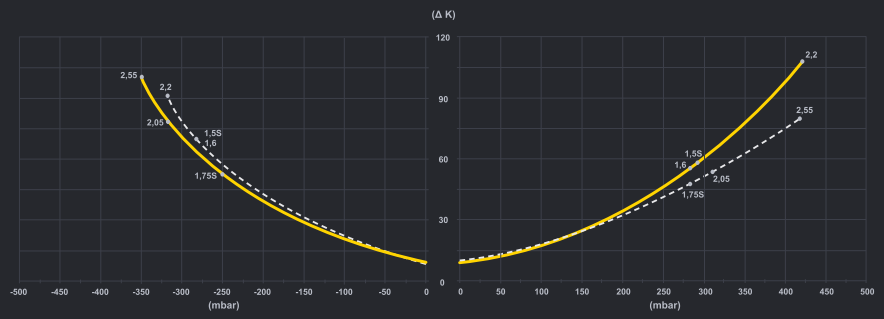


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

## MODELS · 60 Hz

| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRC0140-2SA151-1** | 1.75 | 230 | 10 | 180 m³/h<br>106 CFM | −3.6 psi<br>−0.25 bar | 4.1 psi<br>0.28 bar | 69 | 26 |
| **STRC0140-2ST161-6** | 20.5 | 220-275 Δ / 380-480 Y | 7.6 Δ / 4.4 Y | 180 m³/h<br>106 CFM | −4.6 psi<br>−0.32 bar | 4.5 psi<br>0.31 bar | 69 | 25 |
| **STRC0140-2ST221-6** | 2.55 | 220-275 Δ / 380-480 Y | 10.3 Δ / 6.0 Y | 180 m³/h<br>106 CFM | −5.1 psi<br>−0.35 bar | 6.1 psi<br>0.42 bar | 69 | 27 |


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


MOTOR CODES · AVAILABLE VOLTAGES


| CODE | 50 HZ (V) | 60 HZ (V) |
|---|---|---|
| **STRC ....-..T...-1** | 185-225 Δ / 320-390 Y | 200-240 Δ / 345-415 Y |
| **STRC ....-..T...-5** | 500 Δ | 575 Δ |
| **STRC ....-..T...-6** | 200-240 Δ / 345-415 Y | 220-275 Δ / 380-480 Y |
| **STRC ....-..T...-7** | 345-415 Δ / 600-720 Y | 380-480 Δ / 660-720 Y |
| **STRC ....-..A...-1** | 230 | 230 |
| **STRC ....-..S...-5** | 115/230 | 115/230 |

## DIMENSIONS

All dimensions in mm

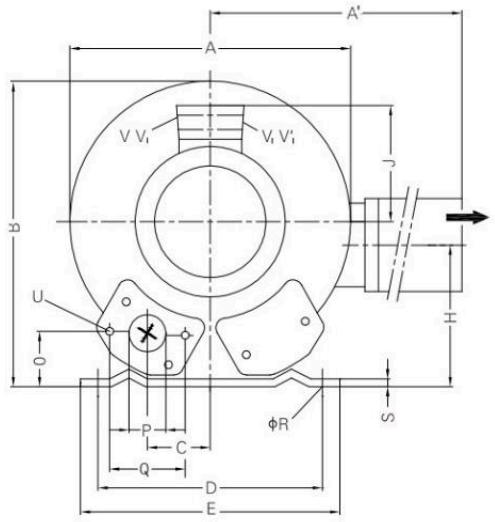

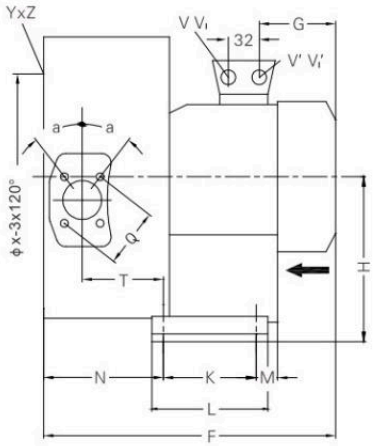
| Type | A | A' | B | C | D | E | F | G | H | H' | J | K | L | M | N | O | P | Q | ϕR | S | T | U | V | V' | ϕX | Y_Z | X-Holes |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **STRC0140-2SA151-1** | 322 | 324 | 315 | 58 | 225 | 255 | 401 | 191 | 154 | 153 | 128 | 95 | 130 | 73 | 151 | 45 | G 1 1/2" | 72 | 12 | 3 | 104 | M6 × 19 | M25 × 1.5 | M16 × 1.5 | 174 | M6 × 19 | 51°/171°/291° |
| **STRC0140-2ST161-6** | 322 | 324 | 315 | 58 | 225 | 255 | 401 | 191 | 154 | 153 | 128 | 95 | 130 | 73 | 151 | 45 | G 1 1/2" | 72 | 12 | 3 | 104 | M6 × 19 | M25 × 1.5 | M16 × 1.5 | 174 | M6 × 15 | 51°/171°/291° |
| **STRC0140-2ST221-6** | 322 | 324 | 315 | 58 | 225 | 255 | 401 | 191 | 154 | 153 | 128 | 95 | 130 | 73 | 151 | 45 | G 1 1/2" | 72 | 12 | 3 | 104 | M6 × 19 | M16 × 1.5 | M25 × 1.5 | 174 | M6 × 15 | 51°/171°/291° |

**Let's size your blower.**
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com