REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

250 m³/h	4.2 psi	−3.8 psi	0.95–2.55 kW	70 dB(A)	20–25 kg
147 CFM	0.29 bar	−0.26 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz


CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

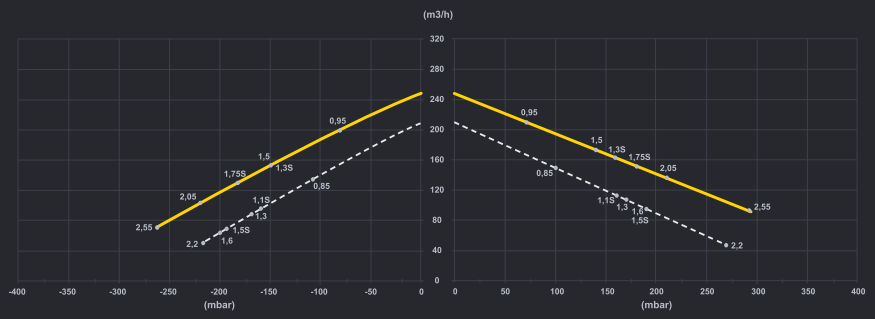

POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

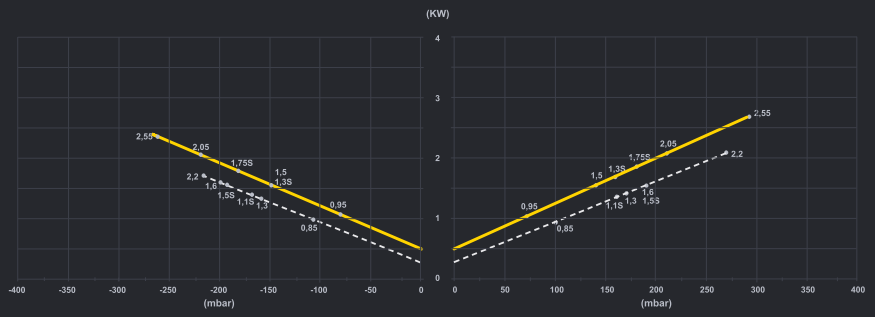

TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

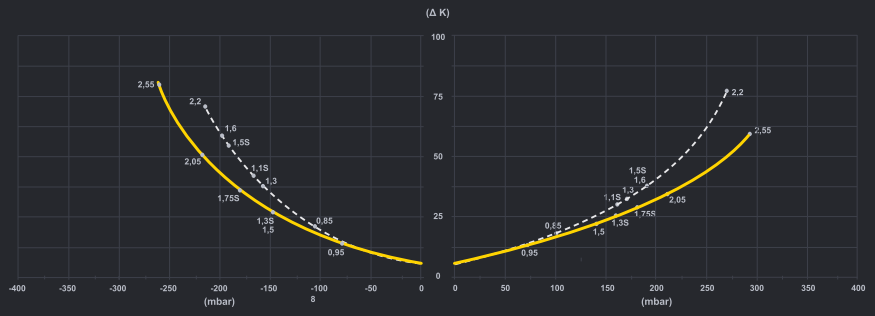

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0210-1MT850-6	0.95	220-275 Δ / 380-480 Y	4.0 Δ / 2.3 Y	250 m³/h 147 CFM	−1.2 psi −0.08 bar	1.0 psi 0.07 bar	70	20
STRC0210-1MA111-1	1.3	230	8.3	250 m³/h 147 CFM	−2.2 psi −0.15 bar	2.3 psi 0.16 bar	70	21
STRC0210-1MT131-6	1.5	220-275 Δ / 380-480 Y	5.7 Δ / 3.3 Y	250 m³/h 147 CFM	−2.2 psi −0.15 bar	2.0 psi 0.14 bar	70	22
STRC0210-1MA151-1	1.75	230	10	250 m³/h 147 CFM	−2.6 psi −0.18 bar	2.6 psi 0.18 bar	70	24
STRC0210-1MT161-6	2.05	220-275 Δ / 380-480 Y	7.6 Δ / 4.4 Y	250 m³/h 147 CFM	−3.2 psi −0.22 bar	3.0 psi 0.21 bar	70	23
STRC0210-1MT221-6	2.55	220-275 Δ / 380-480 Y	9.0 Δ / 5.3 Y	250 m³/h 147 CFM	−3.8 psi −0.26 bar	4.2 psi 0.29 bar	70	25


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

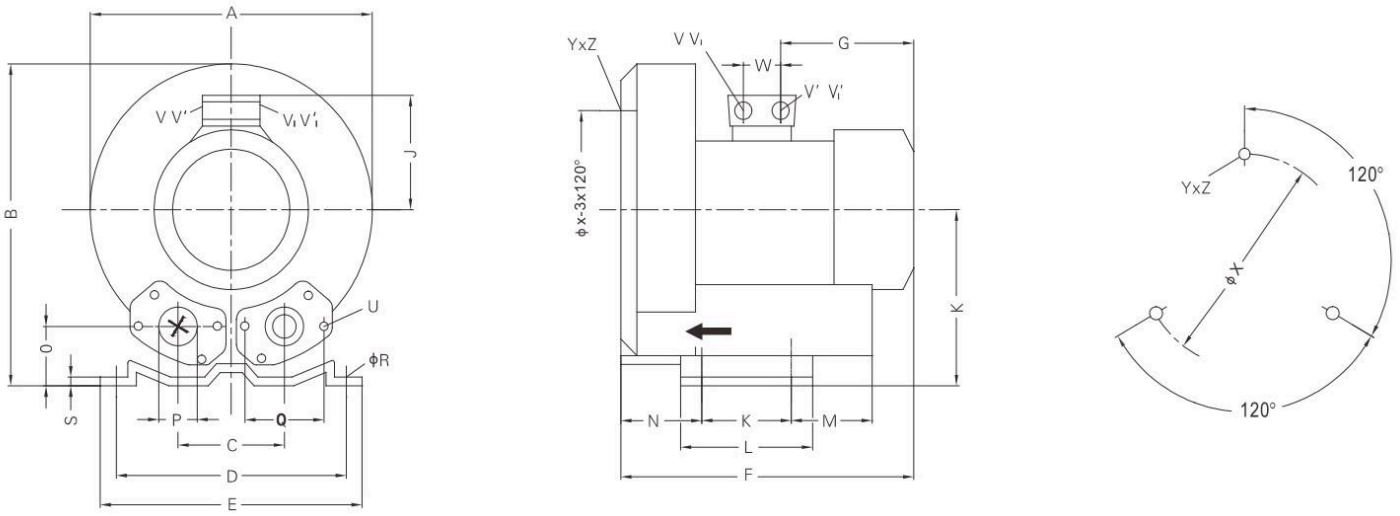

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX	W
STRC0210-1MT850-6	334	337	120	260	295	314	156	175	120	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MA111-1	334	337	120	260	295	314	156	175	120	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MT131-6	334	337	120	260	295	314	156	175	120	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MA151-1	334	337	120	260	295	345	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MT161-6	334	337	120	260	295	346	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MT221-6	334	337	120	260	295	346	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com