REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.



Vacuum or pressure · Continuous duty

375 m³/h	9.4 psi	−6.4 psi	2.55–8.6 kW	76 dB(A)	43–73 kg
221 CFM	0.65 bar	−0.44 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz


CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, series	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

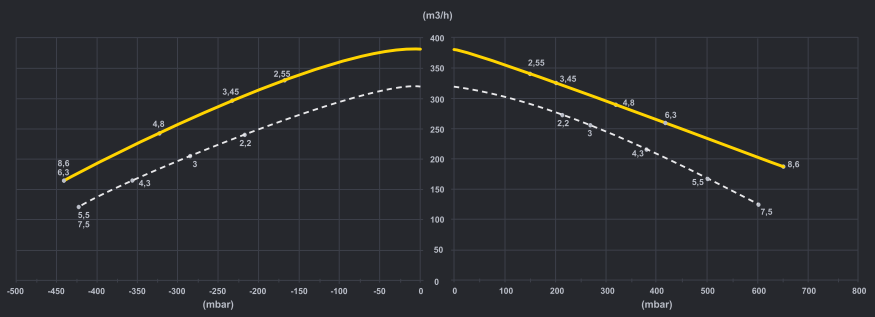

POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

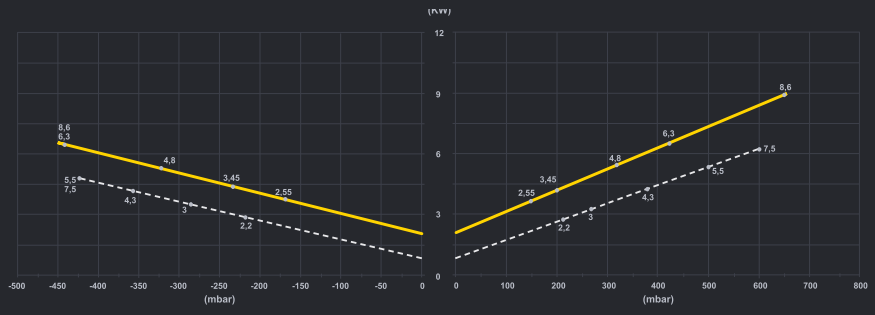

TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

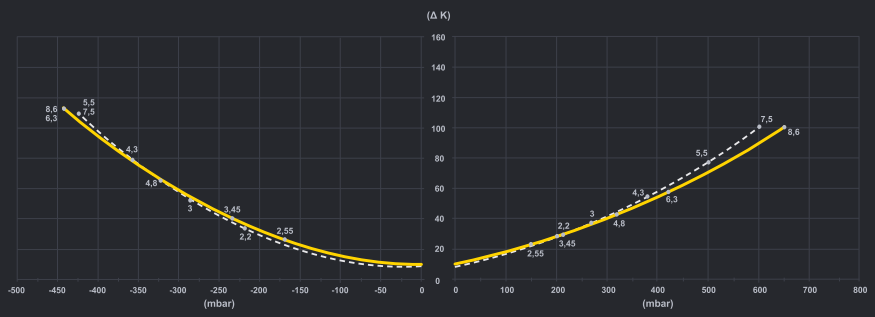

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0315-2ST221-6	2.55	220-275 Δ / 380-480 Y	10.3 Δ / 6.0 Y	375 m³/h 221 CFM	−2.5 psi −0.17 bar	2.2 psi 0.15 bar	76	43
STRC0315-2ST301-6	3.45	220-275 Δ / 380-480 Y	12.6 Δ / 7.3 Y	375 m³/h 221 CFM	−3.3 psi −0.23 bar	2.9 psi 0.20 bar	76	48
STRC0315-2ST431-7	4.8	380-480 Δ / 660-720 Y	10.4 Δ / 6.0 Y	375 m³/h 221 CFM	−4.6 psi −0.32 bar	4.8 psi 0.33 bar	76	54
STRC0315-2ST551-7	6.3	380-480 Δ / 660-720 Y	13.3 Δ / 7.7 Y	375 m³/h 221 CFM	−6.4 psi −0.44 bar	5.9 psi 0.41 bar	76	66
STRC0315-2ST751-7	8.6	380-480 Δ / 660-720 Y	17.3 Δ / 10.0 Y	375 m³/h 221 CFM	−6.4 psi −0.44 bar	9.4 psi 0.65 bar	76	73


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

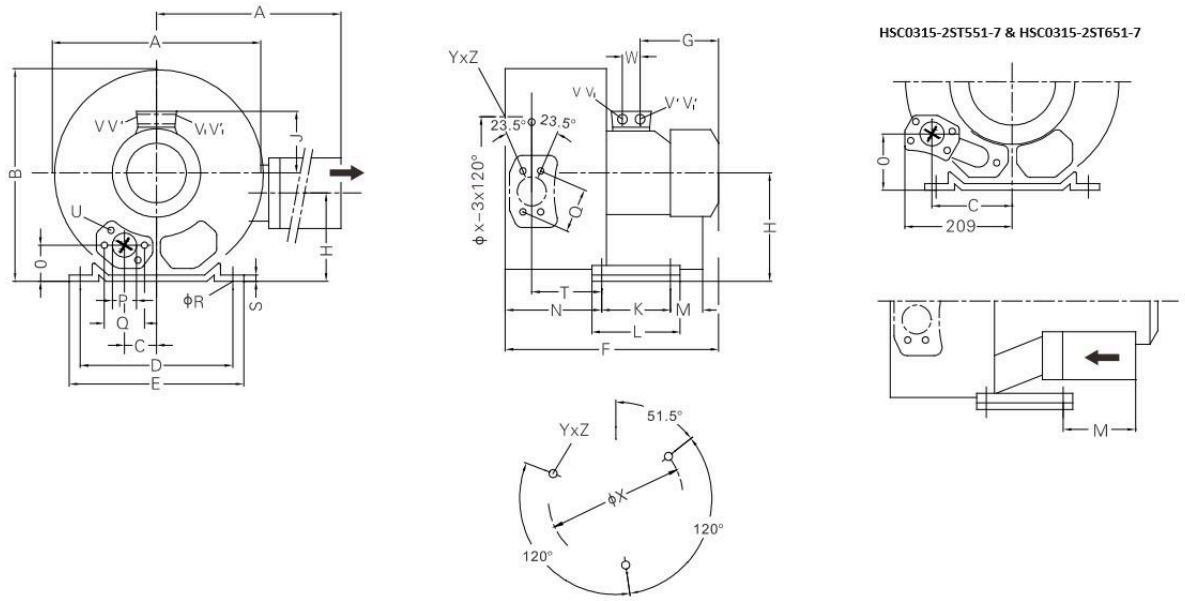

Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes	W
STRC0315-2ST221-6	426	426	420	63	290	325	473	185	197	162	128	140	180	84	205	53	G 2"	83	15	4.5	130	M8 × 17	M25 × 1.5	M16 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	29
STRC0315-2ST301-6	426	426	420	63	290	325	507	180	197	162	135	140	180	84	205	53	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42
STRC0315-2ST431-7	426	426	420	63	290	325	526	209	197	162	148	140	180	84	205	53	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42
STRC0315-2ST551-7	426	426	420	154	290	325	571	226	197	162	167	140	180	225	205	94	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42
STRC0315-2ST751-7	426	426	420	154	290	325	571	226	197	162	167	140	180	225	205	94	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com