REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.



Vacuum or pressure · Continuous duty

1 250 m³/h	7.8 psi	−6.5 psi	14.5–29 kW	87 dB(A)	187–211 kg
736 CFM	0.54 bar	−0.45 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, series	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

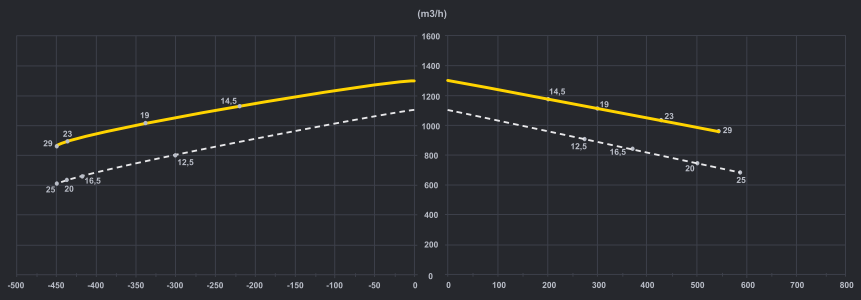


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

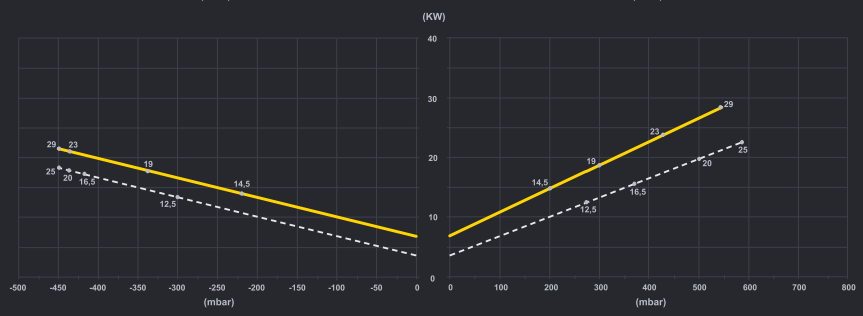


TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

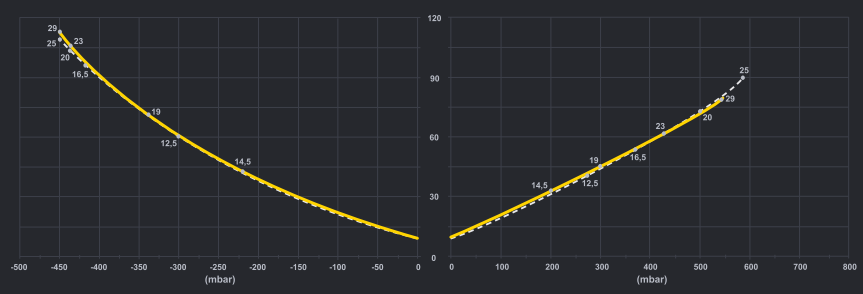

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC1050-2ST122-7	14.5	380-480 Δ / 660-720 Y	29.0 Δ / 16.7 Y	1 250 m³/h 736 CFM	−3.2 psi −0.22 bar	2.9 psi 0.20 bar	87	187
STRC1050-2ST165-7	19	380-480 Δ / 660-720 Y	36.5 Δ / 21.0 Y	1 250 m³/h 736 CFM	−4.9 psi −0.34 bar	4.4 psi 0.30 bar	84	197
STRC1050-2ST202-7	23	380-480 Δ / 660-720 Y	42.0 Δ / 24.2 Y	1 250 m³/h 736 CFM	−6.4 psi −0.44 bar	6.2 psi 0.43 bar	84	204
STRC1050-2ST252-7	29	380-480 Δ / 660-720 Y	52.0 Δ / 30.0 Y	1 250 m³/h 736 CFM	−6.5 psi −0.45 bar	7.8 psi 0.54 bar	84	211


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

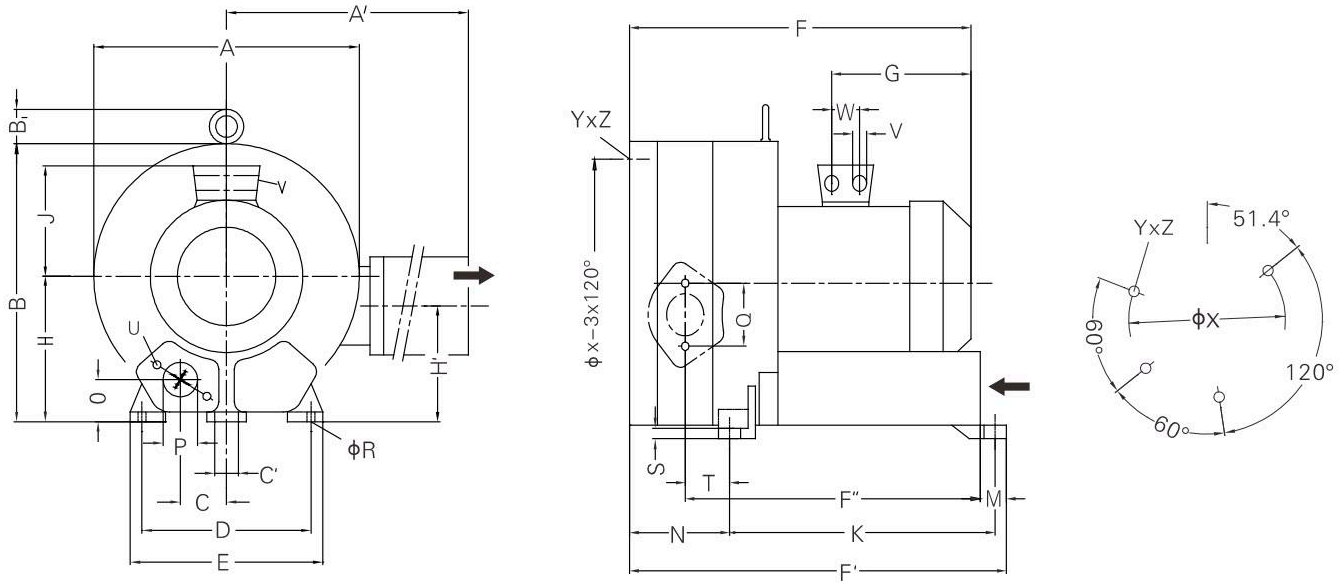

Type	A	A'	B	B'	C	C'	D	E	F	F'	F"	G	H	H'	J	K	M	N	O	ϕP	Q	ϕR	S	T	U	V	W	ϕX	Y_Z	X-Holes
STRC1050-2ST122-7	615	780	607	55	103.5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°
STRC1050-2ST165-7	615	780	607	55	103.5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°
STRC1050-2ST202-7	615	780	607	55	103.5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°
STRC1050-2ST252-7	615	780	607	55	103.5	15	360	415	812	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com