REGENERATIVE BLOWER · 2 STAGES IN PARALLEL

Double-flow regenerative blower.

Two impellers in parallel for twice the flow. Oil-free, direct-driven.

Vacuum or pressure · Continuous duty



2 480 m³/h	3.3 psi	−3.9 psi	17.5–29 kW	84 dB(A)	220–235 kg
1 460 CFM	0.23 bar	−0.27 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, parallel	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

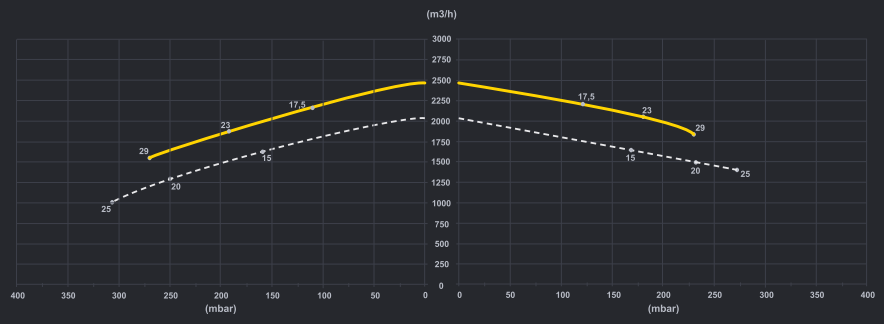


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

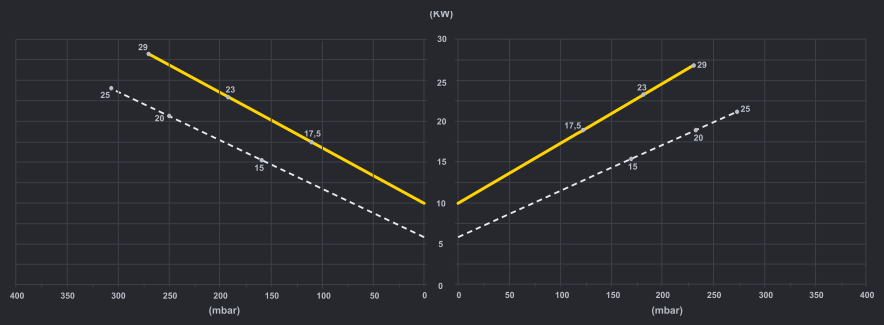


TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

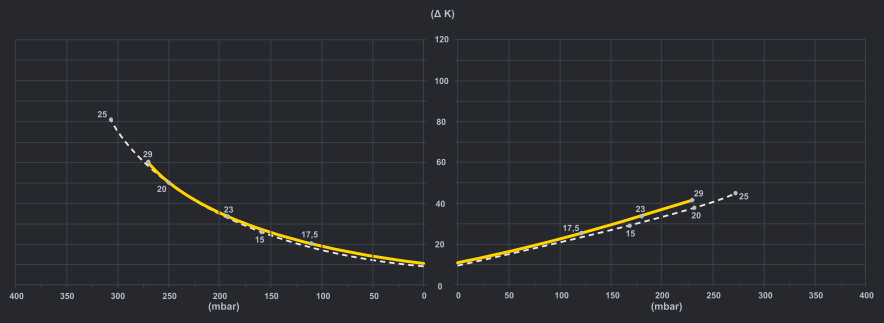

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC2050-2PT152-7	17.5	380-480 Δ / 660-720 Y	36.5 Δ / 21.0 Y	2 480 m³/h 1 460 CFM	−1.6 psi −0.11 bar	1.7 psi 0.12 bar	84	220
STRC2050-2PT202-7	23	380-480 Δ / 660-720 Y	42.0 Δ / 24.2 Y	2 480 m³/h 1 460 CFM	−2.8 psi −0.19 bar	2.6 psi 0.18 bar	84	230
STRC2050-2PT252-7	29	380-480 Δ / 660-720 Y	52.0 Δ / 30.0 Y	2 480 m³/h 1 460 CFM	−3.9 psi −0.27 bar	3.3 psi 0.23 bar	84	235


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

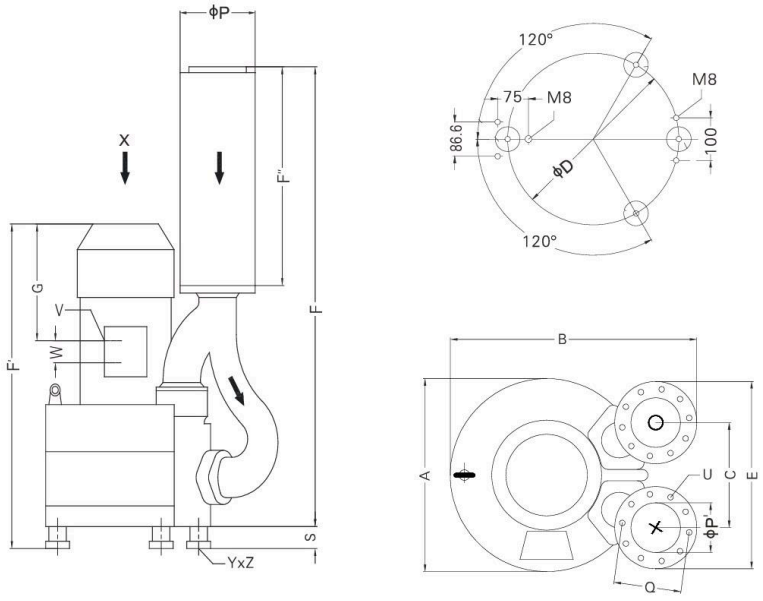

Type	A	B	C	D	E	F	F'	F''	G	P	P'	Q	S	U	V	W	Y_Z
STRC2050-2PT152-7	615	723	307	490	526	1201	848	578	291	219	135	201	58	M8 × 40	4 x M40 × 1.5	54	M12 × 10.5
STRC2050-2PT202-7	615	723	307	490	526	1201	848	578	291	219	135	201	58	M8 × 40	4 x M40 × 1.5	54	M12 × 10.5
STRC2050-2PT252-7	615	723	307	490	526	1201	908	578	351	219	135	201	58	M8 × 40	4 x M40 × 1.5	54	M12 × 10.5

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com