HIGH-PERFORMANCE BLOWER · 2 STAGES IN SERIES

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



60 m³/h	10.7 psi	−7.3 psi	0.94–1.75 kW	62 dB(A)	24–30 kg
35 CFM	0.74 bar	−0.50 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, series	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

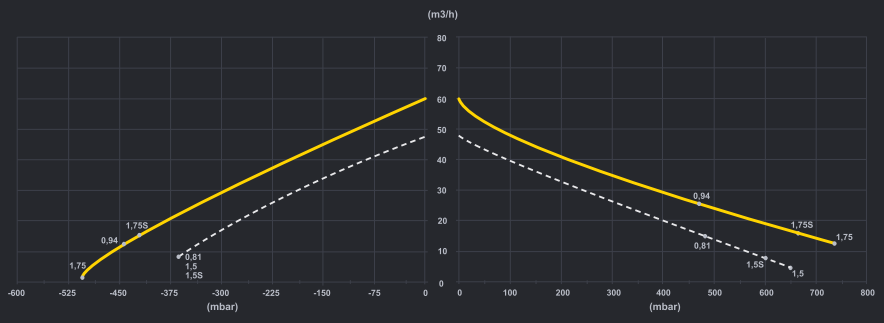


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

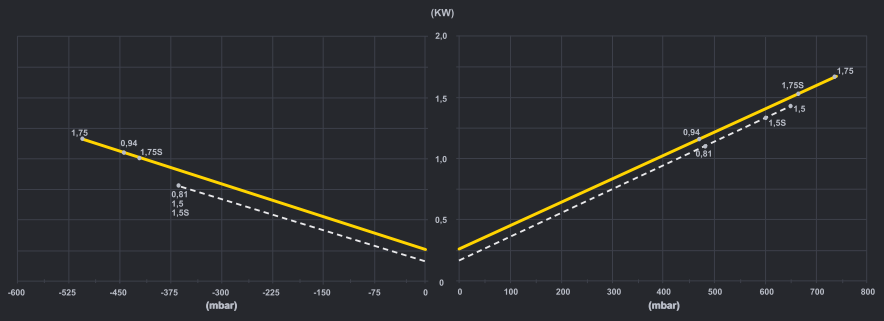


TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

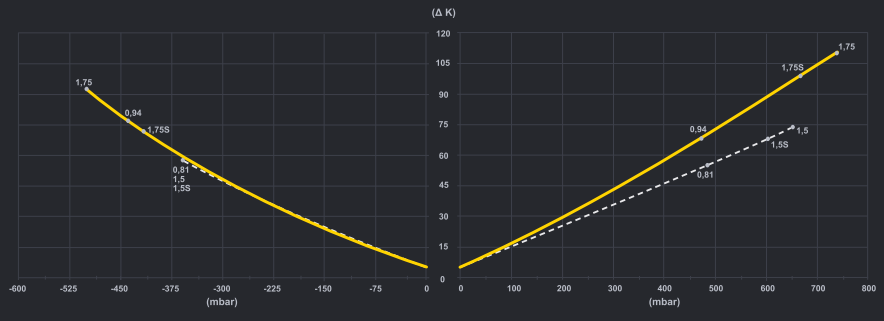

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0045-2ST810-6	0.94	220-275 Δ / 380-480 Y	Δ 4.0 / Y 2.3	60 m³/h 35 CFM	−6.4 psi −0.44 bar	7.0 psi 0.48 bar	62	24
STRP0045-2SA151-1	1.75	230	10.3	60 m³/h 35 CFM	−6.1 psi −0.42 bar	9.6 psi 0.66 bar	62	30
STRP0045-2ST151-6	1.75	220-275 Δ / 380-480 Y	Δ 7.6 / Y 4.4	60 m³/h 35 CFM	−7.3 psi −0.50 bar	10.7 psi 0.74 bar	62	28


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRP ….-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRP ….-..T...-5	500 Δ	575 Δ
STRP ….-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRP ….-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRP ….-..A...-1	230	230
STRP ….-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

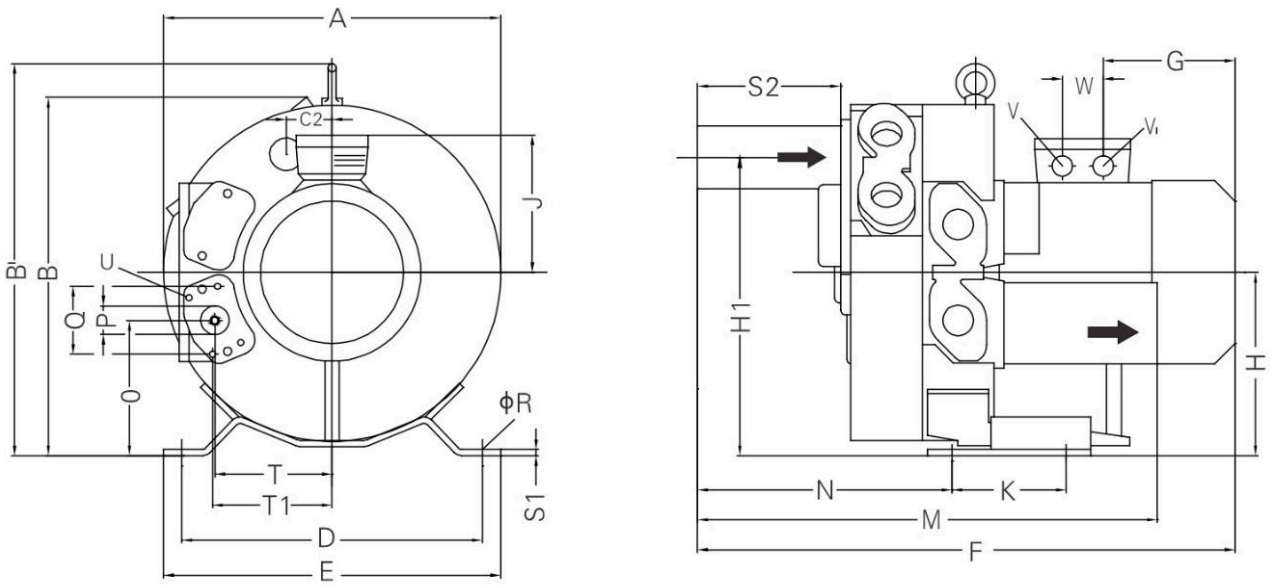

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0045-2ST810-6	313	326	359	43	260	298	469	130	167	272	111	105	426	241	123	G1 ¼"
STRP0045-2SA151-1	313	326	359	43	260	298	525	185	167	272	128	105	426	241	123	G1 ¼"
STRP0045-2ST151-6	313	326	359	43	260	298	525	185	167	272	128	105	426	241	123	G1 ¼"

Type	Q	ØR	S1	S2	S3	T	T1	U	V	V1	W
STRP0045-2ST810-6	64	14	4	140	31	105	107	M6 X 17	M16 X 1.5	M16 X 1.5	32
STRP0045-2SA151-1	64	14	4	140	31	105	107	M6 X 17	M25 X 1.5	M16 X 1.5	32
STRP0045-2ST151-6	64	14	4	140	31	105	107	M6 X 17	M25 X 1.5	M16 X 1.5	32

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com