HIGH-PERFORMANCE BLOWER · 2 STAGES IN SERIES

# High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



| 145 m³/h | 11.7 psi | −7.7 psi | 2.55–4.6 kW | 71 dB(A) | 40–51 kg |
|---|---|---|---|---|---|
| 85 CFM | 0.81 bar | −0.53 bar | | | |
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz


| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| 2 stages, series | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |

## PERFORMANCE CURVES

### FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

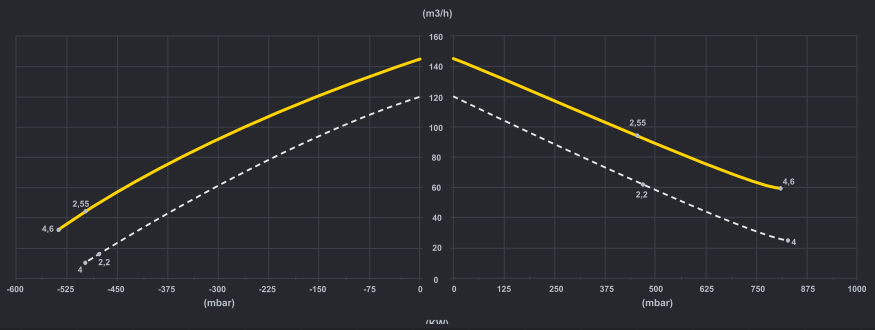


### POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

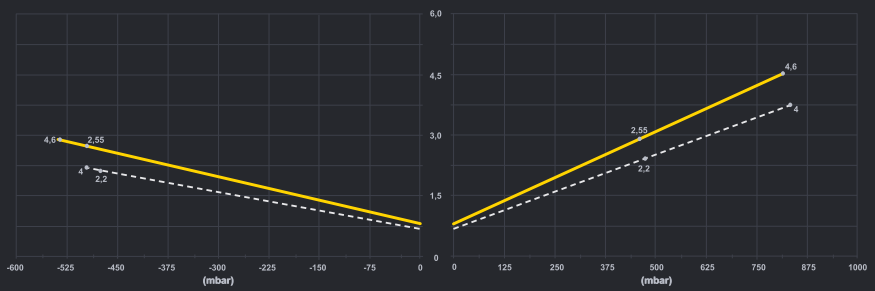


### TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

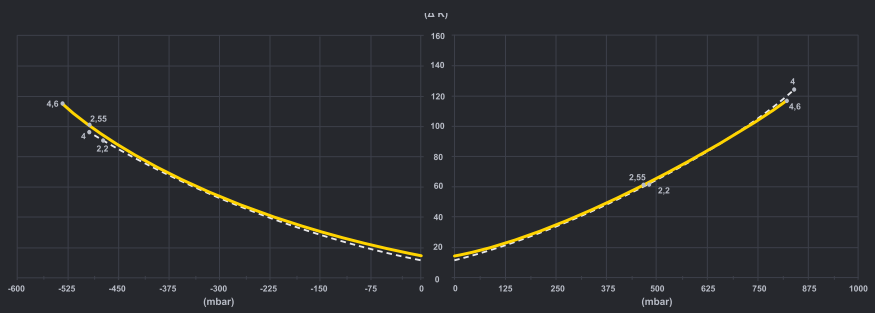


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

## MODELS · 60 Hz

| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRP0120-2ST221-6** | 2.55 | 220-275 Δ / 380-480 Y | Δ 11.2 / Y 6.5 | 145 m³/h<br>85 CFM | −7.3 psi<br>−0.50 bar | 6.5 psi<br>0.45 bar | 70 | 40 |
| **STRP0120-2ST401-7** | 4.6 | 380-480 Δ / 660-720 Y | Δ 9.5 / Y 4.5 | 145 m³/h<br>85 CFM | −7.7 psi<br>−0.53 bar | 11.7 psi<br>0.81 bar | 71 | 51 |


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


MOTOR CODES · AVAILABLE VOLTAGES

| CODE | 50 HZ (V) | 60 HZ (V) |
|---|---|---|
| **STRP ….-..T...-1** | 185-225 Δ / 320-390 Y | 200-240 Δ / 345-415 Y |
| **STRP ….-..T...-5** | 500 Δ | 575 Δ |
| **STRP ….-..T...-6** | 200-240 Δ / 345-415 Y | 220-275 Δ / 380-480 Y |
| **STRP ….-..T...-7** | 345-415 Δ / 600-720 Y | 380-480 Δ / 660-720 Y |
| **STRP ….-..A...-1** | 230 | 230 |
| **STRP ….-..S...-5** | 115/230 | 115/230 |

## DIMENSIONS

All dimensions in mm

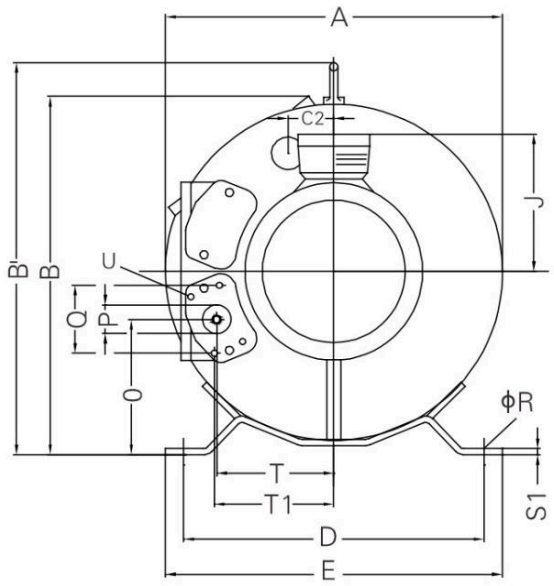

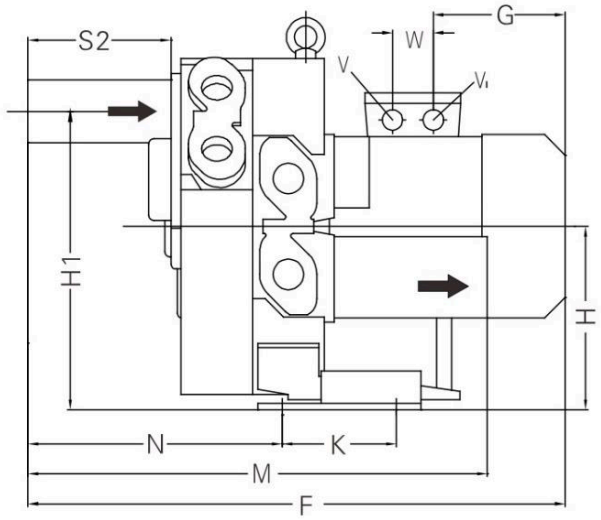
| Type | A | B | B' | C2 | D | E | F | G | H | H1 | J | K | M | N | O | P |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STRP0120-2ST221-6 | 387 | 402 | 435 | 57 | 328 | 363 | 549 | 185 | 206 | 343 | 128 | 152 | 453 | 256 | 148 | G1 ¼" |
| STRP0120-2ST401-7 | 387 | 402 | 435 | 57 | 328 | 363 | 603 | 211 | 206 | 343 | 148 | 152 | 453 | 256 | 148 | G1 ¼" |

| Type | Q | ØR | S1 | S2 | S3 | T | T1 | U | V | V1 | W |
|---|---|---|---|---|---|---|---|---|---|---|---|
| STRP0120-2ST221-6 | 64 | 14 | 4 | 140 | 31 | 137 | 138 | M6 × 17 | M25 × 1.5 | M16 × 1.5 | 42 |
| STRP0120-2ST401-7 | 64 | 14 | 4 | 140 | 31 | 137 | 138 | M6 × 17 | 2 X M32 × 1.5 | M16 × 1.5 | 32 |

**Let's size your blower.**
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com