
HIGH-PERFORMANCE BLOWER · SINGLE STAGE

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



195 m³/h	7.7 psi	−5.5 psi	2.55–3.8 kW	71 dB(A)	32–35 kg
115 CFM	0.53 bar	−0.38 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz


CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

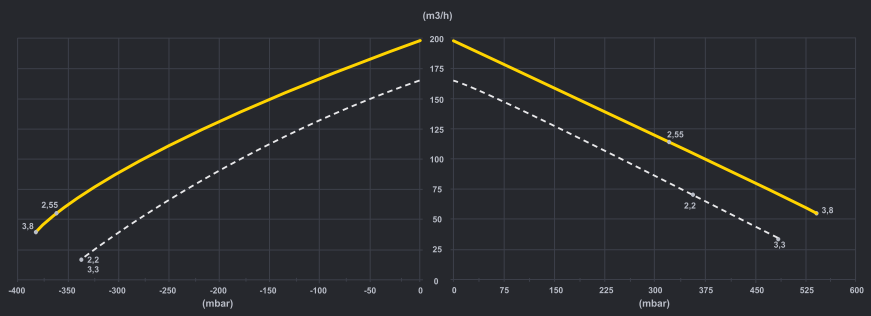

POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

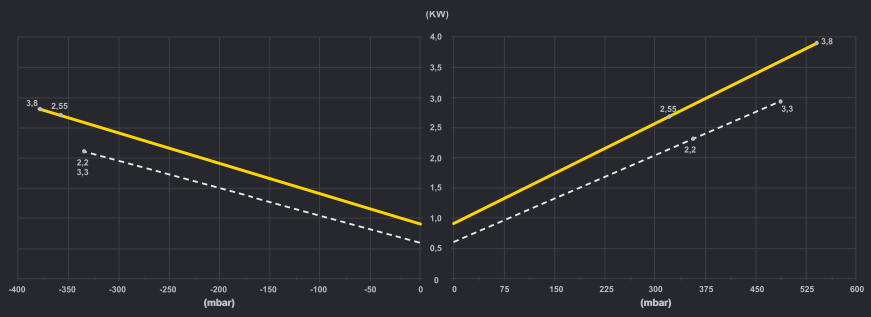

TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

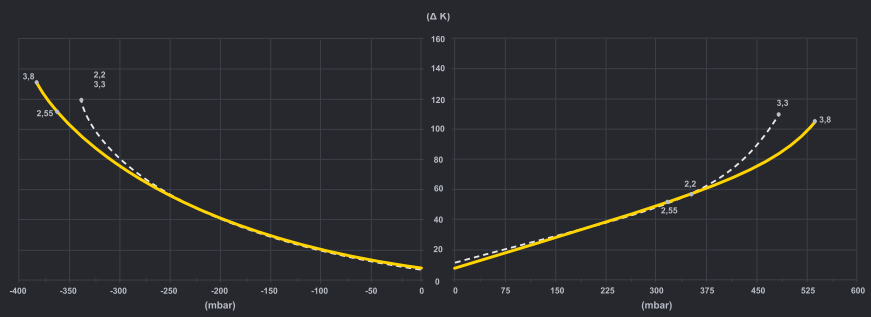

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0165-1MT221-6	2.55	220-275 Δ / 380-480 Y	Δ 11.2 / Y 6.5	195 m³/h 115 CFM	−5.2 psi −0.36 bar	4.6 psi 0.32 bar	71	32
STRP0165-1MT331-6	3.8	220-275 Δ / 380-480 Y	Δ 14.2 / Y 8.2	195 m³/h 115 CFM	−5.5 psi −0.38 bar	7.7 psi 0.53 bar	71	35


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRP ….-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRP ….-..T...-5	500 Δ	575 Δ
STRP ….-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRP ….-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRP ….-..A...-1	230	230
STRP ….-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

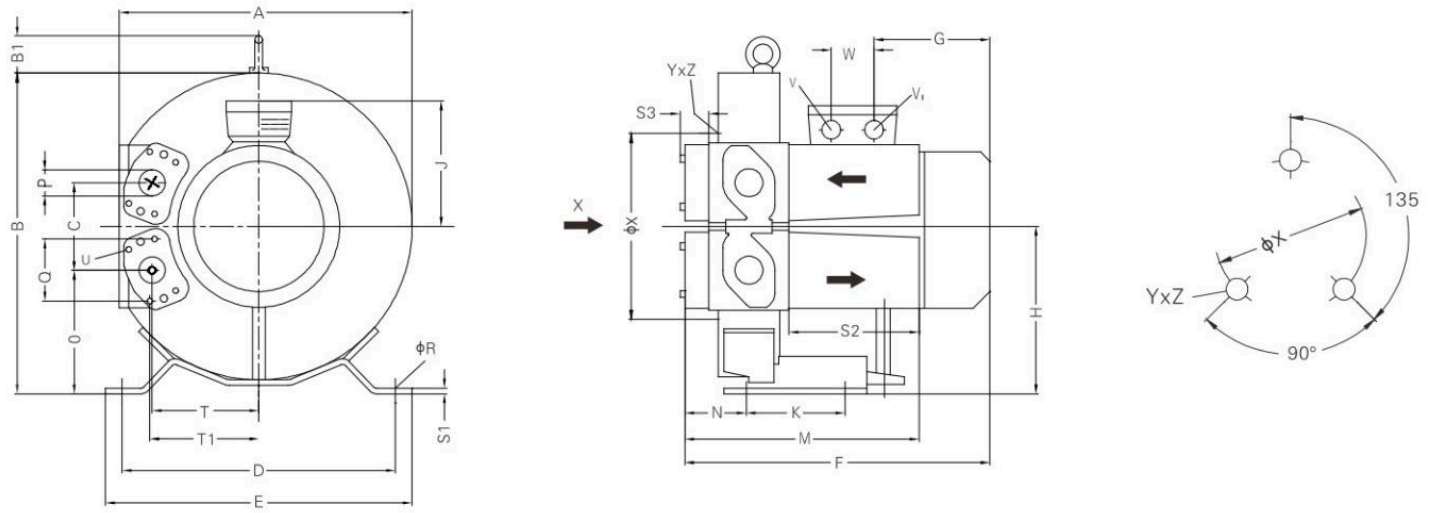

Type	A	B	B1	C	D	E	F	G	H	J	K	M	N	O	P
STRP0165-1MT221-6	418	455	39	127	371	406	364	185	235	128	152	271	72	172	G1 ¼"
STRP0165-1MT331-6	418	455	39	127	371	406	390	211	235	128	152	271	72	172	G1 ¼"

Type	Q	R	S1	S2	S3	T	T1	U	V	V1	W	X	YxZ
STRP0165-1MT221-6	64	14	5	140	31	153	155	M6 X 17	–	M16 X 1.5	32	228	M8 X 15
STRP0165-1MT331-6	64	14	5	140	31	153	155	M6 X 17	–	M16 X 1.5	32	228	M8 X 15

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com