

STROV-0500

Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven



PUMPING SPEED

300 / 250 m³/h

END VACUUM

H 0.1 mbar

MOTOR (3-PHASE)

7.5 / 5.5 kW

Made in South Korea

CE marked

SPECIFICATIONS

Pumping speed (displacement)	300 m ³ /h (177 cfm) @ 60 Hz / 250 m ³ /h (147 cfm) @ 50 Hz
End vacuum, absolute	H: 0.1 mbar
Three-phase motor, IEC	7.5 kW @ 60 Hz / 5.5 kW @ 50 Hz
Three-phase motor, NEMA	10 hp @ 60 Hz
Speed	1740 rpm @ 60 Hz / 1450 rpm @ 50 Hz
Noise level	77 dB(A) @ 60 Hz / 74 dB(A) @ 50 Hz
Operating temperature	82 / 85 °C
Oil capacity	8 L
Connections (inlet / exhaust)	2" / 2" G (BSP) / NPT
Weight with motor, without oil	184 kg

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator
- TEFC high-efficiency motor
- Anti-suck-back valve

OPTIONAL EQUIPMENT

- Exhaust pressure gauge
- Oil level switch (port)


VERSIONS

- H: deep vacuum, 0.1 mbar, continuous duty with float valve system

- Oil level sight glass
- Gas ballast valve
- Gas ballast valve (N, F and NM versions)
- Built-in float valve for oil return
- Spin-on oil filter

- Temperature switch (port)
- Heater

DIMENSIONS

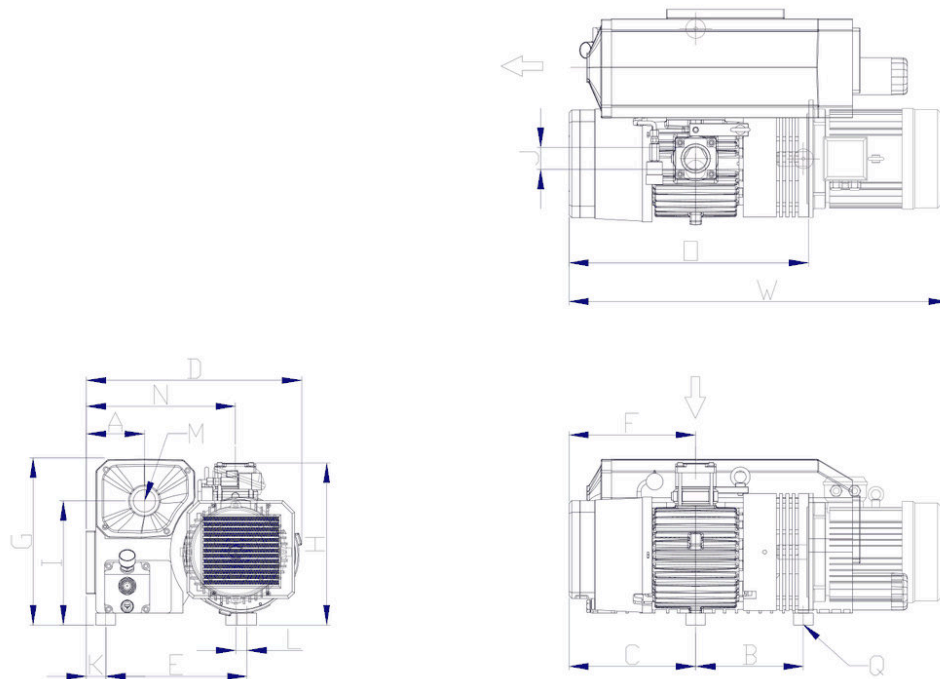

* The dimensions in () are for 50Hz

MODEL	W	D	H	A	B	C	E	F	G	I	J	K	L	M	N	□	Q
STROV-0500	1006 (968)	550	413	149	275	323	360	324	426	316	G 2"	50	29	G 2"	380	612	3xM10
STROV-0600	1032 (1006)				311								31				

* The dimensions in () are for 50Hz

Dimensions in mm. Dimensions in brackets are for 50 Hz.

OPTIONS THAT FIT YOUR SUGAR BUSH



Heater. A thermostat-controlled heater can be installed on the service cover. It warms the oil before start-up when the ambient temperature is below 5 °C, or heats the oil to about 75 °C to drive off moisture entering the pump from the first minutes of operation. An oil level switch is required, to protect the heater from overheating if the oil level falls below the element.

Available heater power (AC, voltage on request): **1/1.5 kW**