

# STROV-0600

## Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven



### PUMPING SPEED

**360 / 300 m<sup>3</sup>/h**

### END VACUUM

**H 0.1 mbar**

### MOTOR (3-PHASE)

**9.2 / 7.5 kW**

Made in South Korea

CE marked

## SPECIFICATIONS

|                                |                                                                                   |
|--------------------------------|-----------------------------------------------------------------------------------|
| Pumping speed (displacement)   | 360 m <sup>3</sup> /h (212 cfm) @ 60 Hz / 300 m <sup>3</sup> /h (177 cfm) @ 50 Hz |
| End vacuum, absolute           | H: 0.1 mbar                                                                       |
| Three-phase motor, IEC         | 9.2 kW @ 60 Hz / 7.5 kW @ 50 Hz                                                   |
| Three-phase motor, NEMA        | 11.5 hp @ 60 Hz                                                                   |
| Speed                          | 1740 rpm @ 60 Hz / 1450 rpm @ 50 Hz                                               |
| Noise level                    | 78 dB(A) @ 60 Hz / 75 dB(A) @ 50 Hz                                               |
| Operating temperature          | 83 / 86 °C                                                                        |
| Oil capacity                   | 8 L                                                                               |
| Connections (inlet / exhaust)  | 2" / 2" G (BSP) / NPT                                                             |
| Weight with motor, without oil | 188 kg                                                                            |

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

## FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

## STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator
- TEFC high-efficiency motor
- Anti-suck-back valve

## OPTIONAL EQUIPMENT

- Exhaust pressure gauge
- Oil level switch (port)


## VERSIONS

- H: deep vacuum, 0.1 mbar, continuous duty with float valve system

- Oil level sight glass
- Gas ballast valve
- Gas ballast valve (N, F and NM versions)
- Built-in float valve for oil return
- Spin-on oil filter

- Temperature switch (port)
- Heater

## DIMENSIONS

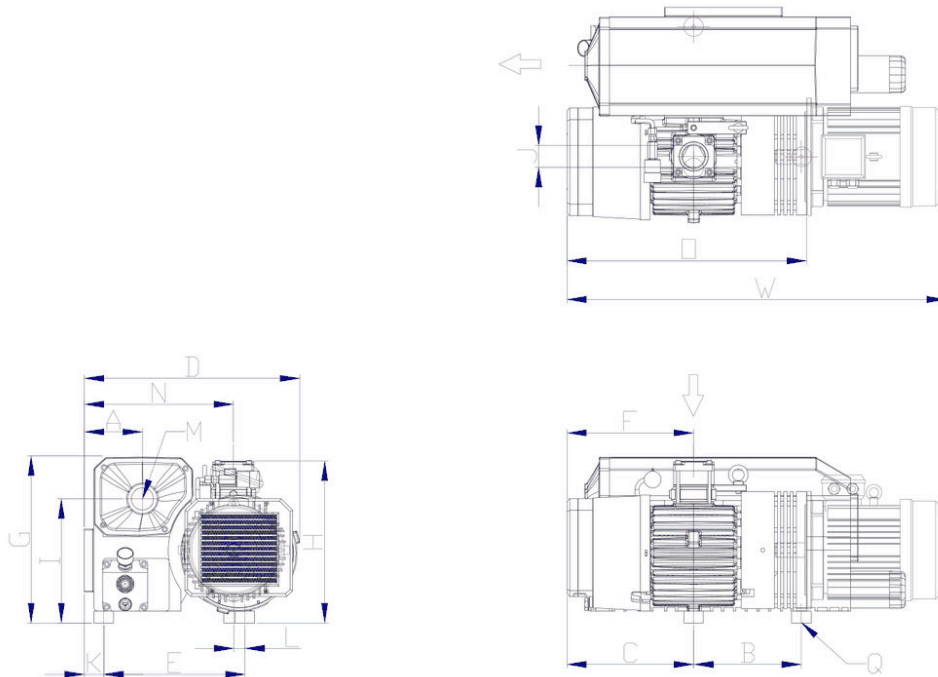

\* The dimensions in ( ) are for 50Hz

| MODEL      | W           | D   | H   | A   | B   | C   | E   | F   | G   | I   | J    | K  | L  | M    | N   | □   | Q     |
|------------|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----|----|------|-----|-----|-------|
| STROV-0500 | 1006 (968)  | 550 | 413 | 149 | 275 | 323 | 360 | 324 | 426 | 316 | G 2" | 50 | 29 | G 2" | 380 | 612 | 3xM10 |
| STROV-0600 | 1032 (1006) |     |     |     | 311 |     |     |     |     |     |      |    | 31 |      |     |     |       |

\* The dimensions in ( ) are for 50Hz

Dimensions in mm. Dimensions in brackets are for 50 Hz.

## OPTIONS THAT FIT YOUR SUGAR BUSH



**Heater.** A thermostat-controlled heater can be installed on the service cover. It warms the oil before start-up when the ambient temperature is below 5 °C, or heats the oil to about 75 °C to drive off moisture entering the pump from the first minutes of operation. An oil level switch is required, to protect the heater from overheating if the oil level falls below the element.

Available heater power (AC, voltage on request): **1/1.5 kW**