

STROV-0605

Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven



PUMPING SPEED

340 / 280 m³/h

END VACUUM

GB closed 0.08 mbar · GB open 0.5 mbar

MOTOR (3-PHASE)

7.5 / 5.5 kW

Made in South Korea

CE marked

SPECIFICATIONS

Pumping speed (displacement)	340 m ³ /h (200 cfm) @ 60 Hz / 280 m ³ /h (165 cfm) @ 50 Hz
End vacuum, absolute	GB closed: 0.08 mbar · GB open: 0.5 mbar
Three-phase motor, IEC	7.5 kW @ 60 Hz / 5.5 kW @ 50 Hz
Three-phase motor, NEMA	10 hp @ 60 Hz
Speed	1740 rpm @ 60 Hz / 1450 rpm @ 50 Hz
Noise level	74 dB(A) @ 60 Hz / 70 dB(A) @ 50 Hz
Operating temperature	82 / 85 °C
Oil capacity	8 L
Connections (inlet / exhaust)	2" / 2" G (BSP) / NPT
Weight with motor, without oil	194 / 203 kg

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator

OPTIONAL EQUIPMENT

- Exhaust pressure gauge
- Oil level switch (port)
- Temperature switch (port)


VERSIONS

- Gas ballast closed: 0.08 mbar. Gas ballast open: 0.5 mbar. Float valve system for oil return.

- TEFC high-efficiency motor
- Anti-suck-back valve
- Oil level sight glass
- Built-in float valve for oil return

- Heater
- Gas ballast valve
- Spin-on oil filter

DIMENSIONS

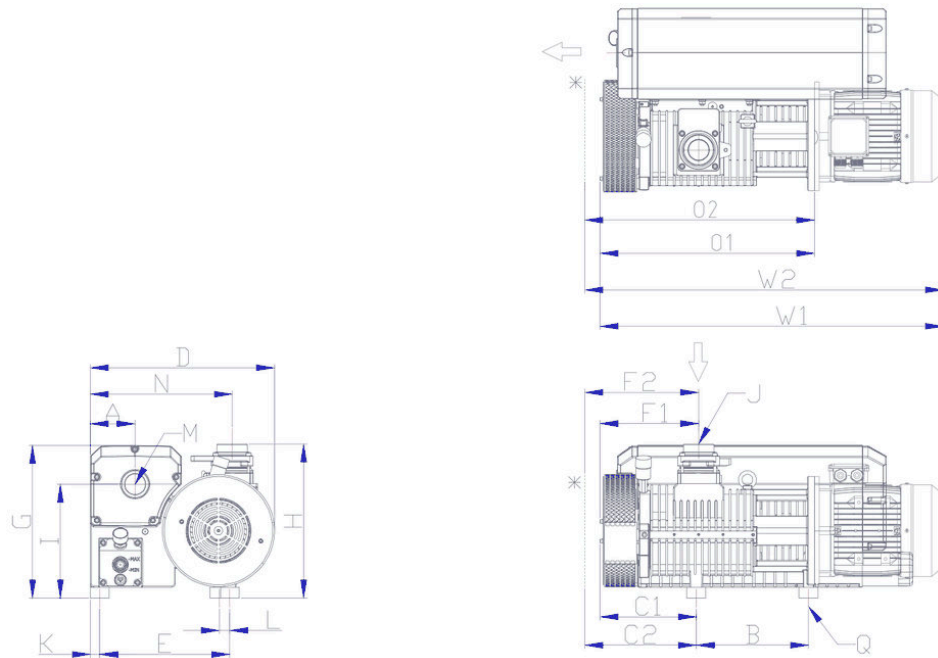

MODEL	Hz	W1	W2	D	H	A	B	C1	C2	E	F1	F2	G	I	J	K	L	M	N	O1	O2	Q
STROV-0605	50	950	992	509	426	124	311	266	308	360	273	315	422	315	G 2"	26	29	G 2"	392	594	636	3xM10
	60	988	1030																			

* Larger Size Cooler (Option)

Dimensions in mm. Dimensions in brackets are for 50 Hz.

OPTIONS THAT FIT YOUR SUGAR BUSH



Heater. A thermostat-controlled heater can be installed on the service cover. It warms the oil before start-up when the ambient temperature is below 5 °C, or heats the oil to about 75 °C to drive off moisture entering the pump from the first minutes of operation. An oil level switch is required, to protect the heater from overheating if the oil level falls below the element.

Available heater power (AC, voltage on request): **1 / 1.5 kW**