


STROV-0800

Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven

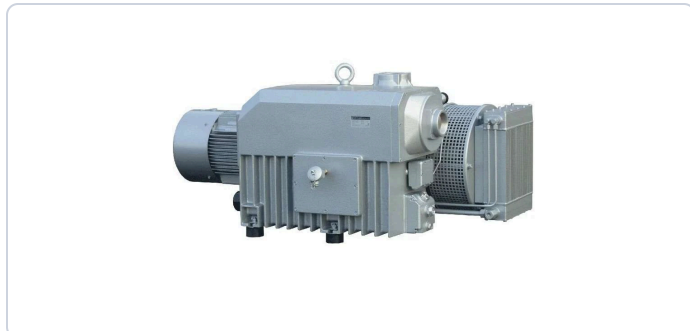

PUMPING SPEED

505 / 420 m³/h

END VACUUM

H 0.1 mbar · L 10 mbar

MOTOR (3-PHASE)

15 / 11 kW

Made in South Korea

CE marked

SPECIFICATIONS

Pumping speed (displacement)	505 m ³ /h (297 cfm) @ 60 Hz / 420 m ³ /h (247 cfm) @ 50 Hz
End vacuum, absolute	H: 0.1 mbar · L: 10 mbar
Three-phase motor, IEC	15 kW @ 60 Hz / 11 kW @ 50 Hz
Three-phase motor, NEMA	20 hp @ 60 Hz
Speed	1160 rpm @ 60 Hz / 980 rpm @ 50 Hz
Noise level	78 dB(A) @ 60 Hz / 76 dB(A) @ 50 Hz
Operating temperature	78 / 81 °C
Oil capacity	19 L
Connections (inlet / exhaust)	3" / 3" G (BSP) / NPT
Weight with motor, without oil	491 / 504 kg

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator
- TEFC high-efficiency motor

OPTIONAL EQUIPMENT

- Exhaust pressure gauge
- Oil level switch (port)


VERSIONS

- H and N: deep vacuum, continuous duty (H with float valve system, N with oil return line)
- L: medium vacuum, 10 mbar, continuous duty with oil return line

- Anti-suck-back valve
- Oil level sight glass
- Gas ballast valve
- Spin-on oil filter


- Temperature switch (port)
- Heater
- Float valve assembly for oil return

PERFORMANCE CURVE

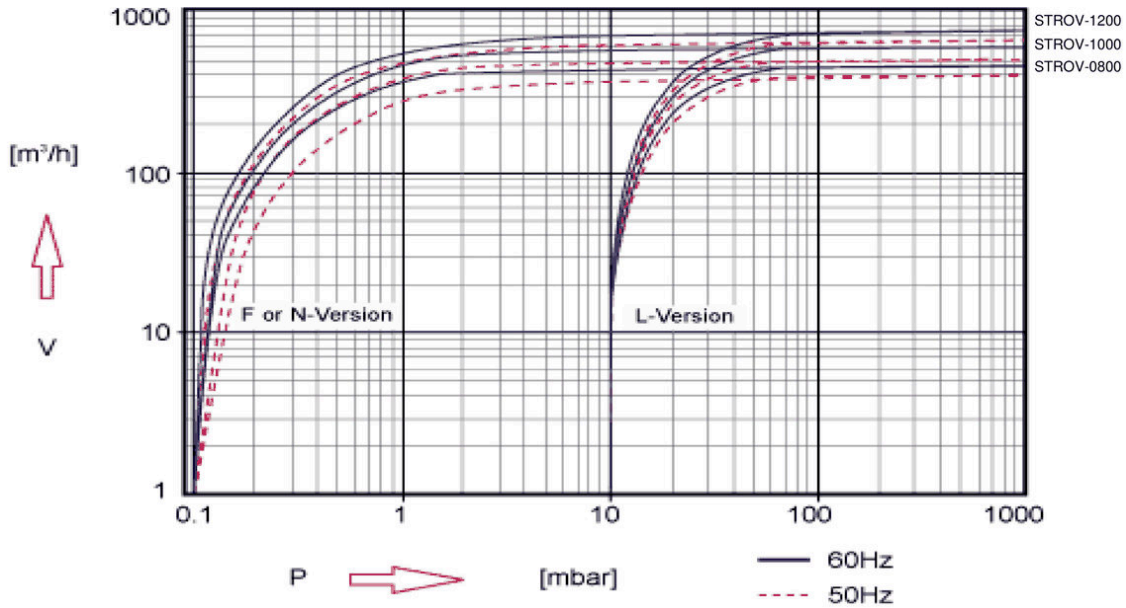

The curve covers the models of this series; each model plateaus at its own pumping speed.

DIMENSIONS

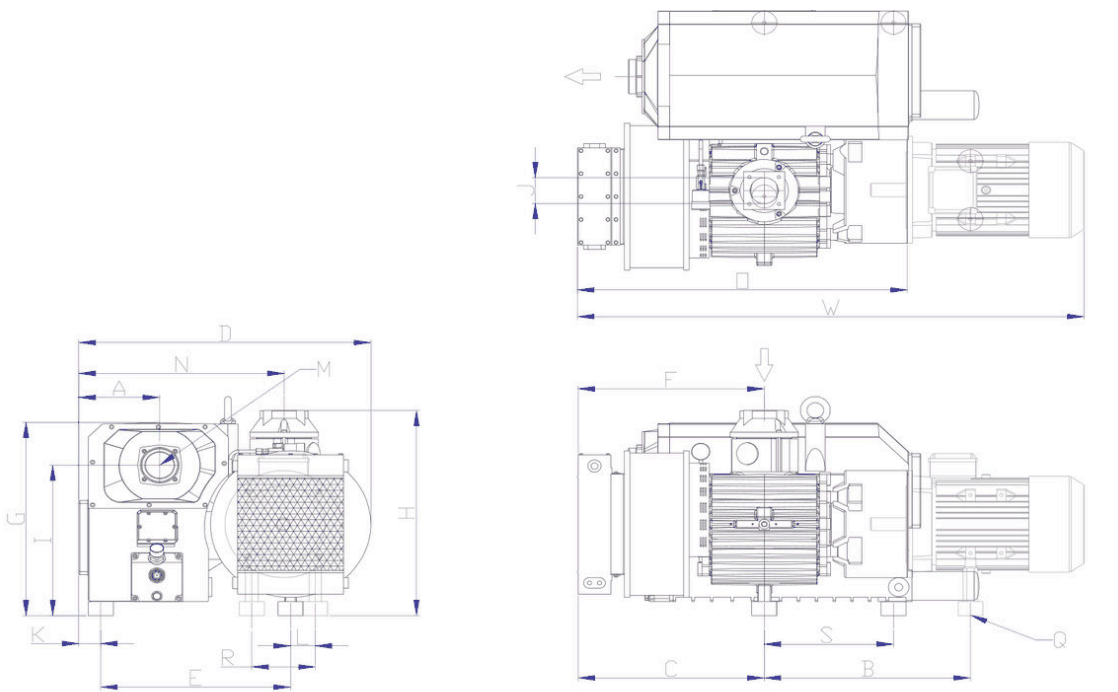

DIMENSIONS	W	D	H	A	B	C	E	F	G	I	J	K	L	M	N	O	Q	R	S
STROV-1200	1747 (1652)				636 (584)	595		595					138 (118)			1097 (1057)		318 (279)	
STROV-1000	1583 (1517)	874	671	242	549 (617)	559	569	559	631	491	G3"	65	118 (74)	G3"	614	988	4x12	279 (190)	387
STROV-0800	1484 (1418)				417 (585)	494		494					118 (74)			889		279 (190)	

* The dimensions in () are for 50Hz

Dimensions in mm. Dimensions in brackets are for 50 Hz.

OPTIONS THAT FIT YOUR SUGAR BUSH



Heater. A thermostat-controlled heater can be installed on the service cover. It warms the oil before start-up when the ambient temperature is below 5 °C, or heats the oil to about 75 °C to drive off moisture entering the pump from the first minutes of operation. An oil level switch is required, to protect the heater from overheating if the oil level falls below the element.

Available heater power (AC, voltage on request): **2 / 3 kW**