


STROV-1200

Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven

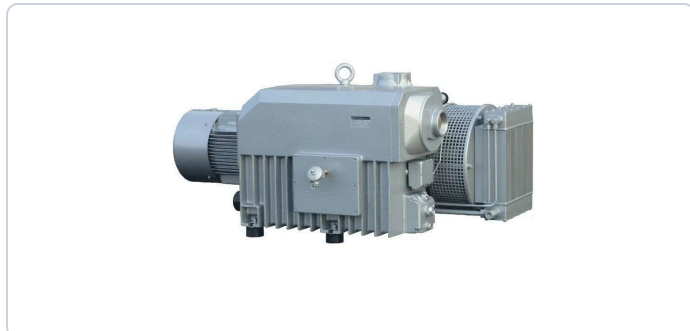

PUMPING SPEED

780 / 660 m³/h

END VACUUM

H 0.1 mbar · L 10 mbar

MOTOR (3-PHASE)

18.5 / 15 kW

Made in South Korea

CE marked

SPECIFICATIONS

Pumping speed (displacement)	780 m ³ /h (459 cfm) @ 60 Hz / 660 m ³ /h (388 cfm) @ 50 Hz
End vacuum, absolute	H: 0.1 mbar · L: 10 mbar
Three-phase motor, IEC	18.5 kW @ 60 Hz / 15 kW @ 50 Hz
Three-phase motor, NEMA	25 hp @ 60 Hz
Speed	1160 rpm @ 60 Hz / 980 rpm @ 50 Hz
Noise level	79 dB(A) @ 60 Hz / 77 dB(A) @ 50 Hz
Operating temperature	80 / 83 °C
Oil capacity	19 L
Connections (inlet / exhaust)	3" / 3" G (BSP) / NPT
Weight with motor, without oil	582 / 703 kg

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator
- TEFC high-efficiency motor

OPTIONAL EQUIPMENT

- Exhaust pressure gauge
- Oil level switch (port)


VERSIONS

- H and N: deep vacuum, continuous duty (H with float valve system, N with oil return line)
- L: medium vacuum, 10 mbar, continuous duty with oil return line

- Anti-suck-back valve
- Oil level sight glass
- Gas ballast valve
- Spin-on oil filter


- Temperature switch (port)
- Heater
- Float valve assembly for oil return

PERFORMANCE CURVE

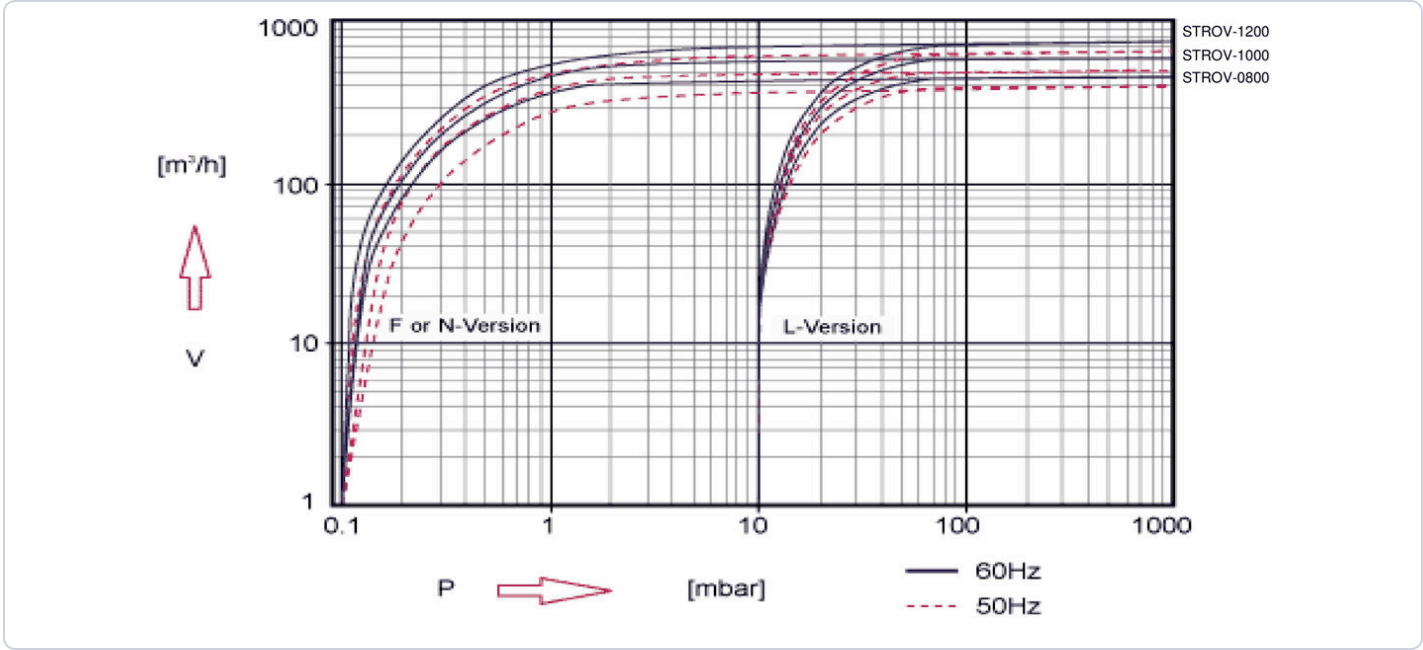

The curve covers the models of this series; each model plateaus at its own pumping speed.

DIMENSIONS

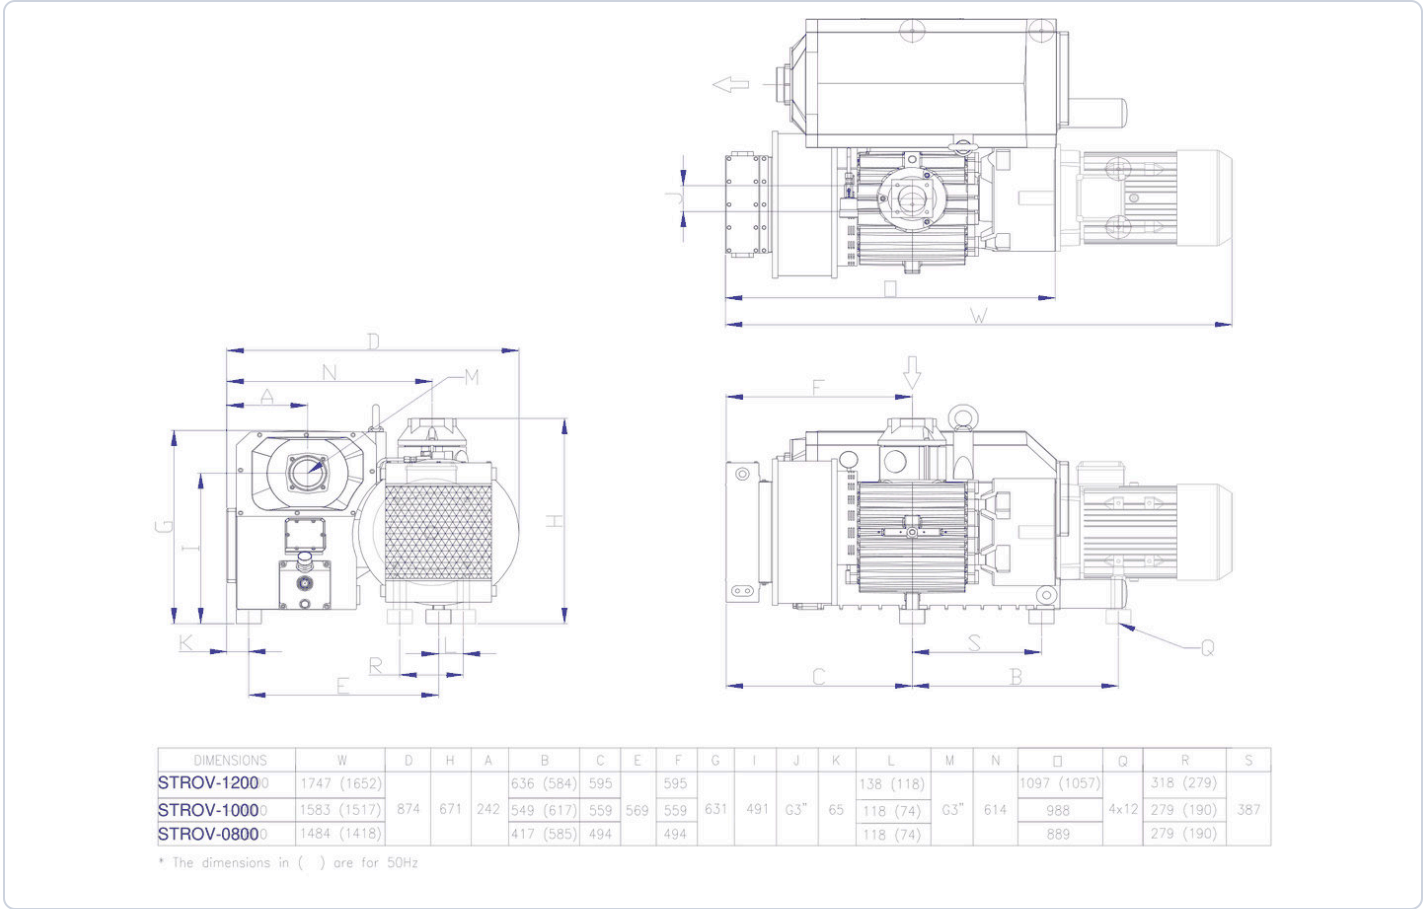

Dimensions in mm. Dimensions in brackets are for 50 Hz.

OPTIONS THAT FIT YOUR SUGAR BUSH



Heater. A thermostat-controlled heater can be installed on the service cover. It warms the oil before start-up when the ambient temperature is below 5 °C, or heats the oil to about 75 °C to drive off moisture entering the pump from the first minutes of operation. An oil level switch is required, to protect the heater from overheating if the oil level falls below the element.

Available heater power (AC, voltage on request): **2 / 3 kW**