


STROV-1500

Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven

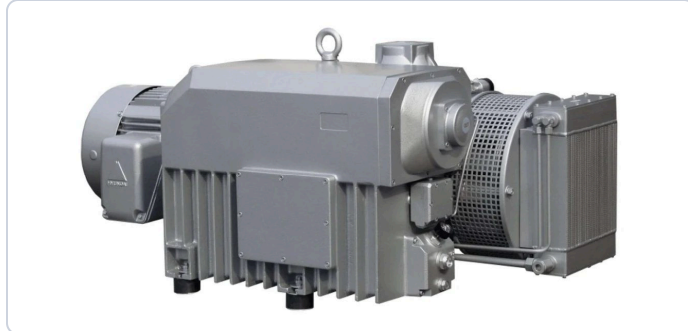

PUMPING SPEED

750 m³/h

END VACUUM

H 0.5 mbar · L 10 mbar

MOTOR (3-PHASE)

18.5 kW

Made in South Korea

CE marked

SPECIFICATIONS

Pumping speed (displacement)	750 m ³ /h (441 cfm) @ 50 Hz
End vacuum, absolute	H: 0.5 mbar · L: 10 mbar
Three-phase motor, IEC	18.5 kW @ 50 Hz
Speed	1450 rpm @ 50 Hz
Noise level	79 dB(A) @ 50 Hz
Operating temperature	85 °C
Oil capacity	19 L
Connections (inlet / exhaust)	3" / 3" G (BSP) / NPT
Weight with motor, without oil	535 kg

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator
- TEFC high-efficiency motor

OPTIONAL EQUIPMENT

- Oil level switch (port)
- Temperature switch (port)


VERSIONS

- H and N: deep vacuum, continuous duty (H with float valve system, N with oil return line)
- L: medium vacuum, 10 mbar, continuous duty with oil return line

- Anti-suck-back valve
- Oil level sight glass
- Gas ballast valve
- Spin-on oil filter
- Exhaust pressure gauge

- Heater
- Float valve assembly for oil return

DIMENSIONS

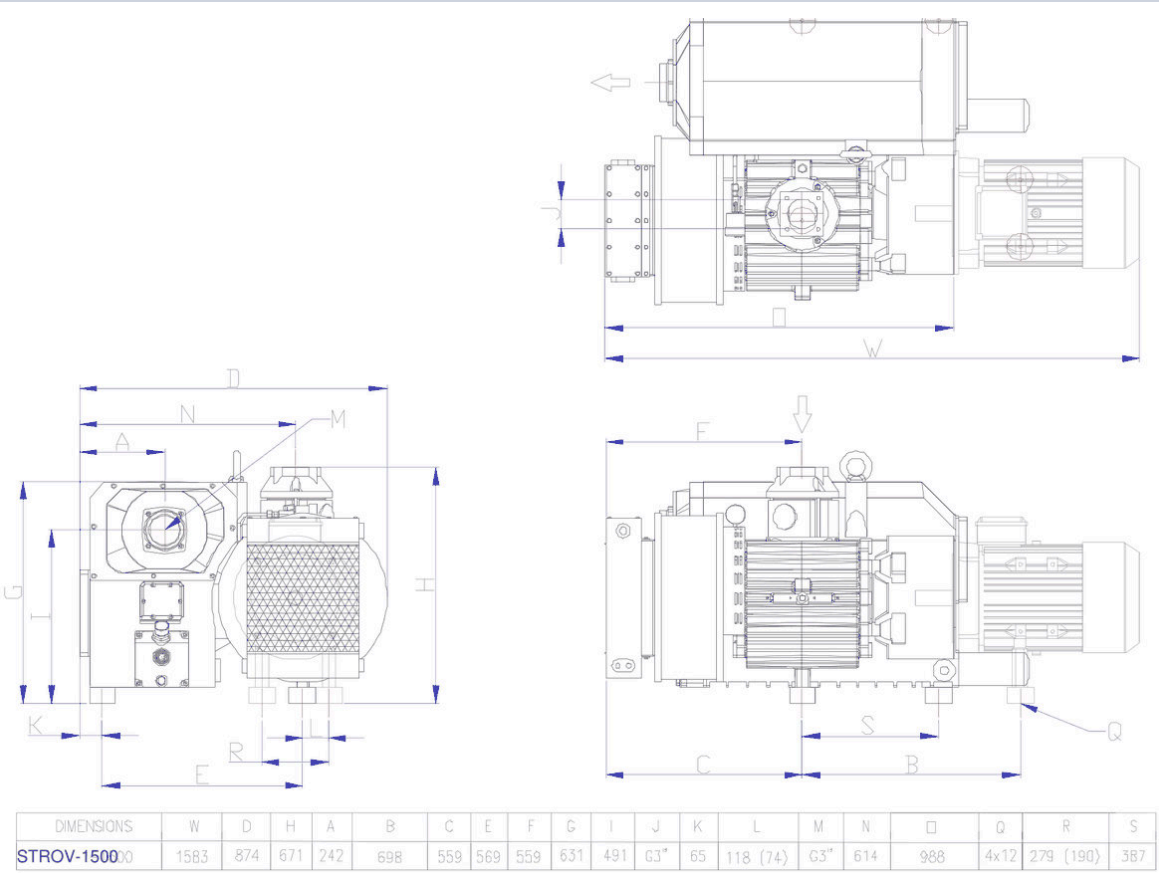

Dimensions in mm. Dimensions in brackets are for 50 Hz.