REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

175 m³/h	3.2 psi	−3.0 psi	0.83–1.5 kW	64 dB(A)	13–17 kg
103 CFM	0.22 bar	−0.21 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **Single stage**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS

TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0140-1MT700-6	50	0.7	200-240 Δ / 345-415 Y	3.8 Δ / 2.2 Y	140 m³/h 82 CFM	−1.7 psi −0.12 bar	1.7 psi 0.12 bar	63	13
	60	0.83	220-275 Δ / 380-480 Y	3.75 Δ / 2.15 Y	175 m³/h 103 CFM	−1.9 psi −0.13 bar	1.9 psi 0.13 bar	64	
STRC0140-1MA800-1	50	0.8	230	5.2	140 m³/h 82 CFM	−2.2 psi −0.15 bar	2.3 psi 0.16 bar	63	15
	60	0.9	230	5.8	175 m³/h 103 CFM	−2.3 psi −0.16 bar	2.0 psi 0.14 bar	64	
STRC0140-1MT850-6	50	0.85	200-240 Δ / 345-415 Y	4.2 Δ / 2.4 Y	140 m³/h 82 CFM	−2.3 psi −0.16 bar	2.3 psi 0.16 bar	63	16
	60	0.95	220-275 Δ / 380-480 Y	4.0 Δ / 2.3 Y	175 m³/h 103 CFM	−2.3 psi −0.16 bar	2.3 psi 0.16 bar	64	
STRC0140-1MA111-1	50	1.1	230	7.3	140 m³/h 82 CFM	−2.2 psi −0.15 bar	2.8 psi 0.19 bar	63	16
	60	1.3	230	8.3	175 m³/h 103 CFM	−2.6 psi −0.18 bar	2.8 psi 0.19 bar	64	
STRC0140-1MT131-6	50	1.3	200-240 Δ / 345-415 Y	5.7 Δ / 3.3 Y	140 m³/h 82 CFM	−2.5 psi −0.17 bar	2.9 psi 0.20 bar	63	17
	60	1.5	220-275 Δ / 380-480 Y	5.7 Δ / 3.3 Y	175 m³/h 103 CFM	−3.0 psi −0.21 bar	3.2 psi 0.22 bar	64	


Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

← VACUUM COMPRESSION →

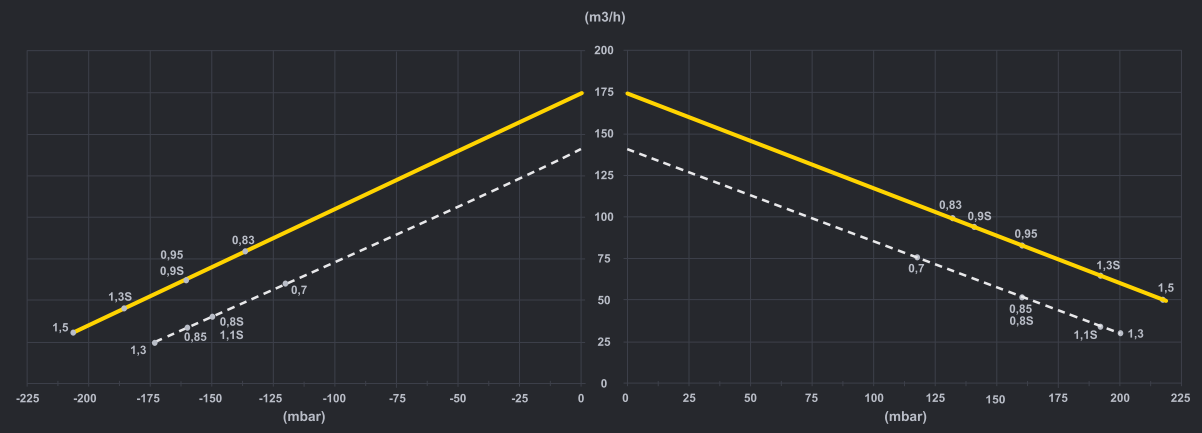


POWER VS PRESSURE

← VACUUM COMPRESSION →

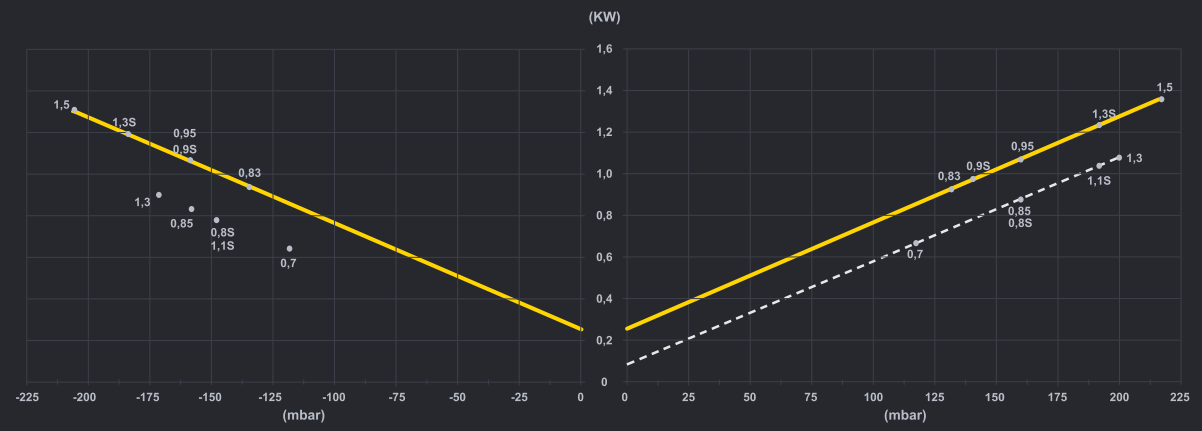

TEMPERATURE RISE VS PRESSURE

← VACUUM COMPRESSION →

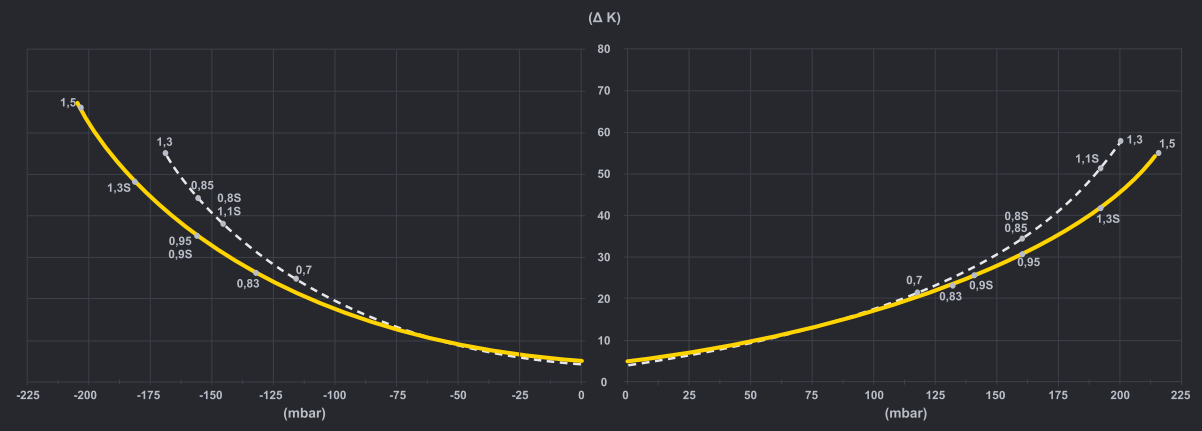


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

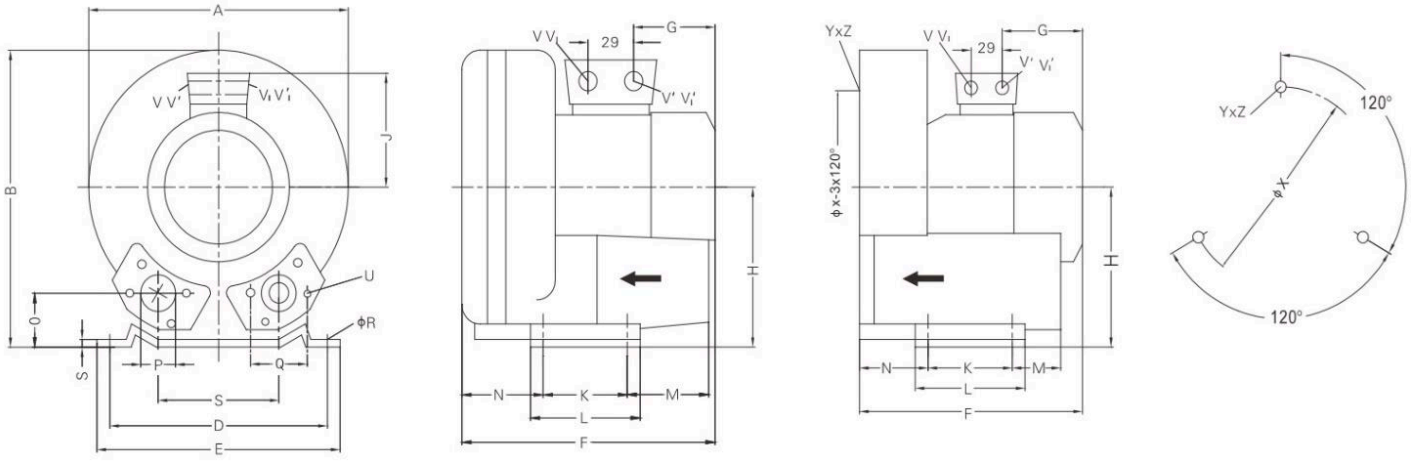

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX
STRC0140-1MT700-6	286	302	115	225	225	269	129	154	111	95	130	70	75	46	G 1 1/2"	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0140-1MA800-1	286	302	115	225	225	294	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0140-1MT850-6	286	302	115	225	225	292	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0140-1MA111-1	286	302	115	225	225	294	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0140-1MT131-6	286	302	115	225	225	292	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved