
REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.

Vacuum or pressure · Continuous duty

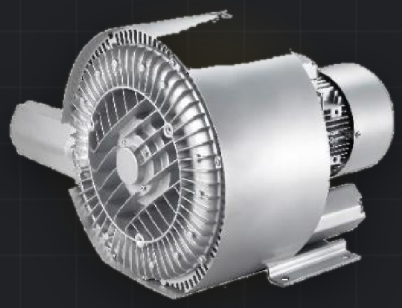

180 m³/h	6.1 psi	−5.1 psi	1.75–20.5 kW	69 dB(A)	25–27 kg
106 CFM	0.42 bar	−0.35 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **2 stages, series**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0140-2SA151-1	50	1.5	230	9	150 m³/h 88 CFM	−4.1 psi −0.28 bar	4.2 psi 0.29 bar	66	26
	60	1.75	230	10	180 m³/h 106 CFM	−3.6 psi −0.25 bar	4.1 psi 0.28 bar	69	
STRC0140-2ST161-6	50	1.6	200-240 Δ / 345-415 Y	7.5 Δ / 4.3 Y	150 m³/h 88 CFM	−4.1 psi −0.28 bar	4.1 psi 0.28 bar	66	25
	60	20.5	220-275 Δ / 380-480 Y	7.6 Δ / 4.4 Y	180 m³/h 106 CFM	−4.6 psi −0.32 bar	4.5 psi 0.31 bar	69	
STRC0140-2ST221-6	50	2.2	200-240 Δ / 345-415 Y	9.7 Δ / 5.6 Y	150 m³/h 88 CFM	−4.6 psi −0.32 bar	6.1 psi 0.42 bar	66	27
	60	2.55	220-275 Δ / 380-480 Y	10.3 Δ / 6.0 Y	180 m³/h 106 CFM	−5.1 psi −0.35 bar	6.1 psi 0.42 bar	69	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

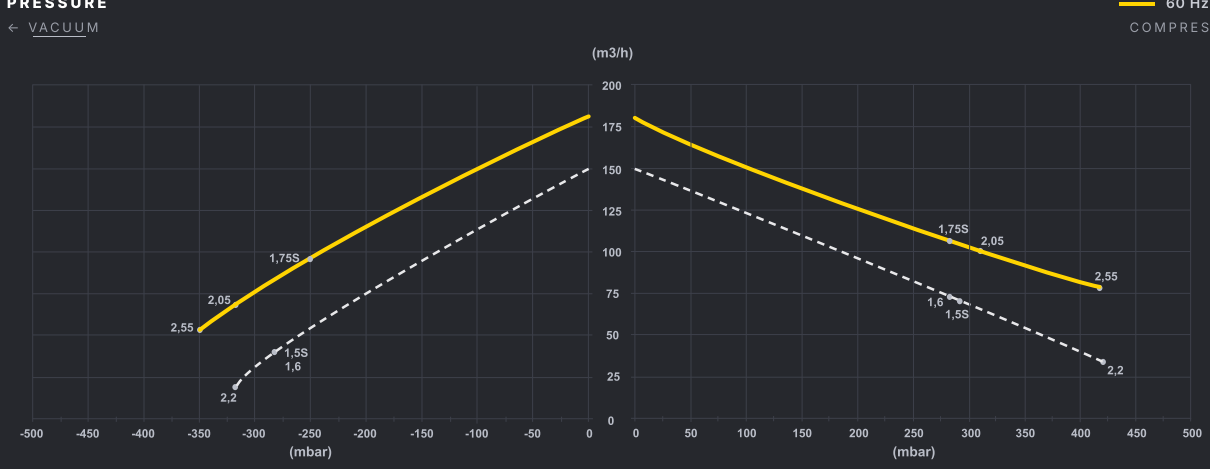

POWER VS PRESSURE

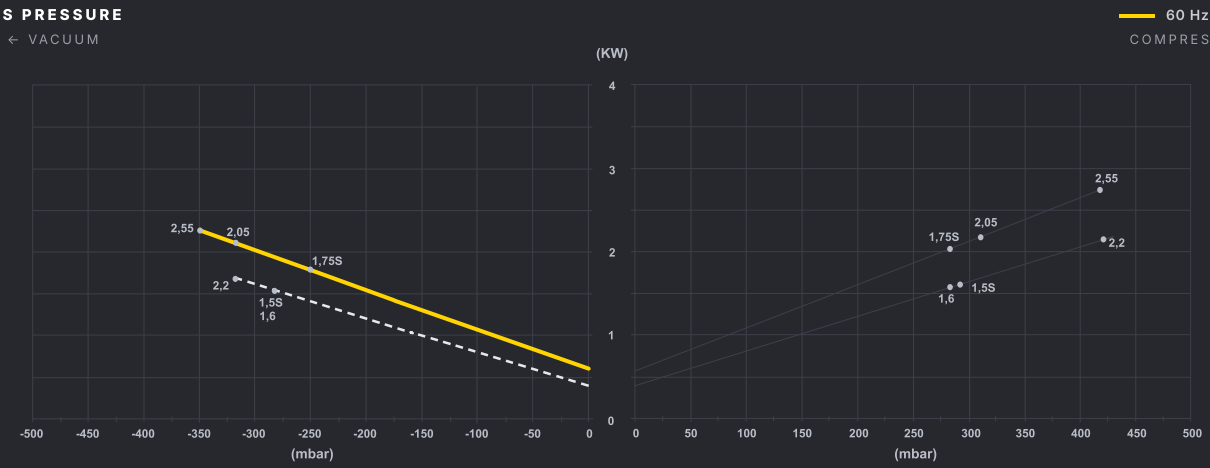

TEMPERATURE RISE VS PRESSURE

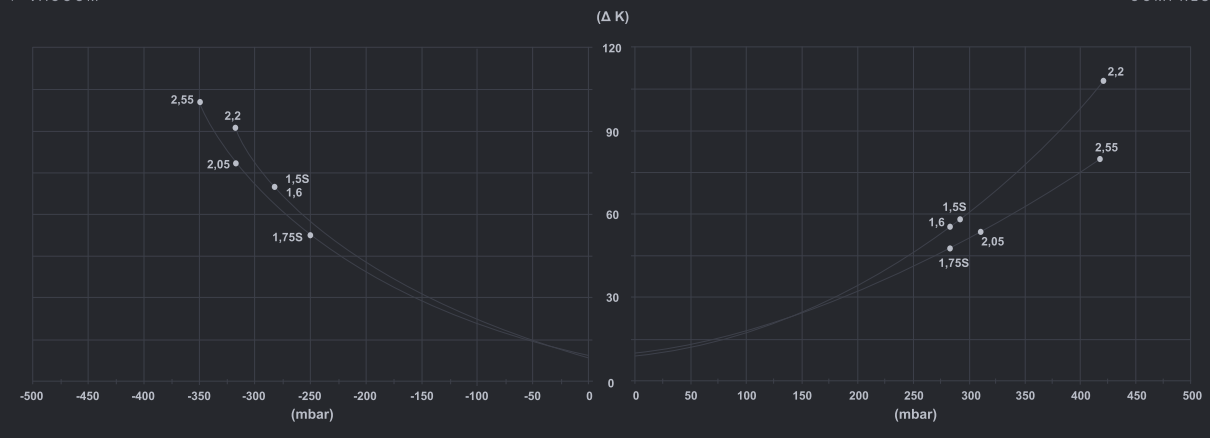



Every unit can be used as a vacuum pump or as a compressor, in continuous duty.


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

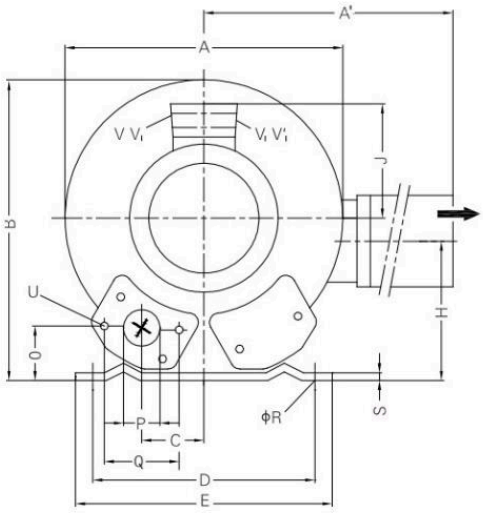

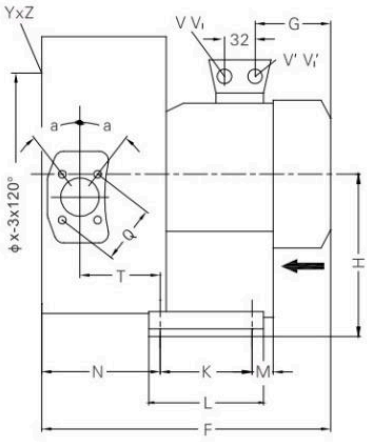



Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes
STRC0140-2SA151-1	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G 1 1/2"	72	12	3	104	M6 × 19	M25 × 1.5	M16 × 1.5	174	M6 × 19	51°/171°/291°
STRC0140-2ST161-6	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G 1 1/2"	72	12	3	104	M6 × 19	M25 × 1.5	M16 × 1.5	174	M6 × 15	51°/171°/291°
STRC0140-2ST221-6	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G 1 1/2"	72	12	3	104	M6 × 19	M16 × 1.5	M25 × 1.5	174	M6 × 15	51°/171°/291°

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved