REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

210 m³/h	2.3 psi	−2.9 psi	0.83–1.5 kW	66 dB(A)	15–18 kg
124 CFM	0.16 bar	−0.20 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **Single stage**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0180-1MT700-6	50	0.7	200-240 Δ / 345-415 Y	3.8 Δ / 2.2 Y	180 m³/h 106 CFM	−1.1 psi −0.07 bar	1.1 psi 0.07 bar	64	15
	60	0.83	220-275 Δ / 380-480 Y	3.75 Δ / 2.15 Y	210 m³/h 124 CFM	−0.73 psi −0.05 bar	0.73 psi 0.05 bar	66	
STRC0180-1MA800-1	50	0.8	230	5.2	180 m³/h 106 CFM	−1.5 psi −0.10 bar	1.6 psi 0.11 bar	64	16
	60	0.9	230	5.8	210 m³/h 124 CFM	−1.5 psi −0.10 bar	1.6 psi 0.11 bar	66	
STRC0180-1MT850-6	50	0.85	200-240 Δ / 345-415 Y	4.2 Δ / 2.4 Y	180 m³/h 106 CFM	−1.7 psi −0.12 bar	1.7 psi 0.12 bar	64	17
	60	0.95	220-275 Δ / 380-480 Y	4.0 Δ / 2.3 Y	210 m³/h 124 CFM	−1.3 psi −0.09 bar	1.0 psi 0.07 bar	66	
STRC0180-1MA111-1	50	1.1	230	7.3	180 m³/h 106 CFM	−2.2 psi −0.15 bar	2.0 psi 0.14 bar	64	17
	60	1.3	230	8.3	210 m³/h 124 CFM	−2.0 psi −0.14 bar	1.9 psi 0.13 bar	66	
STRC0180-1MT131-6	50	1.3	200-240 Δ / 345-415 Y	5.7 Δ / 3.3 Y	180 m³/h 106 CFM	−2.5 psi −0.17 bar	3.0 psi 0.21 bar	64	18
	60	1.5	220-275 Δ / 380-480 Y	5.7 Δ / 3.3 Y	210 m³/h 124 CFM	−2.9 psi −0.20 bar	2.3 psi 0.16 bar	66	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

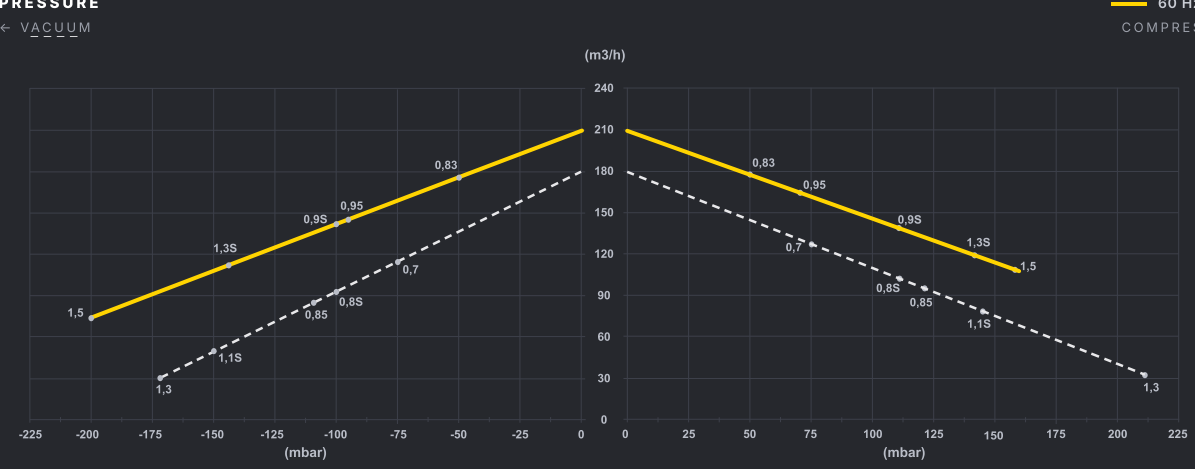

POWER VS PRESSURE

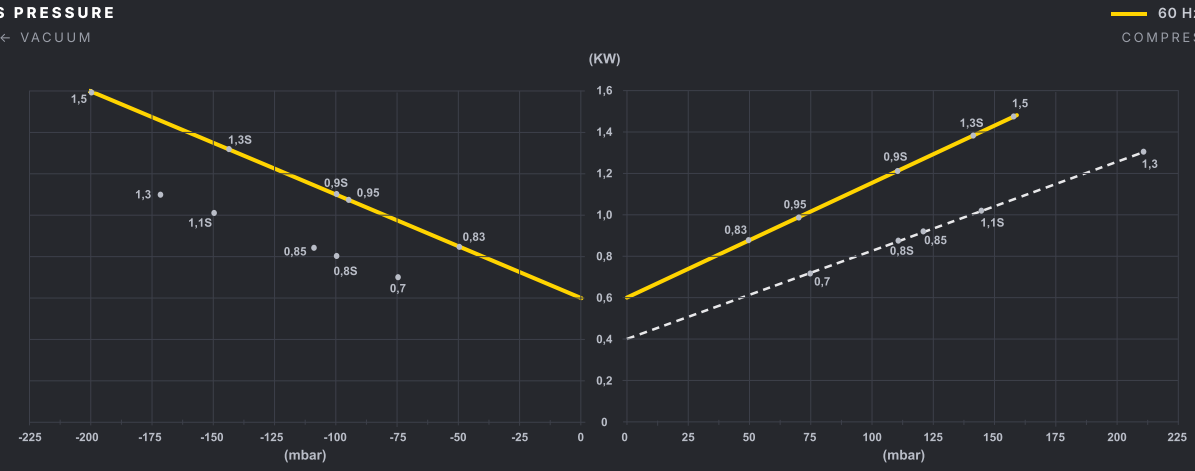

TEMPERATURE RISE VS PRESSURE

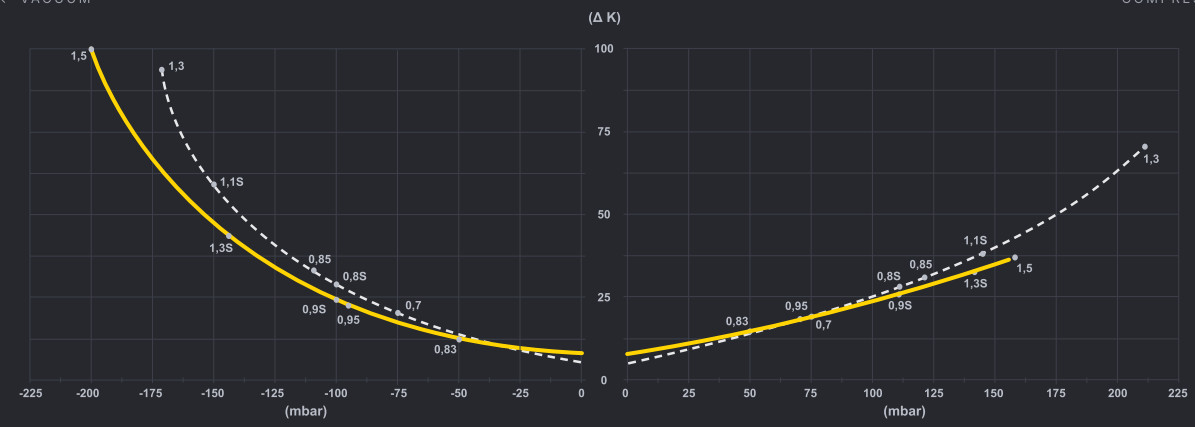


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

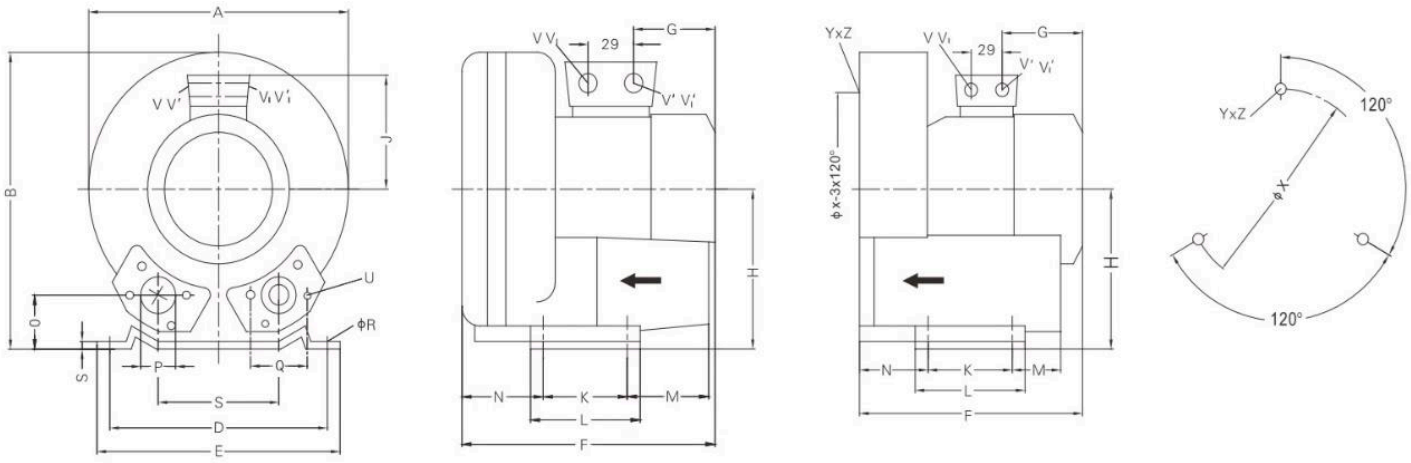

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P
STRC0180-1MT700-6	286	302	115	225	255	288	135	154	111	95	130	70	75	46	G 1 1/2"
STRC0180-1MA800-1	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"
STRC0180-1MT850-6	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"
STRC0180-1MA111-1	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"
STRC0180-1MT131-6	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"

Type	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX
STRC0180-1MT700-6	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0180-1MA800-1	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0180-1MT850-6	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0180-1MA111-1	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0180-1MT131-6	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved