REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

250 m³/h	4.2 psi	−3.8 psi	0.95–2.55 kW	70 dB(A)	20–25 kg
147 CFM	0.29 bar	−0.26 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **Single stage**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0210-1MT850-6	50	0.85	200-240 Δ / 345-415 Y	4.2 Δ / 2.4 Y	210 m³/h 124 CFM	−1.6 psi −0.11 bar	1.5 psi 0.10 bar	64	20
	60	0.95	220-275 Δ / 380-480 Y	4.0 Δ / 2.3 Y	250 m³/h 147 CFM	−1.2 psi −0.08 bar	1.0 psi 0.07 bar	70	
STRC0210-1MA111-1	50	1.1	230	7.3	210 m³/h 124 CFM	−2.3 psi −0.16 bar	2.3 psi 0.16 bar	64	21
	60	1.3	230	8.3	250 m³/h 147 CFM	−2.2 psi −0.15 bar	2.3 psi 0.16 bar	70	
STRC0210-1MT131-6	50	1.3	200-240 Δ / 345-415 Y	5.7 Δ / 3.3 Y	210 m³/h 124 CFM	−2.5 psi −0.17 bar	2.5 psi 0.17 bar	64	22
	60	1.5	220-275 Δ / 380-480 Y	5.7 Δ / 3.3 Y	250 m³/h 147 CFM	−2.2 psi −0.15 bar	2.0 psi 0.14 bar	70	
STRC0210-1MA151-1	50	1.5	230	9.5	210 m³/h 124 CFM	−2.8 psi −0.19 bar	2.8 psi 0.19 bar	64	24
	60	1.75	230	10	250 m³/h 147 CFM	−2.6 psi −0.18 bar	2.6 psi 0.18 bar	70	
STRC0210-1MT161-6	50	1.6	200-240 Δ / 345-415 Y	7.5 Δ / 4.3 Y	210 m³/h 124 CFM	−2.9 psi −0.20 bar	2.8 psi 0.19 bar	64	23
	60	2.05	220-275 Δ / 380-480 Y	7.6 Δ / 4.4 Y	250 m³/h 147 CFM	−3.2 psi −0.22 bar	3.0 psi 0.21 bar	70	
STRC0210-1MT221-6	50	2.2	200-240 Δ / 345-415 Y	9.7 Δ / 5.6 Y	210 m³/h 124 CFM	−3.2 psi −0.22 bar	3.9 psi 0.27 bar	64	25
	60	2.55	220-275 Δ / 380-480 Y	9.0 Δ / 5.3 Y	250 m³/h 147 CFM	−3.8 psi −0.26 bar	4.2 psi 0.29 bar	70	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

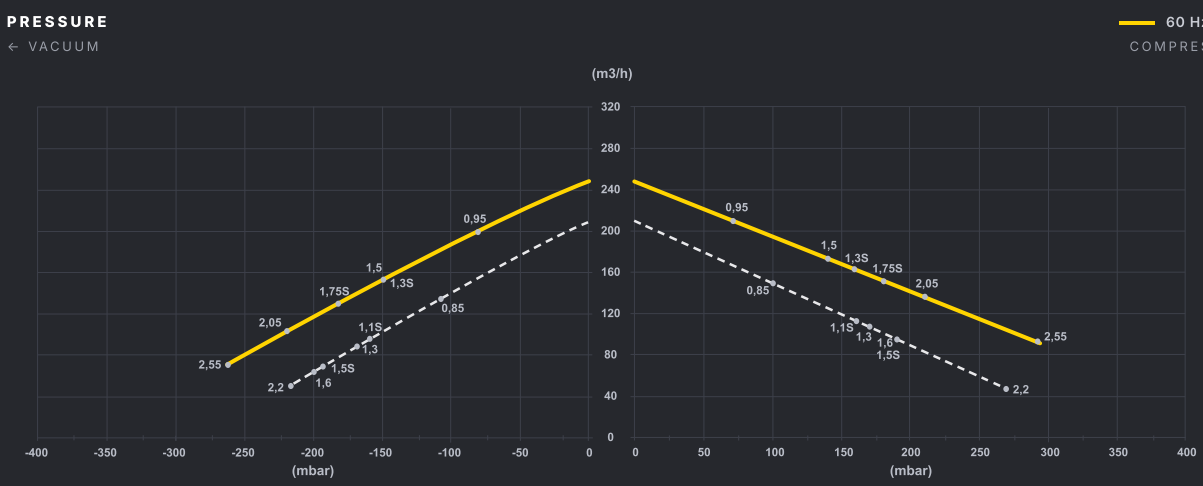

POWER VS PRESSURE

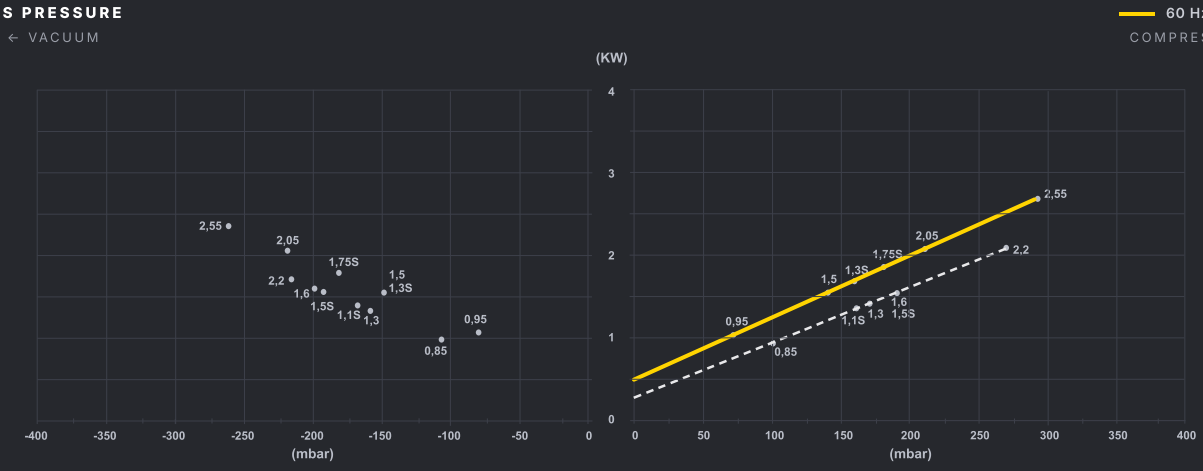

TEMPERATURE RISE VS PRESSURE

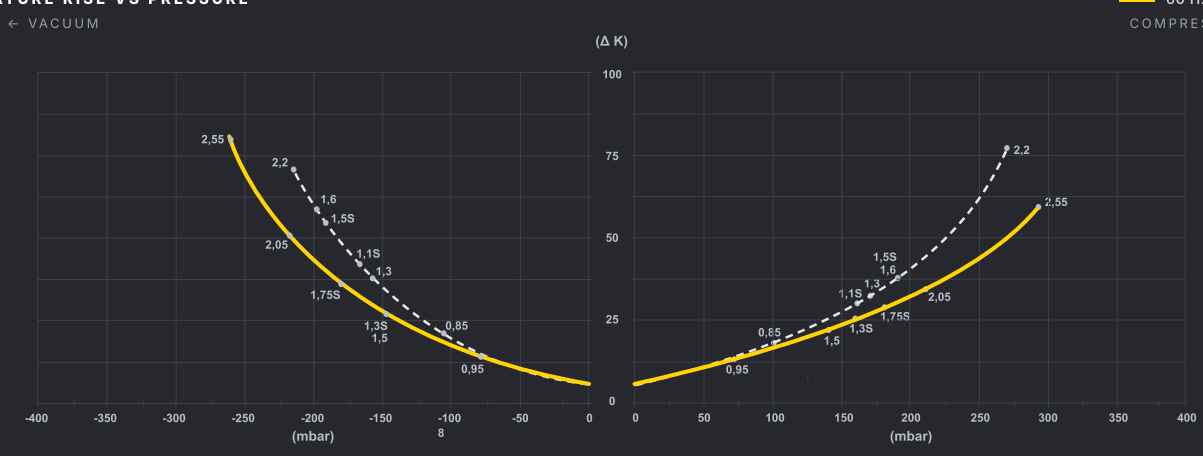


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

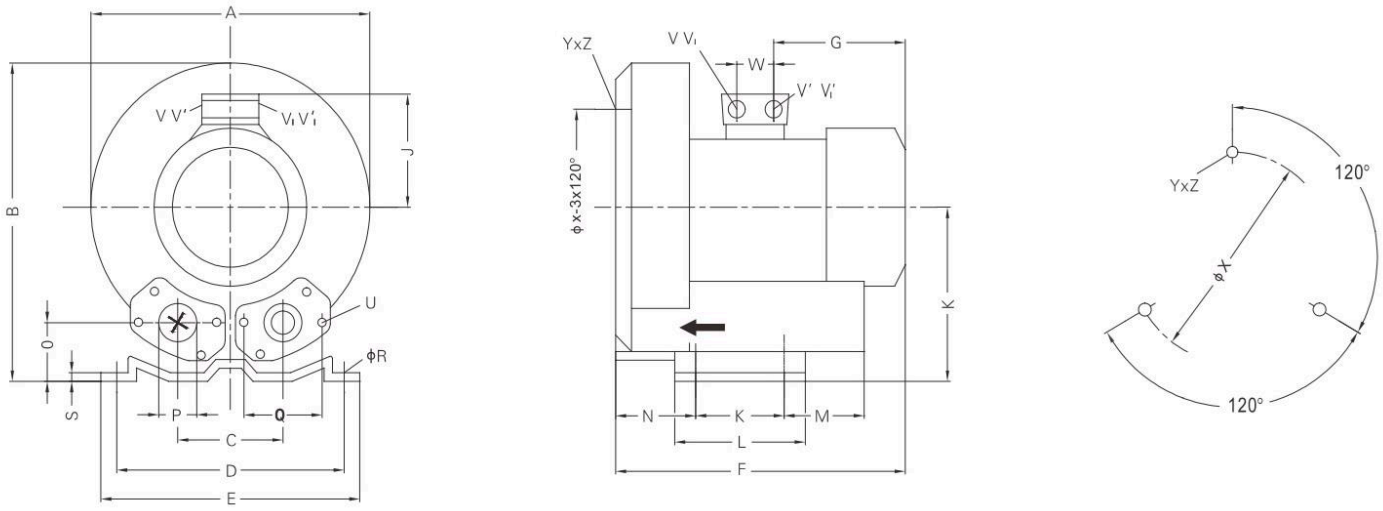

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX	W
STRC0210-1MT850-6	334	337	120	260	295	314	156	175	120	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MA111-1	334	337	120	260	295	314	156	175	120	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MT131-6	334	337	120	260	295	314	156	175	120	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MA151-1	334	337	120	260	295	345	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MT161-6	334	337	120	260	295	346	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MT221-6	334	337	120	260	295	346	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved