
REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.

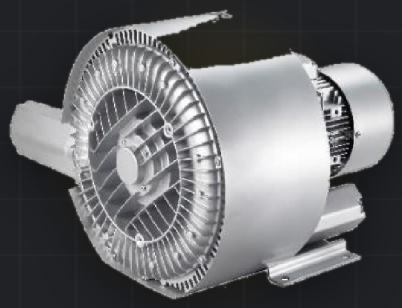

Vacuum or pressure · Continuous duty

275 m³/h	7.0 psi	−5.9 psi	3.45–4.6 kW	74 dB(A)	40–44 kg
162 CFM	0.48 bar	−0.41 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	COMPRESSION	USE	MOTOR
2 stages, series	Oil-free	Vacuum pump or compressor	50/60 Hz, class F, IP55
MOTOR PROTECTION	**VARIABLE SPEED**	**AMBIENT / INLET**	**MAX. ALTITUDE**
Thermal (bimetal), standard	Frequency converter allowed	−25 to 40 °C	1000 m

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0210-2ST301-6	50	3	200-240 Δ / 345-415 Y	12.5 Δ / 7.2 Y	230 m³/h 135 CFM	−4.9 psi −0.34 bar	5.9 psi 0.41 bar	72	40
	60	3.45	220-275 Δ / 380-480 Y	12.6 Δ / 7.3 Y	275 m³/h 162 CFM	−5.5 psi −0.38 bar	5.2 psi 0.36 bar	74	
STRC0210-2ST401-7	50	4	345-415 Δ / 600-720 Y	9.0 Δ / 5.2 Y	230 m³/h 135 CFM	−5.7 psi −0.39 bar	6.4 psi 0.44 bar	72	44
	60	4.6	380-480 Δ / 660-720 Y	9.0 Δ / 5.2 Y	275 m³/h 162 CFM	−5.9 psi −0.41 bar	7.0 psi 0.48 bar	74	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

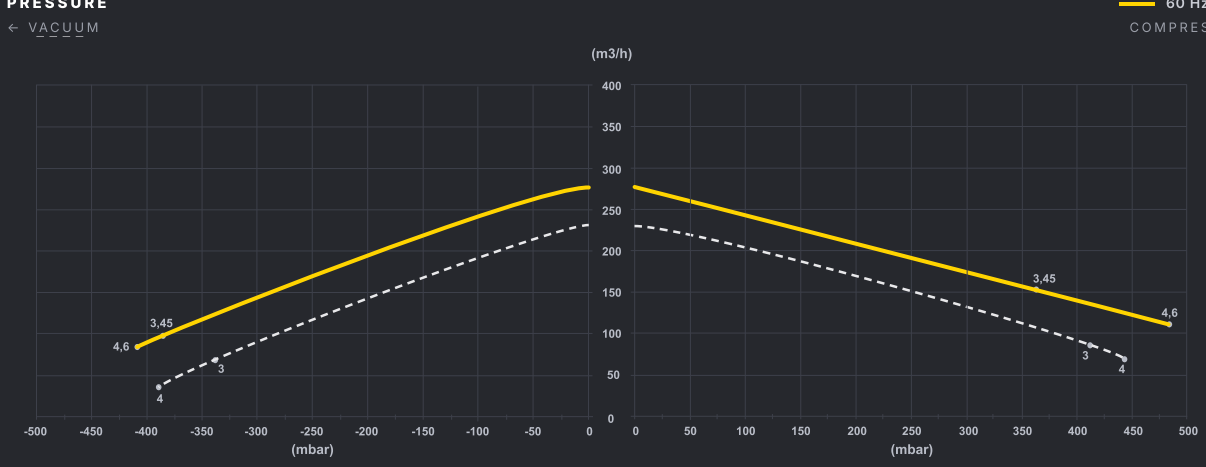

POWER VS PRESSURE

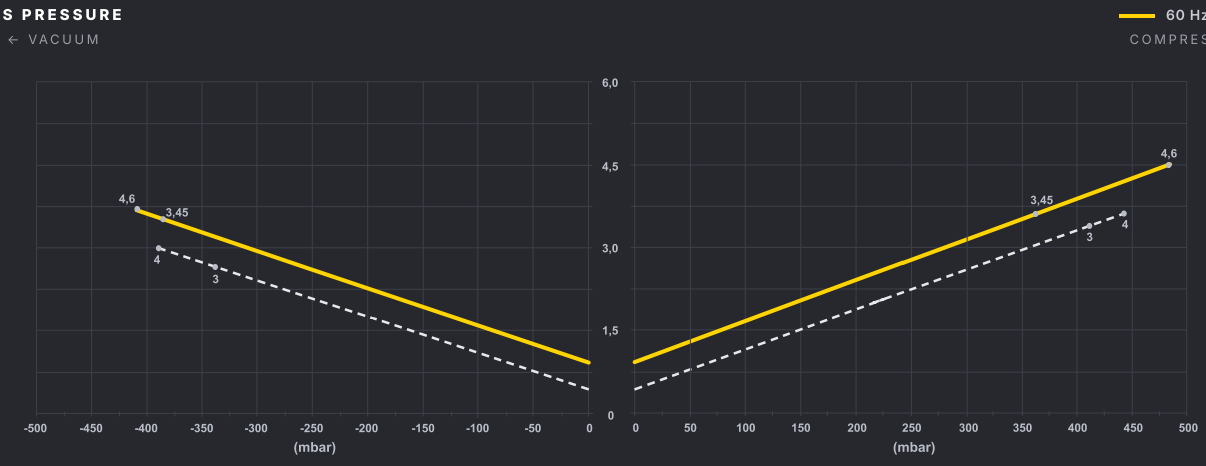

TEMPERATURE RISE VS PRESSURE

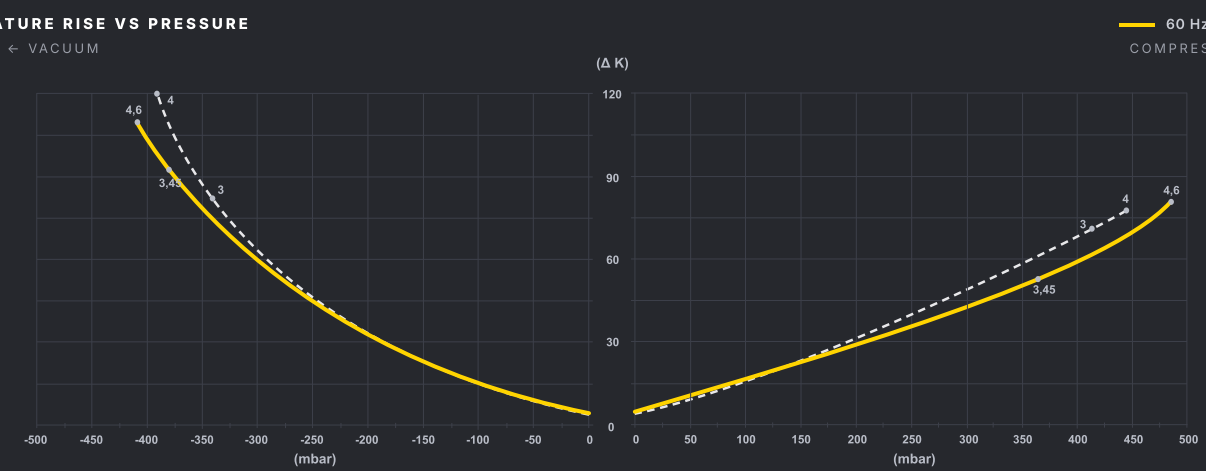


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

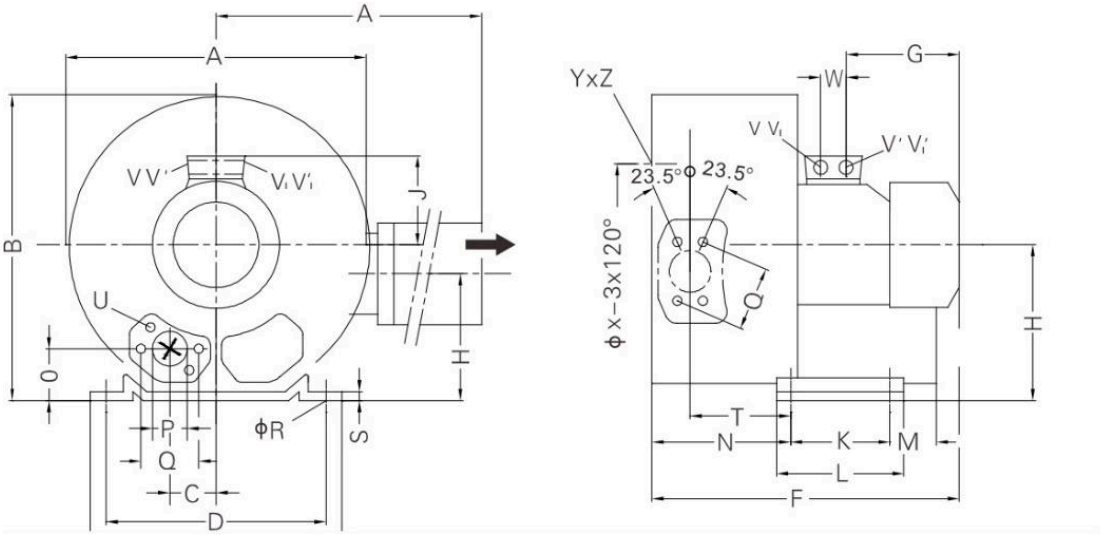

Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes
STRC0210-2ST301-6	372	411	371	60	260	295	465	190	175	144	135	115	155	98	171	48	G 2"	83	14	4	116	M8 × 17	M32 × 1.5	M32 × 1.5	200	M8 × 20	51.5°/171.5°/291.5°
STRC0210-2ST401-7	372	411	371	60	260	295	499	224	175	144	135	115	155	98	171	48	G 2"	83	14	4	116	M8 × 17	M32 × 1.5	M32 × 1.5	200	M8 × 20	51.5°/171.5°/291.5°

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved