REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

375 m³/h	4.5 psi	−4.6 psi	2.05–4.6 kW	72 dB(A)	27–40 kg
221 CFM	0.31 bar	−0.32 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **Single stage**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0315-1MT161-6	50	1.6	200-240 Δ / 345-415 Y	8.5 Δ / 4.9 Y	315 m³/h 185 CFM	−2.3 psi −0.16 bar	2.2 psi 0.15 bar	69	27
	60	2.05	220-275 Δ / 380-480 Y	8.8 Δ / 5.1 Y	375 m³/h 221 CFM	−2.3 psi −0.16 bar	2.2 psi 0.15 bar	72	
STRC0315-1MA221-1	50	2.2	230	12.8	315 m³/h 185 CFM	−2.8 psi −0.19 bar	2.8 psi 0.19 bar	69	30
	60	2.55	230	12.8	375 m³/h 221 CFM	−2.8 psi −0.19 bar	2.8 psi 0.19 bar	72	
STRC0315-1MT221-6	50	2.2	200-240 Δ / 345-415 Y	9.7 Δ / 5.6 Y	315 m³/h 185 CFM	−2.9 psi −0.20 bar	2.8 psi 0.19 bar	69	30
	60	2.55	220-275 Δ / 380-480 Y	10.3 Δ / 6.0 Y	375 m³/h 221 CFM	−2.8 psi −0.19 bar	2.8 psi 0.19 bar	72	
STRC0315-1MT301-6	50	3	200-240 Δ / 345-415 Y	12.5 Δ / 7.2 Y	315 m³/h 185 CFM	−3.8 psi −0.26 bar	3.9 psi 0.27 bar	69	36
	60	3.45	220-275 Δ / 380-480 Y	12.6 Δ / 7.3 Y	375 m³/h 221 CFM	−3.5 psi −0.24 bar	3.3 psi 0.23 bar	72	
STRC0315-1MT401-7	50	4	345-415 Δ / 600-720 Y	9.0 Δ / 5.2 Y	315 m³/h 185 CFM	−4.2 psi −0.29 bar	5.2 psi 0.36 bar	69	40
	60	4.6	380-480 Δ / 660-720 Y	9.0 Δ / 5.2 Y	375 m³/h 221 CFM	−4.6 psi −0.32 bar	4.5 psi 0.31 bar	72	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

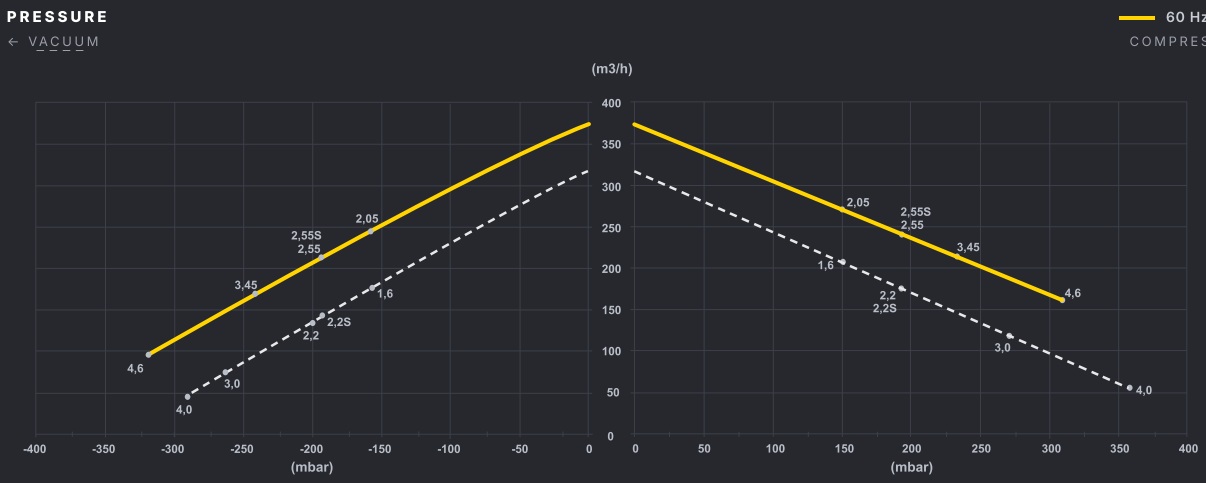

POWER VS PRESSURE

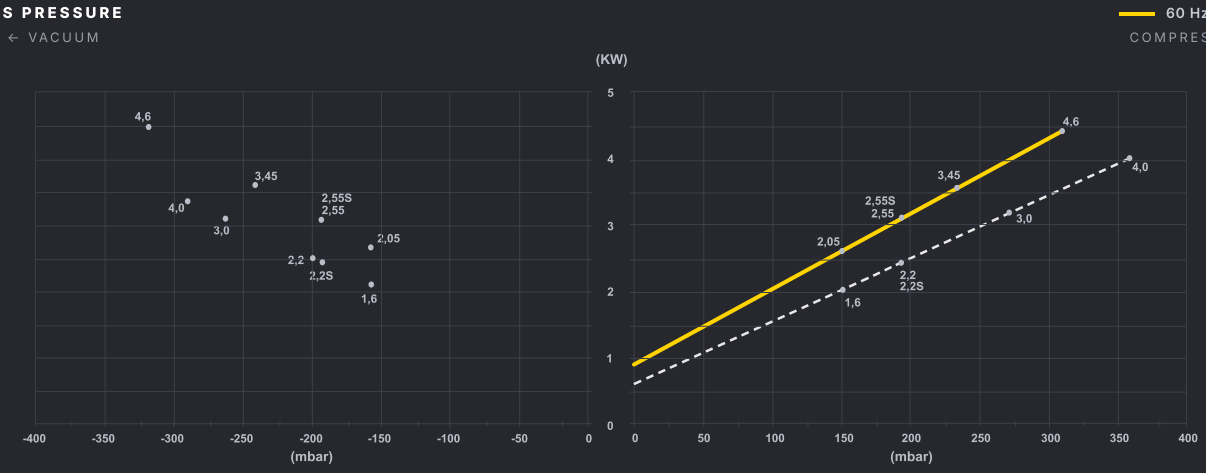

TEMPERATURE RISE VS PRESSURE

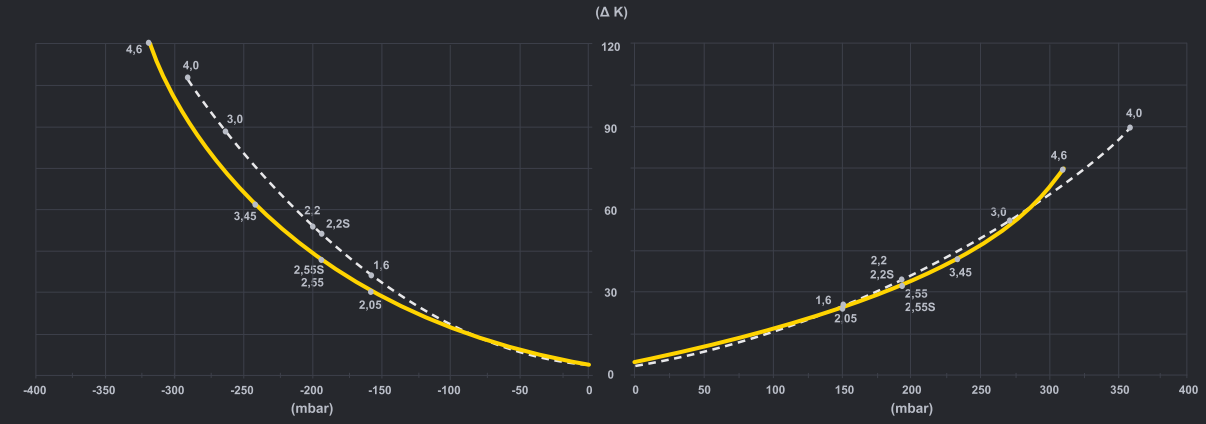


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

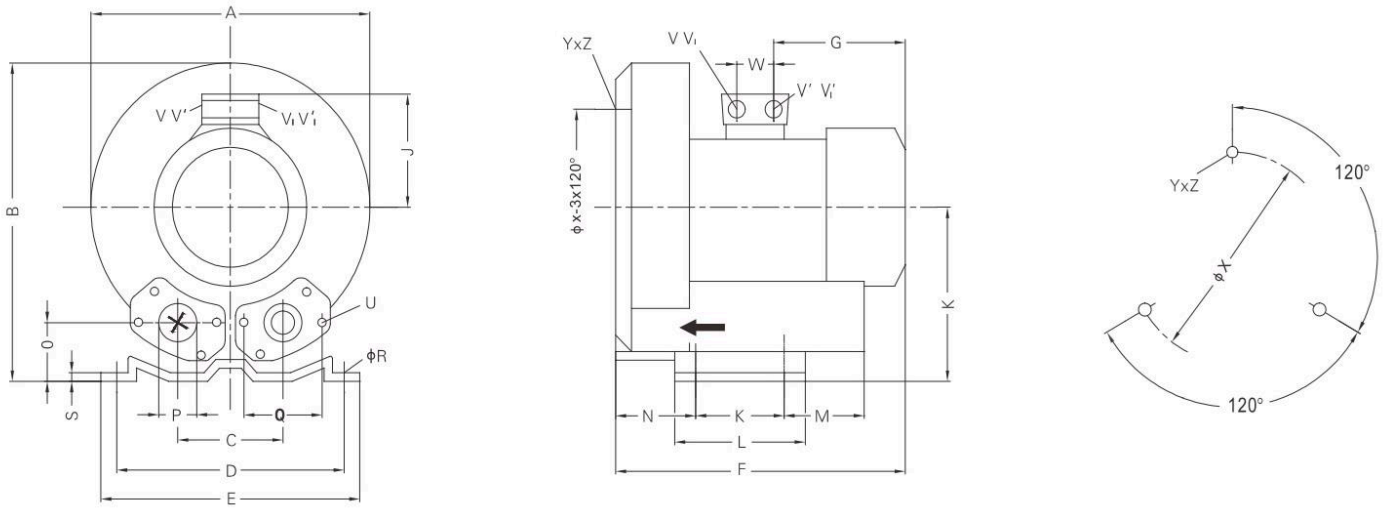

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX	W
STRC0315-1MT161-6	382	384	125	290	325	377	191	197	128	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M25 × 1.5	M6 × 1.5	M10 × 20	0/120°/240°	240	29
STRC0315-1MA221-1	382	384	125	290	325	404	218	197	128	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M25 × 1.5	M16 × 1.5	M10 × 20	0/120°/240°	240	29
STRC0315-1MT221-6	382	384	125	290	325	377	191	197	128	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M25 × 1.5	M6 × 1.5	M10 × 20	0/120°/240°	240	29
STRC0315-1MT301-6	382	384	125	290	325	409	188	197	135	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M32 × 1.5	M32 × 1.5	M10 × 20	0/120°/240°	240	42
STRC0315-1MT401-7	382	384	125	290	325	432	209	197	148	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M32 × 1.5	M32 × 1.5	M10 × 20	0/120°/240°	240	42

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved