REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.

Vacuum or pressure · Continuous duty



375 m³/h	9.4 psi	−6.4 psi	2.55–8.6 kW	76 dB(A)	43–73 kg
221 CFM	0.65 bar	−0.44 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	COMPRESSION	USE	MOTOR
2 stages, series	Oil-free	Vacuum pump or compressor	50/60 Hz, class F, IP55
MOTOR PROTECTION	**VARIABLE SPEED**	**AMBIENT / INLET**	**MAX. ALTITUDE**
Thermal (bimetal), standard	Frequency converter allowed	−25 to 40 °C	1000 m

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0315-2ST221-6	50	2.2	200-240 Δ / 345-415 Y	9.7 Δ / 5.6 Y	315 m³/h 185 CFM	−3.2 psi −0.22 bar	3.0 psi 0.21 bar	73	43
	60	2.55	220-275 Δ / 380-480 Y	10.3 Δ / 6.0 Y	375 m³/h 221 CFM	−2.5 psi −0.17 bar	2.2 psi 0.15 bar	76	
STRC0315-2ST301-6	50	3	200-240 Δ / 345-415 Y	12.5 Δ / 7.2 Y	315 m³/h 185 CFM	−4.1 psi −0.28 bar	3.8 psi 0.26 bar	73	48
	60	3.45	220-275 Δ / 380-480 Y	12.6 Δ / 7.3 Y	375 m³/h 221 CFM	−3.3 psi −0.23 bar	2.9 psi 0.20 bar	76	
STRC0315-2ST431-7	50	4.3	345-415 Δ / 600-720 Y	10.0 Δ / 5.2 Y	315 m³/h 185 CFM	−5.2 psi −0.36 bar	5.2 psi 0.36 bar	73	54
	60	4.8	380-480 Δ / 660-720 Y	10.4 Δ / 6.0 Y	375 m³/h 221 CFM	−4.6 psi −0.32 bar	4.8 psi 0.33 bar	76	
STRC0315-2ST551-7	50	5.5	345-415 Δ / 600-720 Y	13.3 Δ / 7.7 Y	315 m³/h 185 CFM	−6.1 psi −0.42 bar	7.3 psi 0.50 bar	73	66
	60	6.3	380-480 Δ / 660-720 Y	13.3 Δ / 7.7 Y	375 m³/h 221 CFM	−6.4 psi −0.44 bar	5.9 psi 0.41 bar	76	
STRC0315-2ST751-7	50	7.5	345-415 Δ / 600-720 Y	16.7 Δ / 9.6 Y	315 m³/h 185 CFM	−6.1 psi −0.42 bar	8.7 psi 0.60 bar	73	73
	60	8.6	380-480 Δ / 660-720 Y	17.3 Δ / 10.0 Y	375 m³/h 221 CFM	−6.4 psi −0.44 bar	9.4 psi 0.65 bar	76	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

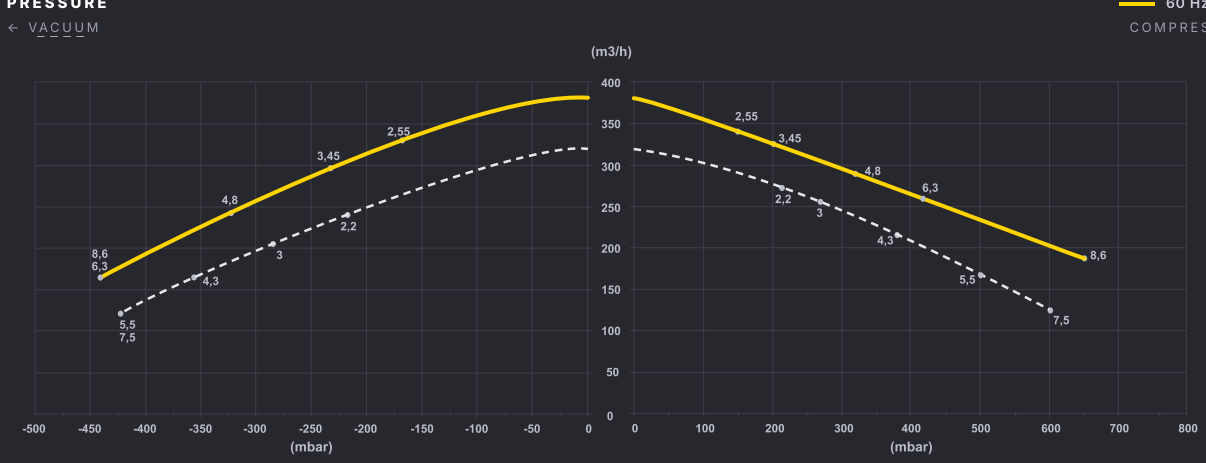

POWER VS PRESSURE

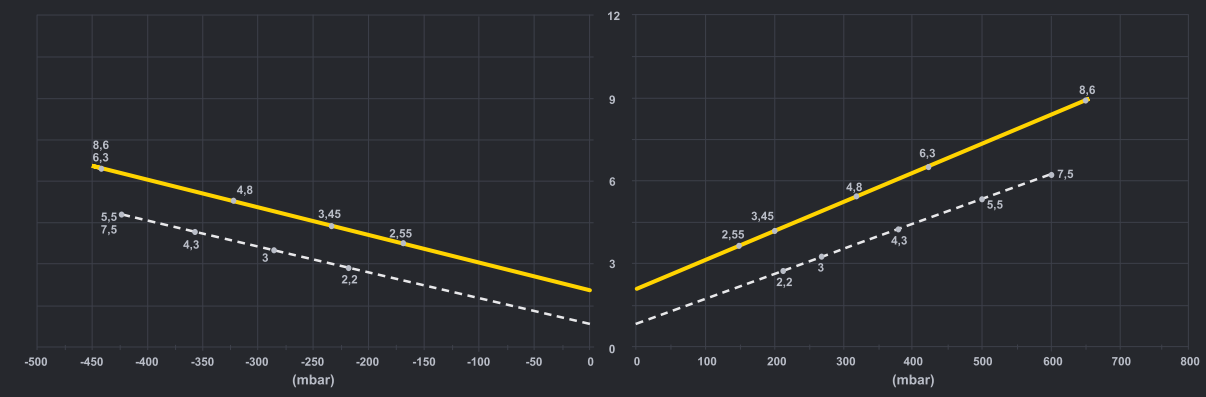

TEMPERATURE RISE VS PRESSURE

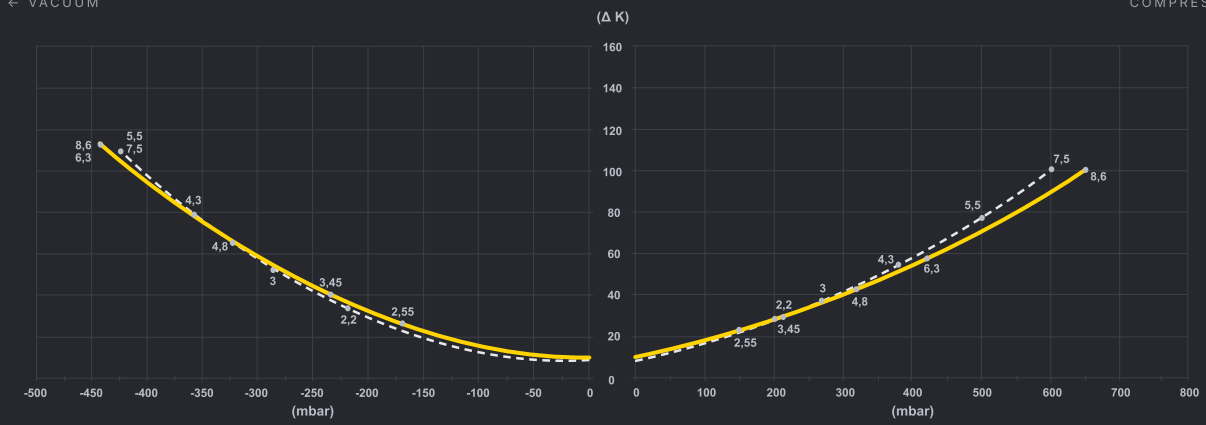


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

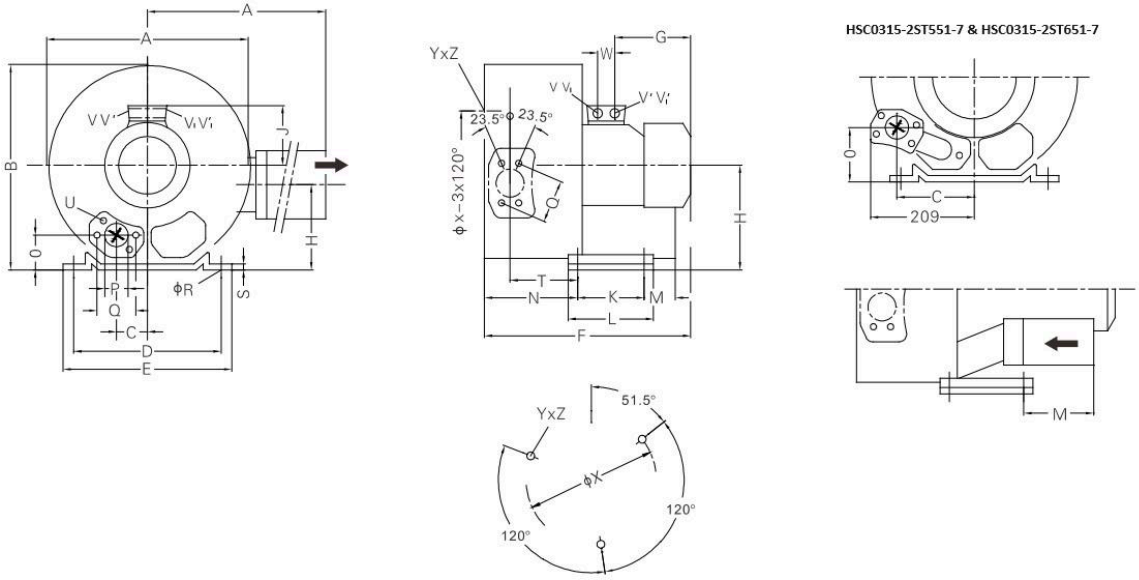

Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes	W
STRC0315-2ST221-6	426	426	420	63	290	325	473	185	197	162	128	140	180	84	205	53	G 2"	83	15	4.5	130	M8 × 17	M25 × 1.5	M16 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	29
STRC0315-2ST301-6	426	426	420	63	290	325	507	180	197	162	135	140	180	84	205	53	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42
STRC0315-2ST431-7	426	426	420	63	290	325	526	209	197	162	148	140	180	84	205	53	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42
STRC0315-2ST551-7	426	426	420	154	290	325	571	226	197	162	167	140	180	225	205	94	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42
STRC0315-2ST751-7	426	426	420	154	290	325	571	226	197	162	167	140	180	225	205	94	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved