REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

500 m³/h	4.1 psi	−3.8 psi	2.05–4.6 kW	72 dB(A)	29–43 kg
294 CFM	0.28 bar	−0.26 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **Single stage**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0415-1MT161-6	50	1.6	200-240 Δ / 345-415 Y	8.5 Δ / 4.9 Y	415 m³/h 244 CFM	−1.5 psi −0.10 bar	1.5 psi 0.10 bar	69	29
	60	2.05	220-275 Δ / 380-480 Y	8.8 Δ / 5.1 Y	500 m³/h 294 CFM	−1.3 psi −0.09 bar	1.2 psi 0.08 bar	72	
STRC0415-1MT221-6	50	2.2	200-240 Δ / 345-415 Y	9.7 Δ / 5.6 Y	415 m³/h 244 CFM	−2.5 psi −0.17 bar	2.5 psi 0.17 bar	69	32
	60	2.55	220-275 Δ / 380-480 Y	10.3 Δ / 6.0 Y	500 m³/h 294 CFM	−2.3 psi −0.16 bar	1.7 psi 0.12 bar	72	
STRC0415-1MT301-6	50	3	200-240 Δ / 345-415 Y	12.5 Δ / 7.2 Y	415 m³/h 244 CFM	−3.2 psi −0.22 bar	3.2 psi 0.22 bar	69	37
	60	3.45	220-275 Δ / 380-480 Y	12.6 Δ / 7.3 Y	500 m³/h 294 CFM	−2.9 psi −0.20 bar	2.8 psi 0.19 bar	72	
STRC0415-1MT401-7	50	4	345-415 Δ / 600-720 Y	9.0 Δ / 5.2 Y	415 m³/h 244 CFM	−3.8 psi −0.26 bar	4.5 psi 0.31 bar	69	43
	60	4.6	380-480 Δ / 660-720 Y	9.0 Δ / 5.2 Y	500 m³/h 294 CFM	−3.8 psi −0.26 bar	4.1 psi 0.28 bar	72	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

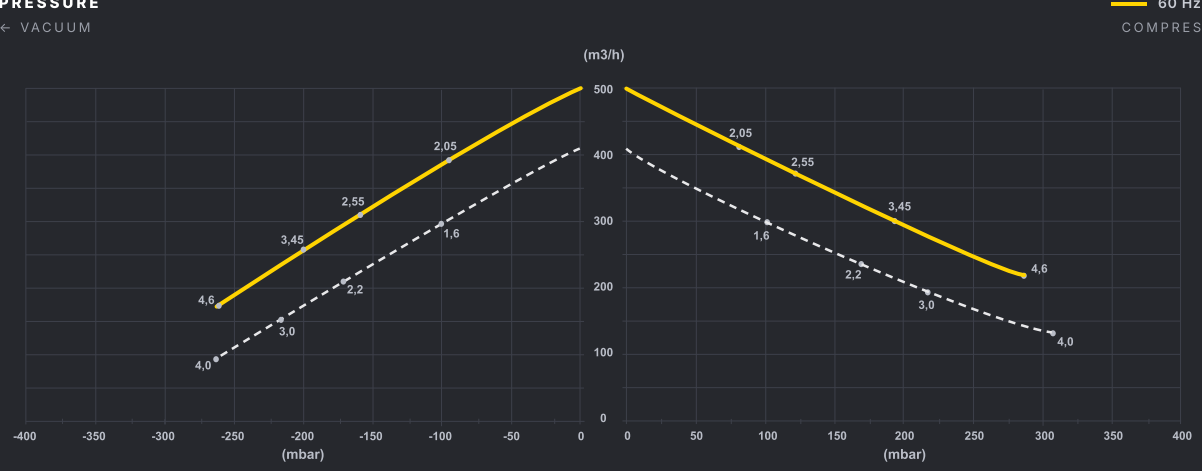

POWER VS PRESSURE

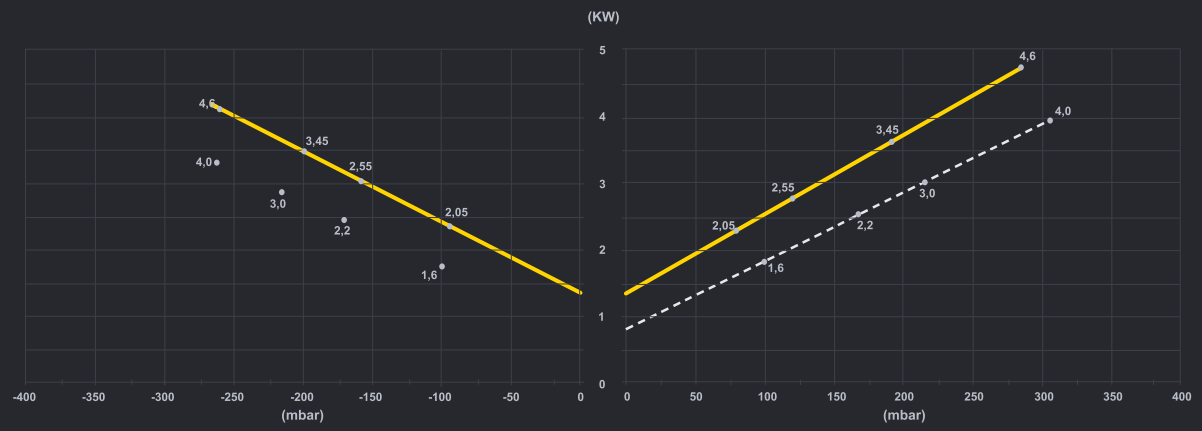

TEMPERATURE RISE VS PRESSURE

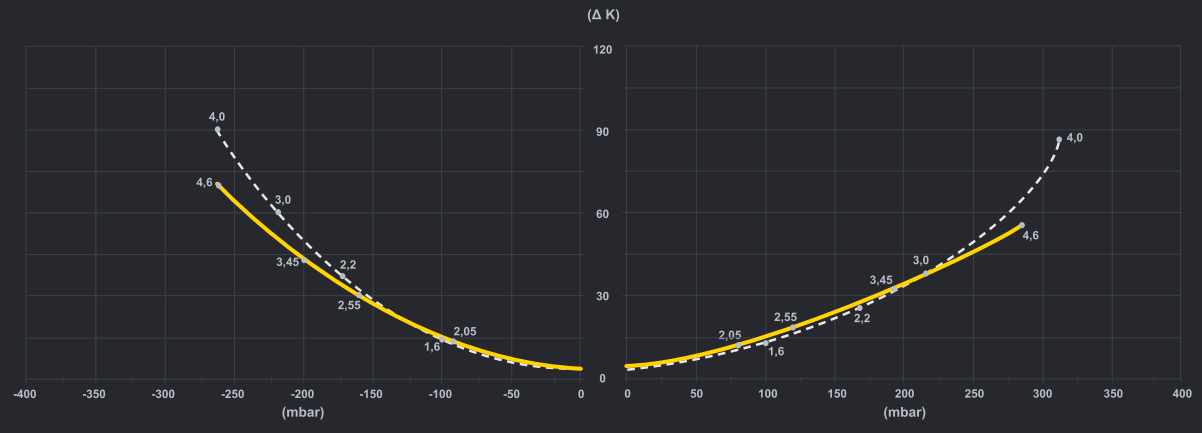


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

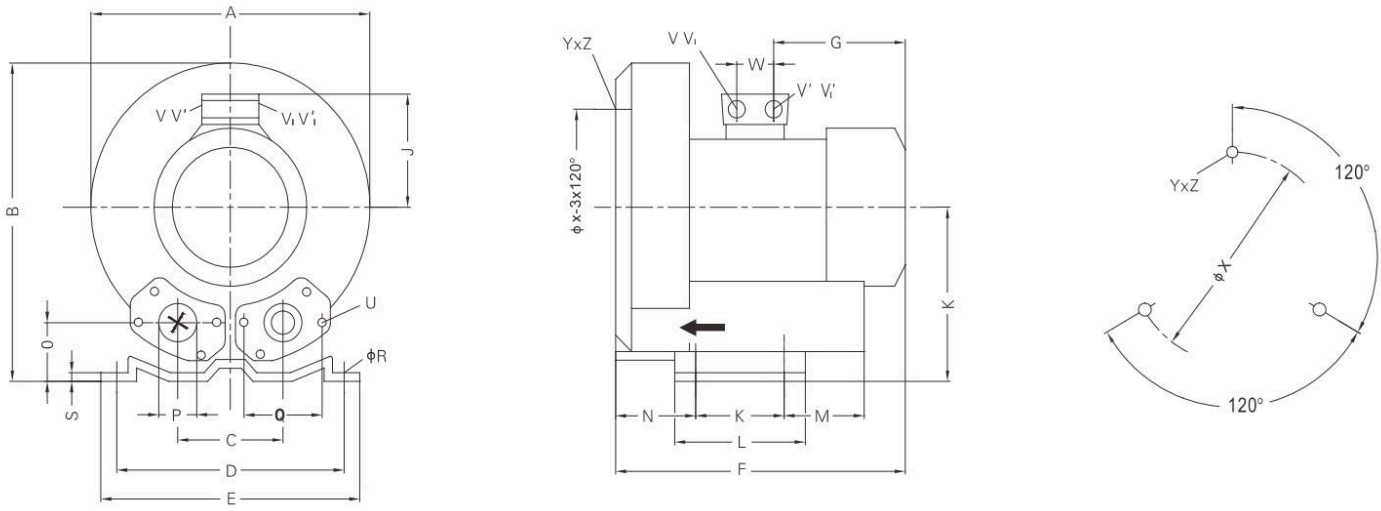

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX	W
STRC0415-1MT161-6	382	384	125	290	325	387	191	197	128	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M25 × 1.5	M6 × 1.5	M10 × 20	0/120°/240°	240	29
STRC0415-1MT221-6	382	384	125	290	325	387	189	197	128	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M25 × 1.5	M16 × 1.5	M10 × 20	0/120°/240°	240	29
STRC0415-1MT301-6	382	384	125	290	325	419	189	197	128	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M25 × 1.5	M6 × 1.5	M10 × 20	0/120°/240°	240	29
STRC0415-1MT401-7	382	384	125	290	325	432	209	197	135	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M32 × 1.5	M32 × 1.5	M10 × 20	0/120°/240°	240	42

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved