REGENERATIVE BLOWER · 2 STAGES IN PARALLEL

Double-flow regenerative blower.

Two impellers in parallel for twice the flow. Oil-free, direct-driven.

Vacuum or pressure · Continuous duty



595 m³/h	4.4 psi	−3.9 psi	4.6–8.6 kW	78 dB(A)	54–75 kg
350 CFM	0.30 bar	−0.27 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **2 stages, parallel**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS

TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0495-2PT401-7	50	4	345-415 Δ / 600-720 Y	9.0 Δ / 5.2 Y	495 m³/h 291 CFM	−2.2 psi −0.15 bar	2.0 psi 0.14 bar	74	54
	60	4.6	380-480 Δ / 660-720 Y	9.0 Δ / 5.2 Y	595 m³/h 350 CFM	−1.5 psi −0.10 bar	1.3 psi 0.09 bar	78	
STRC0495-2PT551-7	50	5.5	345-415 Δ / 600-720 Y	13.3 Δ / 7.7 Y	494 m³/h 291 CFM	−3.5 psi −0.24 bar	3.8 psi 0.26 bar	74	69
	60	6.3	380-480 Δ / 660-720 Y	13.3 Δ / 7.7 Y	595 m³/h 350 CFM	−3.0 psi −0.21 bar	2.9 psi 0.20 bar	78	
STRC0495-2PT751-7	50	7.5	345-415 Δ / 600-720 Y	16.7 Δ / 9.6 Y	494 m³/h 291 CFM	−3.5 psi −0.24 bar	4.6 psi 0.32 bar	74	75
	60	8.6	380-480 Δ / 660-720 Y	17.3 Δ / 10.0 Y	595 m³/h 350 CFM	−3.9 psi −0.27 bar	4.4 psi 0.30 bar	78	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.

FLOW VS PRESSURE

← VACUUM COMPRESSION →


60 Hz ---- 50 Hz

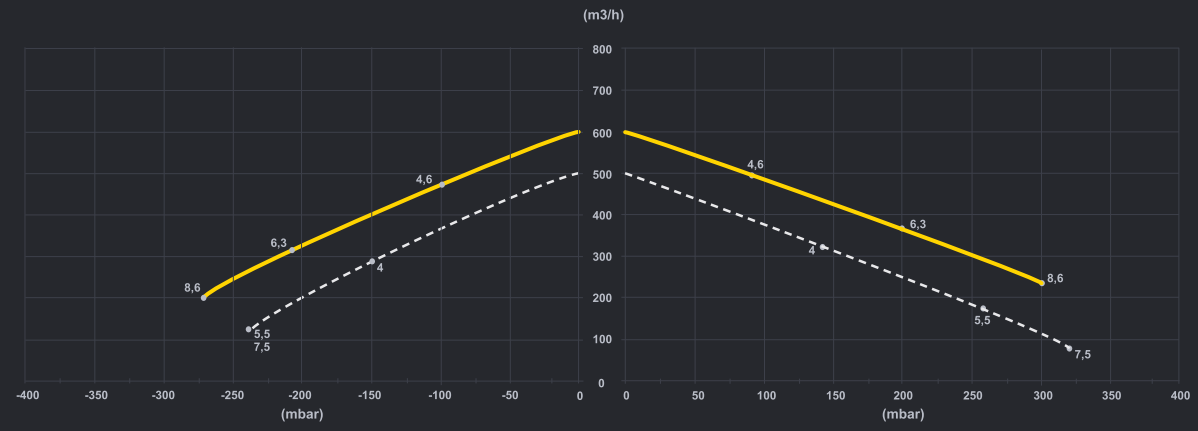

POWER VS PRESSURE

← VACUUM COMPRESSION →


60 Hz ---- 50 Hz

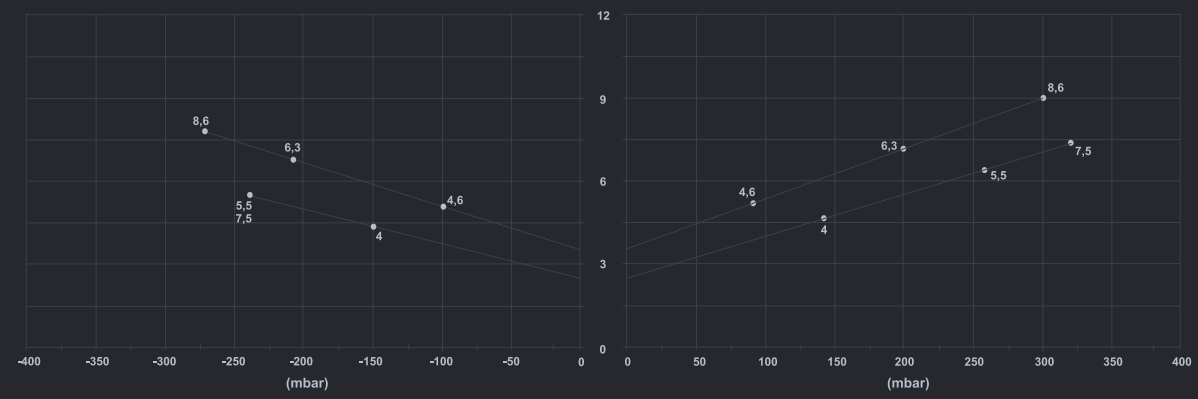

TEMPERATURE RISE VS PRESSURE

← VACUUM COMPRESSION →

60 Hz ---- 50 Hz

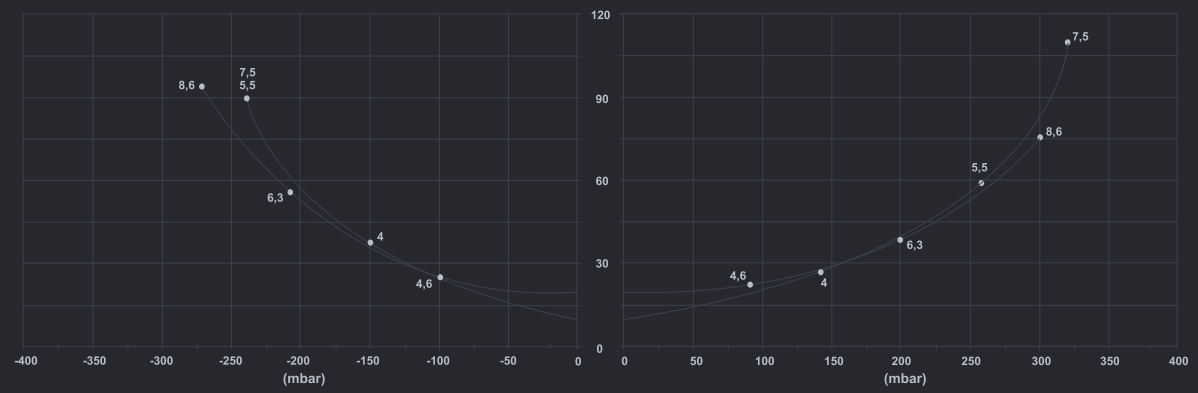


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

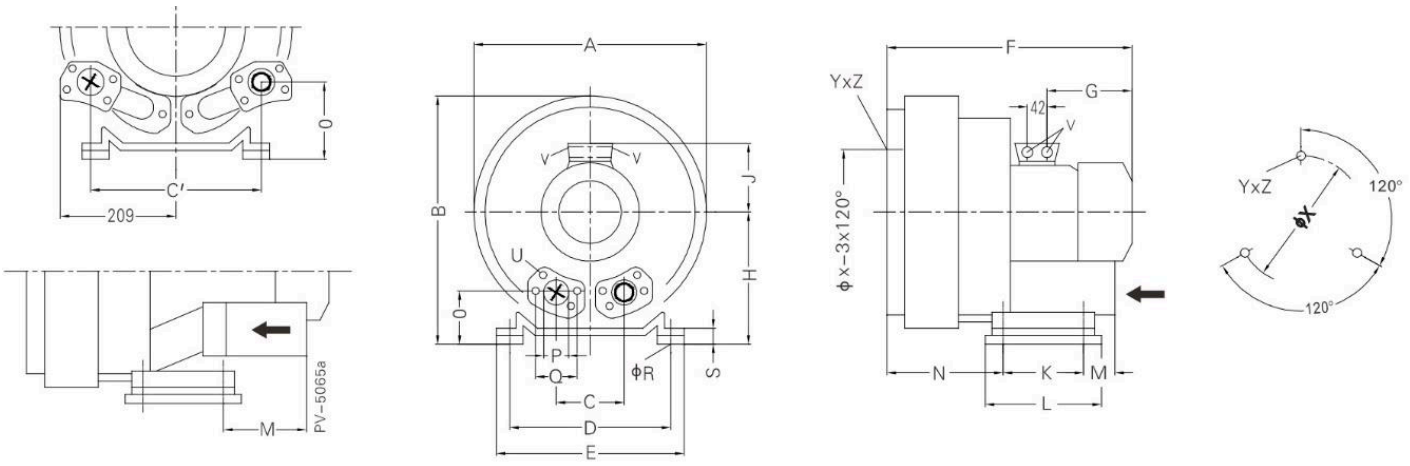

Type	A	B	C	C'	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	ϕX	YxZ	X-Holes
STRC0495-2PT401-7	420	468	125	-	290	325	526	209	257	148	140	180	84	205	114	G 2"	83	15	64.5	M8 × 17	4 x M32 × 1.5	240	M10 × 06	0/120°/240°
STRC0495-2PT551-7	420	468	-	308	290	325	571	226	257	148	140	180	225	205	114	G 2"	83	15	64.5	M8 × 17	4 x M32 × 1.5	240	M10 × 06	0/120°/240°
STRC0495-2PT751-7	420	468	-	308	290	325	571	226	257	148	140	180	225	205	114	G 2"	83	15	64.5	M8 × 17	4 x M32 × 1.5	240	M10 × 06	0/120°/240°

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved