
REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.

Vacuum or pressure · Continuous duty

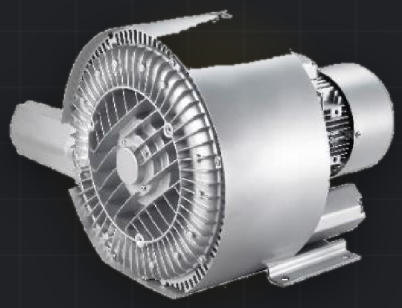

620 m³/h	10.9 psi	−7.1 psi	6.3–17.3 kW	78 dB(A)	83–120 kg
365 CFM	0.75 bar	−0.49 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	COMPRESSION	USE	MOTOR
2 stages, series	Oil-free	Vacuum pump or compressor	50/60 Hz, class F, IP55
MOTOR PROTECTION	**VARIABLE SPEED**	**AMBIENT / INLET**	**MAX. ALTITUDE**
Thermal (bimetal), standard	Frequency converter allowed	−25 to 40 °C	1000 m

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0530-2ST551-7	50	5.5	345-415 Δ / 600-720 Y	13.3 Δ / 7.7 Y	530 m³/h 312 CFM	−3.5 psi −0.24 bar	3.5 psi 0.24 bar	74	83
	60	6.3	380-480 Δ / 660-720 Y	13.3 Δ / 7.7 Y	620 m³/h 365 CFM	−2.5 psi −0.17 bar	2.3 psi 0.16 bar	78	
STRC0530-2ST751-7	50	7.5	345-415 Δ / 600-720 Y	16.7 Δ / 9.6 Y	530 m³/h 312 CFM	−5.8 psi −0.40 bar	5.8 psi 0.40 bar	74	86
	60	8.6	380-480 Δ / 660-720 Y	17.3 Δ / 10.0 Y	620 m³/h 365 CFM	−5.2 psi −0.36 bar	4.6 psi 0.32 bar	78	
STRC0530-2ST112-7	50	11	345-415 Δ / 600-720 Y	28.0 Δ / 16.2 Y	530 m³/h 312 CFM	−6.2 psi −0.43 bar	8.7 psi 0.60 bar	74	104
	60	12.6	380-480 Δ / 660-720 Y	29.0 Δ / 16.7 Y	620 m³/h 365 CFM	−6.7 psi −0.46 bar	8.7 psi 0.60 bar	78	
STRC0530-2ST152-7	50	15	345-415 Δ / 600-720 Y	32.5 Δ / 18.8 Y	530 m³/h 312 CFM	−6.7 psi −0.46 bar	9.7 psi 0.67 bar	74	120
	60	17.3	380-480 Δ / 660-720 Y	34.5 Δ / 19.9 Y	620 m³/h 365 CFM	−7.1 psi −0.49 bar	10.9 psi 0.75 bar	78	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

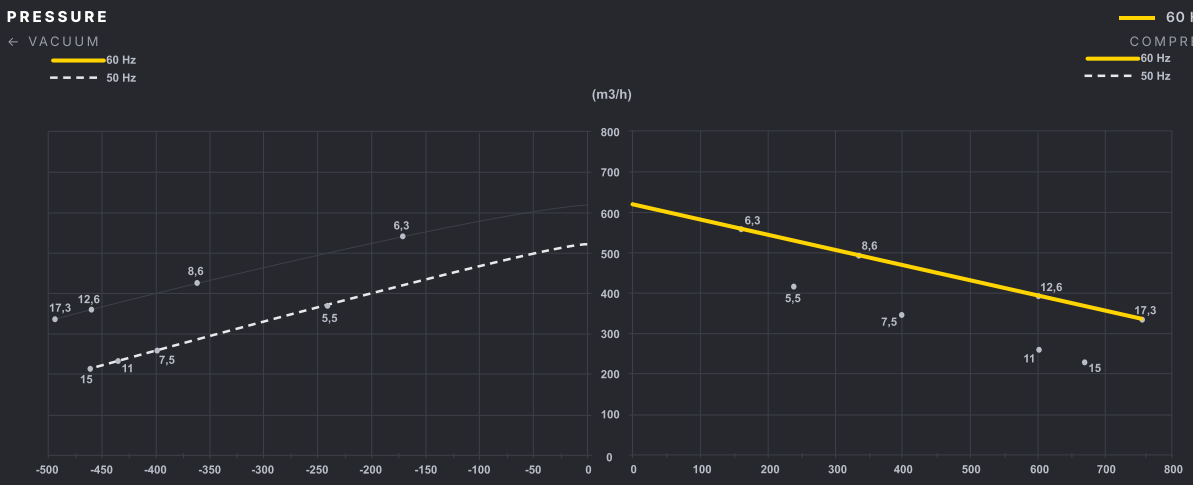

POWER VS PRESSURE

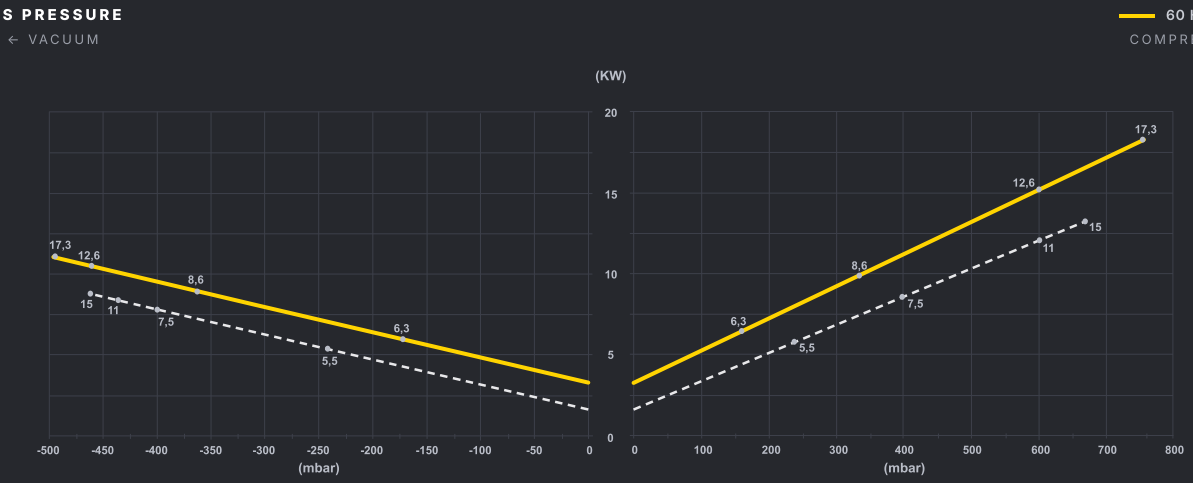

TEMPERATURE RISE VS PRESSURE

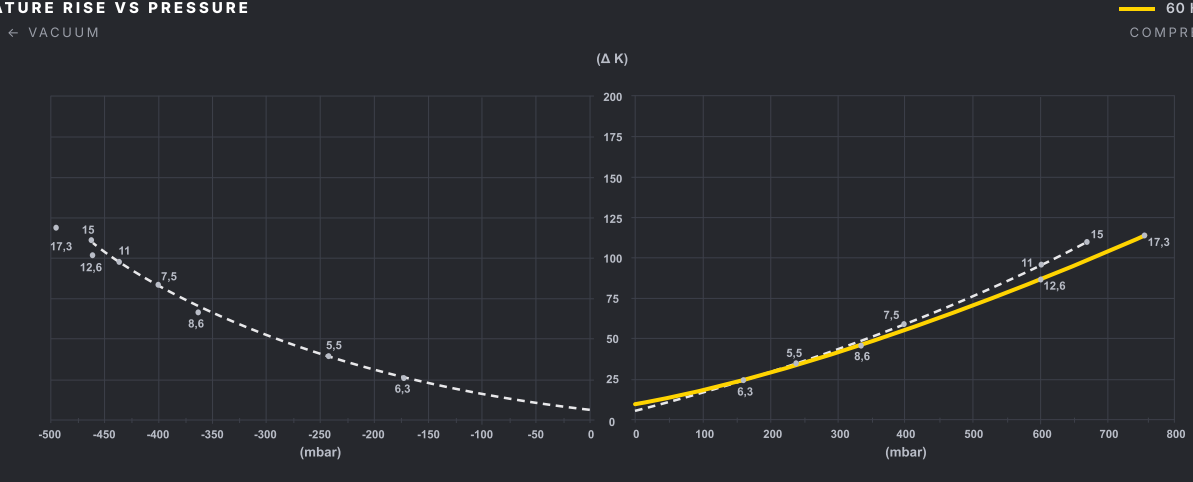


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.


DIMENSIONS

All dimensions in mm

HSC0530-2ST551-7 & HSC0530-2ST751-7

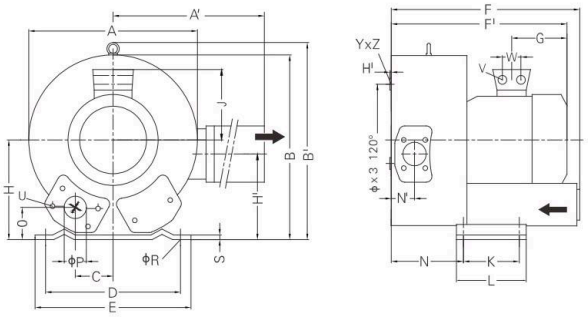

HSC0530-2ST112-7 & HSC0530-2ST152-7

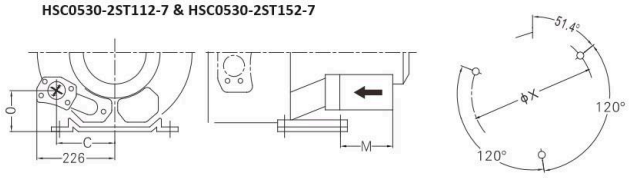

Type	A	A'	B	B'	C	D	E	F	F'	G	H	H'	J	K	L	M	N	N'	O	P	ϕR	S	V	W	ϕX	Y_Z	X-Holes
STRC0530-2ST551-7	500	549	490	509	-	356	545	545	589	247	240	199	148	170	217	140	236	84	65	G 2 1/2"	15	6 4	x M32 × 1.5	42	286	M12 × 20	58.5°/171.5°/291.5°
STRC0530-2ST751-7	500	549	490	509	-	356	545	545	589	247	240	199	167	170	217	140	236	84	65	G 2 1/2"	15	6 4	x M32 × 1.5	42	286	M12 × 20	58.5°/171.5°/291.5°
STRC0530-2ST112-7	500	549	490	509	-	356	545	717	694	318	240	199	197	170	217	312	212	84	105	G 2 1/2"	15	6 4	x M32 × 1.5	54	286	M12 × 20	58.5°/171.5°/291.5°
STRC0530-2ST152-7	500	549	490	509	152	356	545	717	694	318	240	199	197	170	217	312	212	84	105	G 2 1/2"	15	6 4	x M32 × 1.5	54	286	M12 × 20	58.5°/171.5°/291.5°

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved