REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

840 m³/h	3.8 psi	−3.9 psi	4.6–8.6 kW	74 dB(A)	57–69 kg
494 CFM	0.26 bar	−0.27 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **Single stage**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0700-1MT401-7	50	4	345-415 Δ / 600-720 Y	9.5 Δ / 5.5 Y	700 m³/h 412 CFM	−2.2 psi −0.15 bar	2.0 psi 0.14 bar	70	57
	60	4.6	380-480 Δ / 660-720 Y	9.5 Δ / 5.5 Y	840 m³/h 494 CFM	−1.3 psi −0.09 bar	1.3 psi 0.09 bar	74	
STRC0700-1MT551-7	50	5.5	345-415 Δ / 600-720 Y	13.3 Δ / 7.7 Y	700 m³/h 412 CFM	−2.9 psi −0.20 bar	2.6 psi 0.18 bar	70	66
	60	6.3	380-480 Δ / 660-720 Y	13.3 Δ / 7.7 Y	840 m³/h 494 CFM	−2.6 psi −0.18 bar	2.6 psi 0.18 bar	74	
STRC0700-1MT751-7	50	7.5	345-415 Δ / 600-720 Y	16.7 Δ / 9.6 Y	700 m³/h 412 CFM	−3.9 psi −0.27 bar	3.8 psi 0.26 bar	70	69
	60	8.6	380-480 Δ / 660-720 Y	17.3 Δ / 10.0 Y	840 m³/h 494 CFM	−3.9 psi −0.27 bar	3.8 psi 0.26 bar	74	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

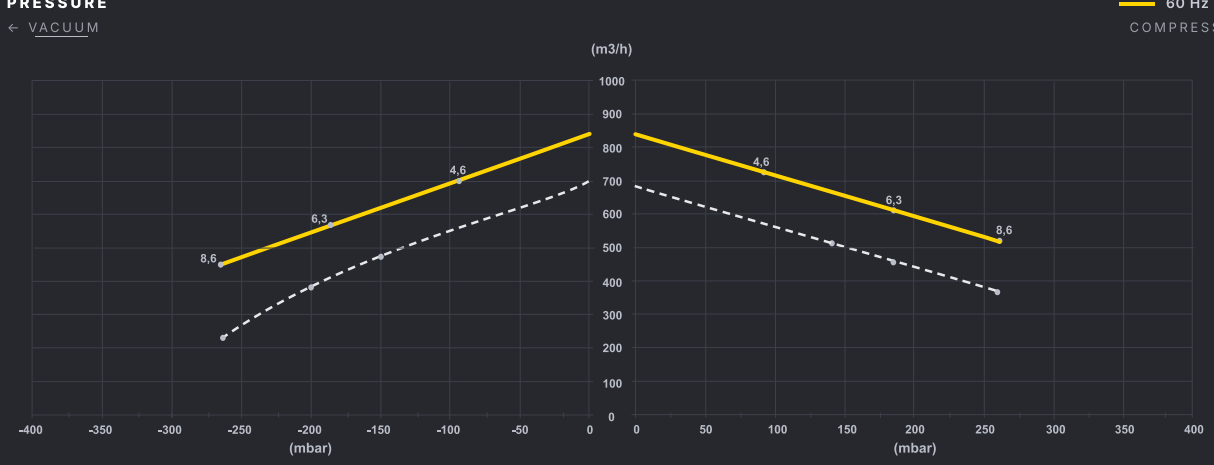

POWER VS PRESSURE

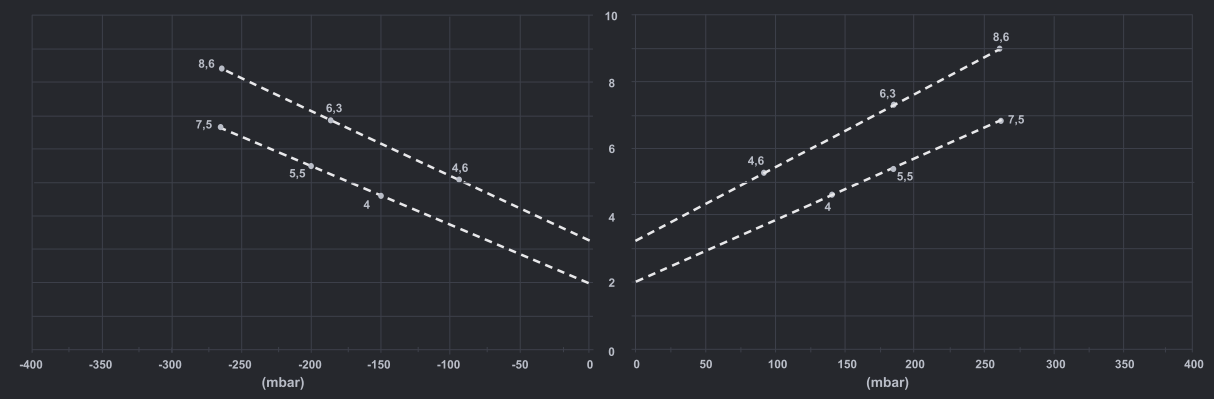

TEMPERATURE RISE VS PRESSURE

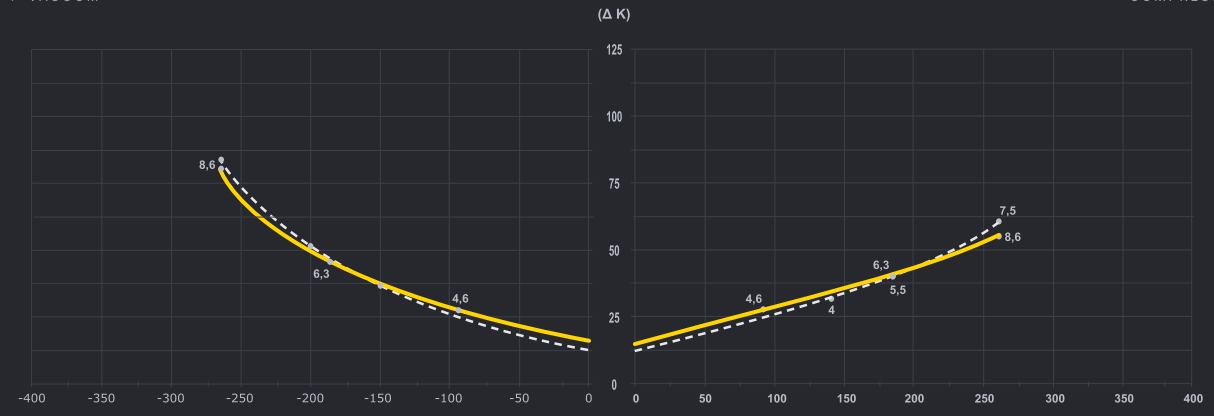


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

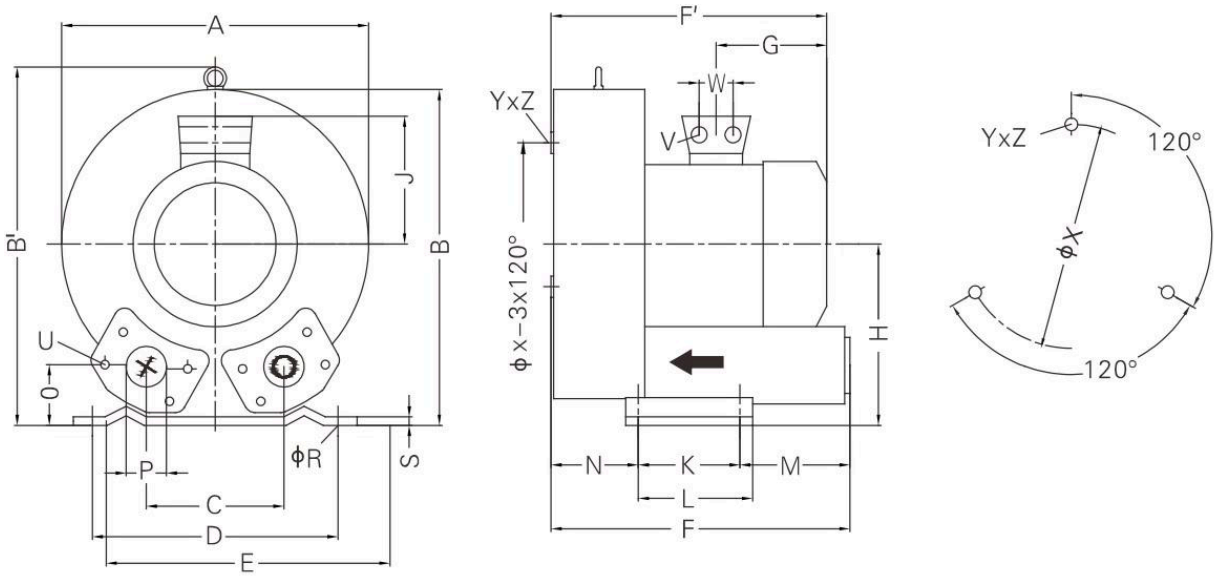

Type	A	B	B'	C	D	E	F	F'	G	H	J	K	L	M
STRC0700-1MT401-7	451	461	509	152	356	449	449	466	230	240	148	170	217	140
STRC0700-1MT551-7	451	461	509	152	356	449	449	492	247	240	148	170	217	140
STRC0700-1MT751-7	451	461	509	152	356	449	449	492	247	240	148	170	217	140

Type	N	O	P	ϕR	S	V	W	ϕX	Y_Z	X-Holes
STRC0700-1MT401-7	124	65	G 2 1/2"	15	6	4 x M32 × 1.5	42	286	M12 × 20	0/120°/240°
STRC0700-1MT551-7	124	65	G 2 1/2"	15	6	4 x M32 × 1.5	42	286	M12 × 20	0/120°/240°
STRC0700-1MT751-7	124	65	G 2 1/2"	15	6	4 x M32 × 1.5	42	286	M12 × 20	0/120°/240°

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved