
REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.

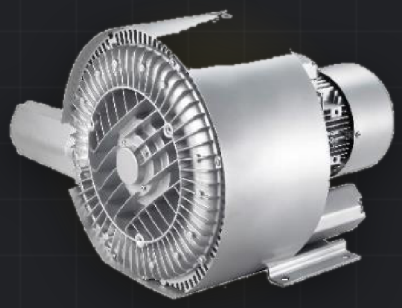

Vacuum or pressure · Continuous duty

1 250 m³/h	7.8 psi	−6.5 psi	14.5–29 kW	87 dB(A)	187–211 kg
736 CFM	0.54 bar	−0.45 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **2 stages, series**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC1050-2ST122-7	50	12.5	345-415 Δ / 600-720 Y	28.0 Δ / 16.2 Y	1 050 m³/h 618 CFM	−4.4 psi −0.30 bar	3.9 psi 0.27 bar	74	187
	60	14.5	380-480 Δ / 660-720 Y	29.0 Δ / 16.7 Y	1 250 m³/h 736 CFM	−3.2 psi −0.22 bar	2.9 psi 0.20 bar	87	
STRC1050-2ST165-7	50	16.5	345-415 Δ / 600-720 Y	35.0 Δ / 20.0 Y	1 050 m³/h 618 CFM	−6.1 psi −0.42 bar	5.4 psi 0.37 bar	74	197
	60	19	380-480 Δ / 660-720 Y	36.5 Δ / 21.0 Y	1 250 m³/h 736 CFM	−4.9 psi −0.34 bar	4.4 psi 0.30 bar	84	
STRC1050-2ST202-7	50	20	345-415 Δ / 600-720 Y	40.0 Δ / 23.0 Y	1 050 m³/h 618 CFM	−6.4 psi −0.44 bar	7.3 psi 0.50 bar	74	204
	60	23	380-480 Δ / 660-720 Y	42.0 Δ / 24.2 Y	1 250 m³/h 736 CFM	−6.4 psi −0.44 bar	6.2 psi 0.43 bar	84	
STRC1050-2ST252-7	50	25	345-415 Δ / 600-720 Y	52.0 Δ / 30.0 Y	1 050 m³/h 618 CFM	−6.5 psi −0.45 bar	8.6 psi 0.59 bar	74	211
	60	29	380-480 Δ / 660-720 Y	52.0 Δ / 30.0 Y	1 250 m³/h 736 CFM	−6.5 psi −0.45 bar	7.8 psi 0.54 bar	84	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

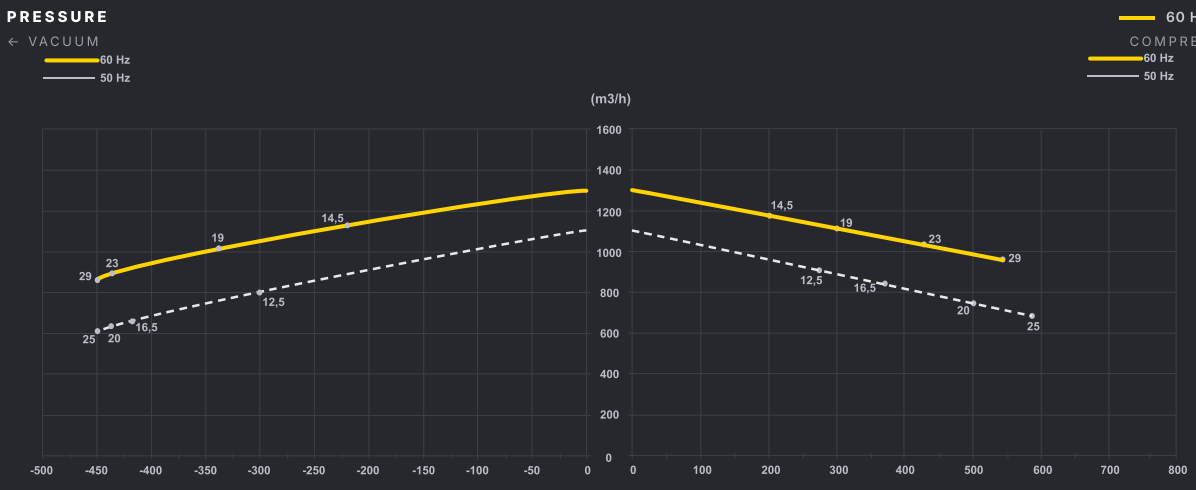

POWER VS PRESSURE

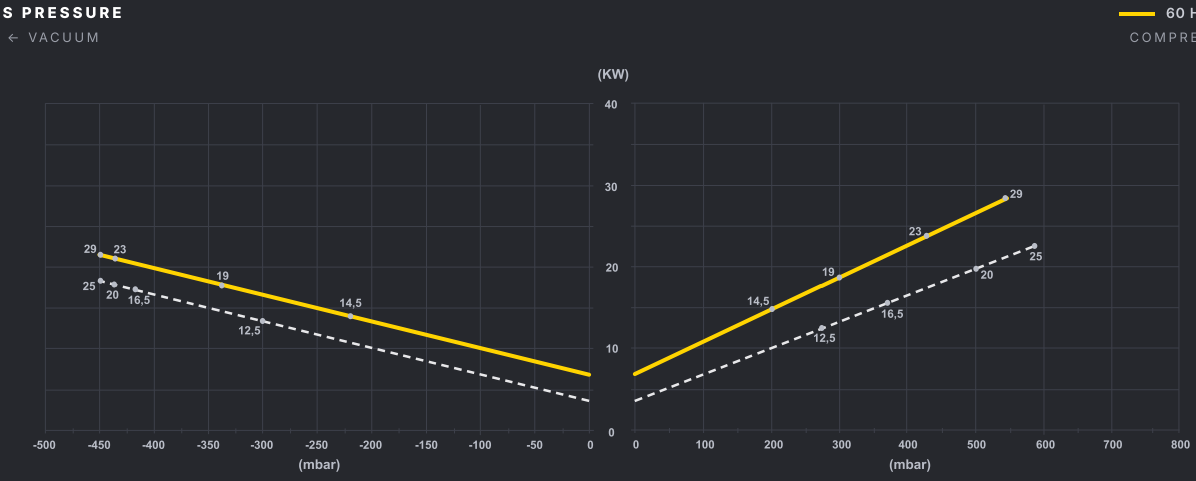

TEMPERATURE RISE VS PRESSURE

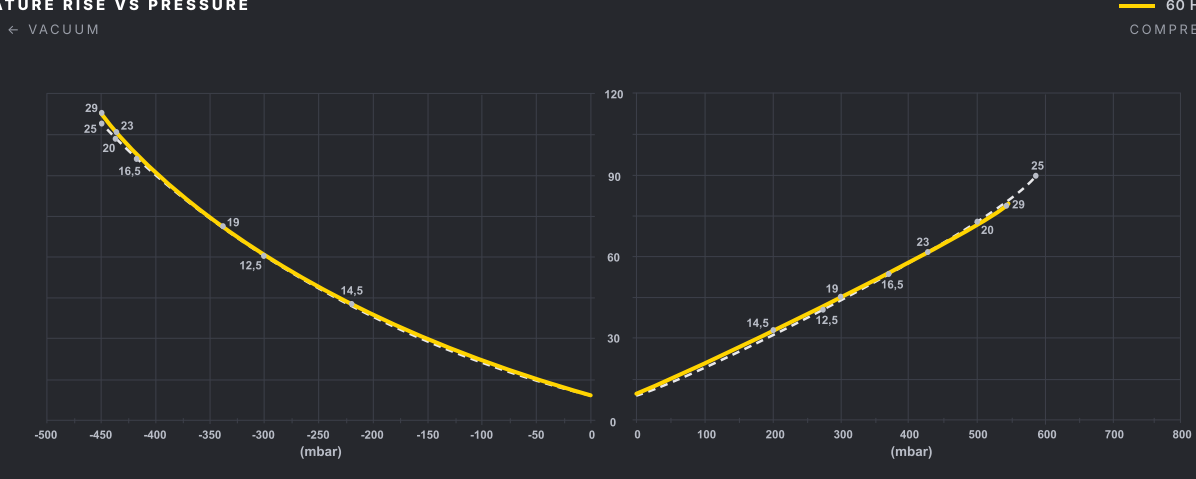


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

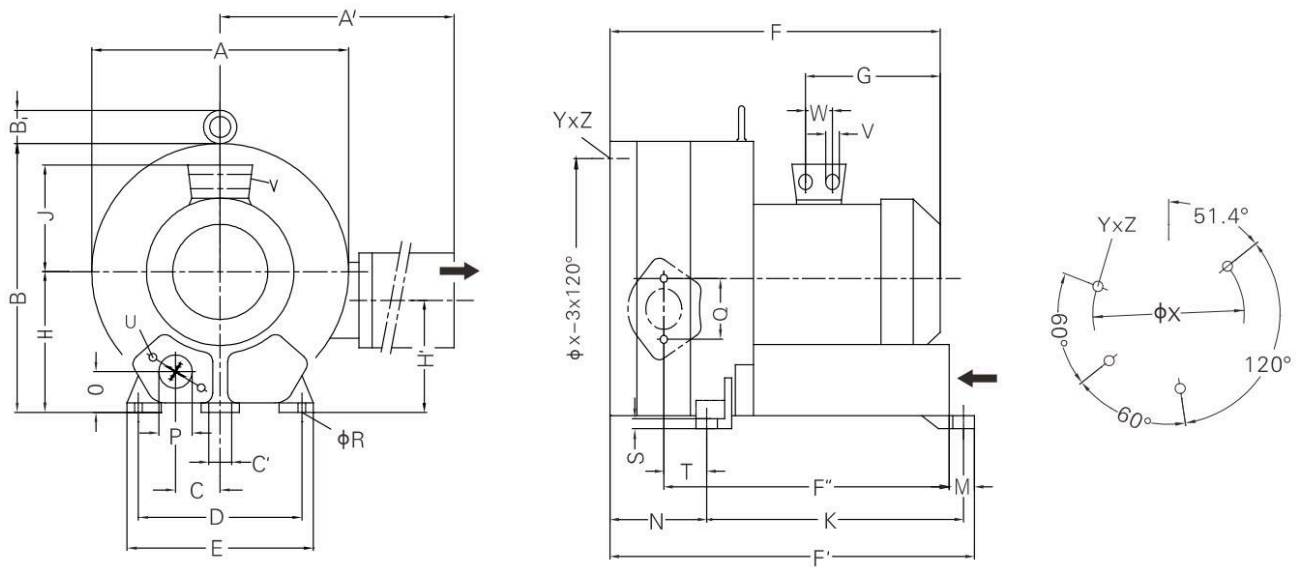

Type	A	A'	B	B'	C	C'	D	E	F	F'	F"	G	H	H'	J	K	M	N	O	ϕP	Q	ϕR	S	T	U	V	W	ϕX	Y_Z	X-Holes
STRC1050-2ST122-7	615	780	607	55	103.5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°
STRC1050-2ST165-7	615	780	607	55	103.5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°
STRC1050-2ST202-7	615	780	607	55	103.5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°
STRC1050-2ST252-7	615	780	607	55	103.5	15	360	415	812	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved