REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

1 650 m³/h	4.1 psi	−4.4 psi	9.8–21.3 kW	80 dB(A)	98–131 kg
971 CFM	0.28 bar	−0.30 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **Single stage**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC1370-1MT851-7	50	8.5	345-415 Δ / 600-720 Y	18.2 Δ / 10.5 Y	1 370 m³/h 806 CFM	−1.7 psi −0.12 bar	1.6 psi 0.11 bar	75	98
	60	9.8	380-480 Δ / 660-720 Y	18.2 Δ / 10.5 Y	1 650 m³/h 971 CFM	−1.2 psi −0.08 bar	1.1 psi 0.07 bar	80	
STRC1370-1MT122-7	50	12.5	345-415 Δ / 600-720 Y	28.0 Δ / 16.2 Y	1 370 m³/h 806 CFM	−3.0 psi −0.21 bar	2.8 psi 0.19 bar	75	121
	60	14.5	380-480 Δ / 660-720 Y	29.0 Δ / 16.7 Y	1 650 m³/h 971 CFM	−2.6 psi −0.18 bar	2.3 psi 0.16 bar	80	
STRC1370-1MT182-7	50	18.5	345-415 Δ / 600-720 Y	37.0 Δ / 21.0 Y	1 370 m³/h 806 CFM	−4.5 psi −0.31 bar	4.6 psi 0.32 bar	75	131
	60	21.3	380-480 Δ / 660-720 Y	39.0 Δ / 22.5 Y	1 650 m³/h 971 CFM	−4.4 psi −0.30 bar	4.1 psi 0.28 bar	80	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

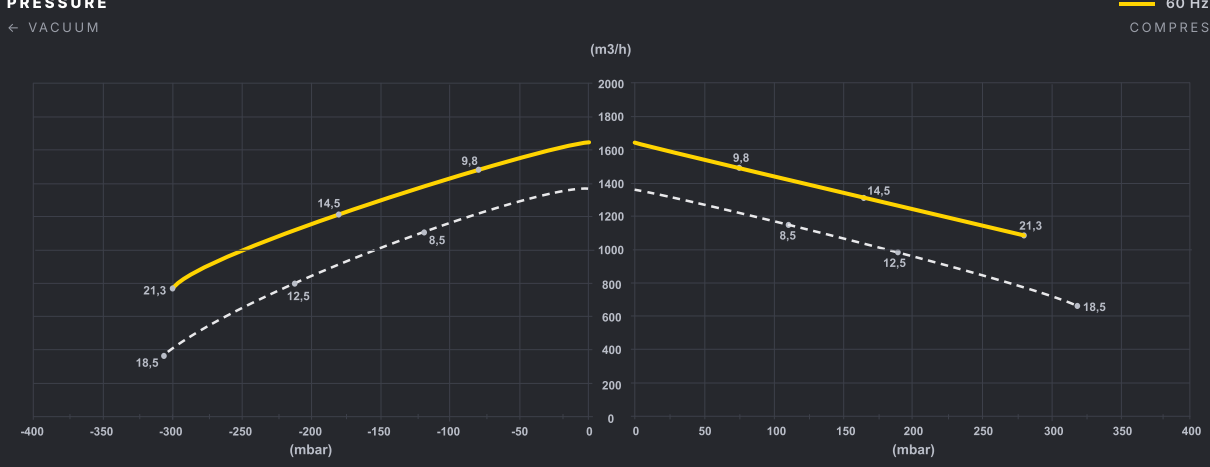

POWER VS PRESSURE

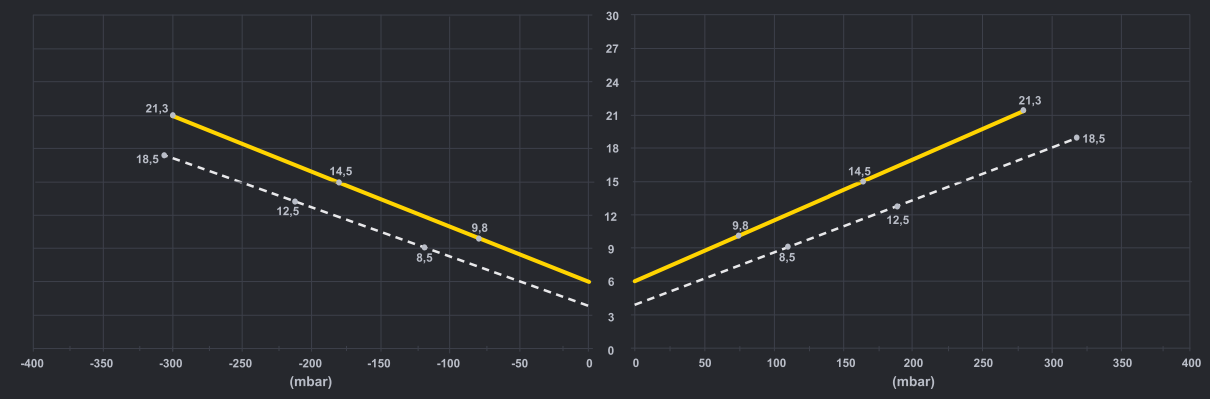

TEMPERATURE RISE VS PRESSURE

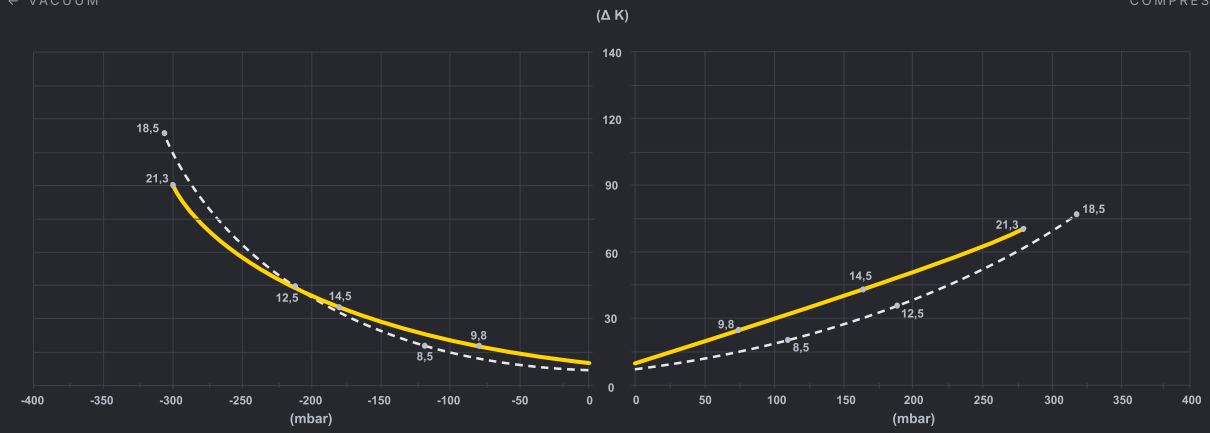


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

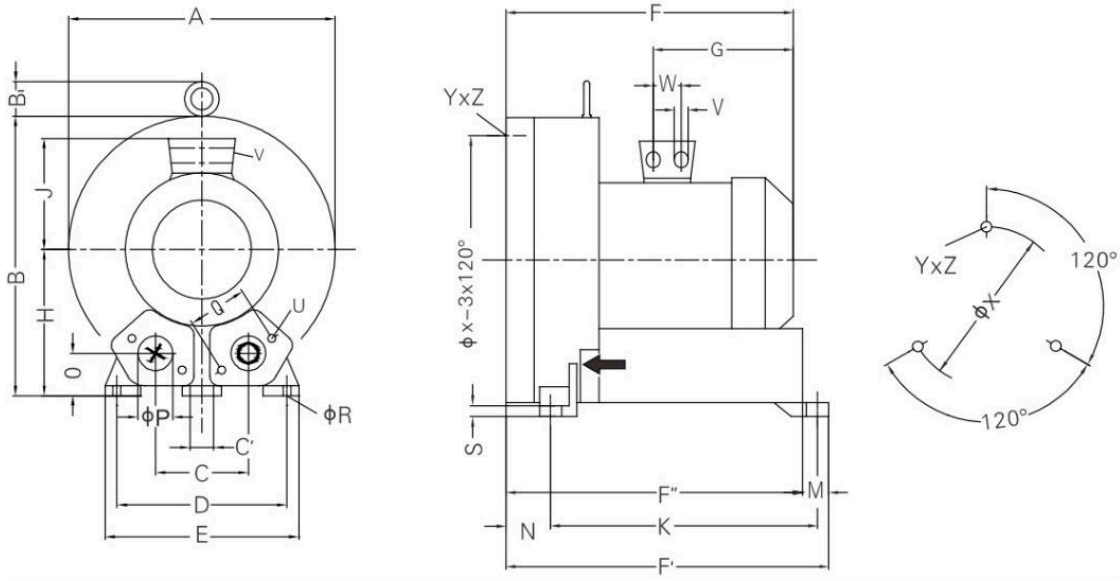

Type	A	B	B'	C	C'	D	E	F	F'	F''	G	H	J	K	M	N	O	P	Q	ϕR	S	U	V	W	ϕX	Y_Z	X-Holes
STRC1370-1MT851-7	550	569	55	207	15	360	415	563	682	643	268	300	167	533	39	127	92	G 4"	150	15	21	M12 × 30	4 x M32 × 1.5	42	490	M12 × 30	0/120°/240°
STRC1370-1MT122-7	550	569	55	207	15	360	415	649	682	643	345	300	167	533	39	127	92	G 4"	150	15	21	M12 × 30	4 x M32 × 1.5	54	490	M12 × 30	0/120°/240°
STRC1370-1MT182-7	550	569	55	207	15	360	415	649	682	643	345	300	167	533	39	127	92	G 4"	150	15	21	M12 × 30	4 x M32 × 1.5	54	490	M12 × 30	0/120°/240°

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved