REGENERATIVE BLOWER · 2 STAGES IN PARALLEL

Double-flow regenerative blower.

Two impellers in parallel for twice the flow. Oil-free, direct-driven.

Vacuum or pressure · Continuous duty



2 480 m³/h	3.3 psi	−3.9 psi	17.5–29 kW	84 dB(A)	220–235 kg
1 460 CFM	0.23 bar	−0.27 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **2 stages, parallel**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC2050-2PT152-7	50	15	345-415 Δ / 600-720 Y	35.0 Δ / 20.0 Y	2 050 m³/h 1 207 CFM	−2.3 psi −0.16 bar	2.5 psi 0.17 bar	75	220
	60	17.5	380-480 Δ / 660-720 Y	36.5 Δ / 21.0 Y	2 480 m³/h 1 460 CFM	−1.6 psi −0.11 bar	1.7 psi 0.12 bar	84	
STRC2050-2PT202-7	50	20	345-415 Δ / 600-720 Y	40.0 Δ / 23.0 Y	2 050 m³/h 1 207 CFM	−3.6 psi −0.25 bar	3.3 psi 0.23 bar	75	230
	60	23	380-480 Δ / 660-720 Y	42.0 Δ / 24.2 Y	2 480 m³/h 1 460 CFM	−2.8 psi −0.19 bar	2.6 psi 0.18 bar	84	
STRC2050-2PT252-7	50	25	345-415 Δ / 600-720 Y	52.0 Δ / 30.0 Y	2 050 m³/h 1 207 CFM	−4.5 psi −0.31 bar	3.9 psi 0.27 bar	75	235
	60	29	380-480 Δ / 660-720 Y	52.0 Δ / 30.0 Y	2 480 m³/h 1 460 CFM	−3.9 psi −0.27 bar	3.3 psi 0.23 bar	84	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

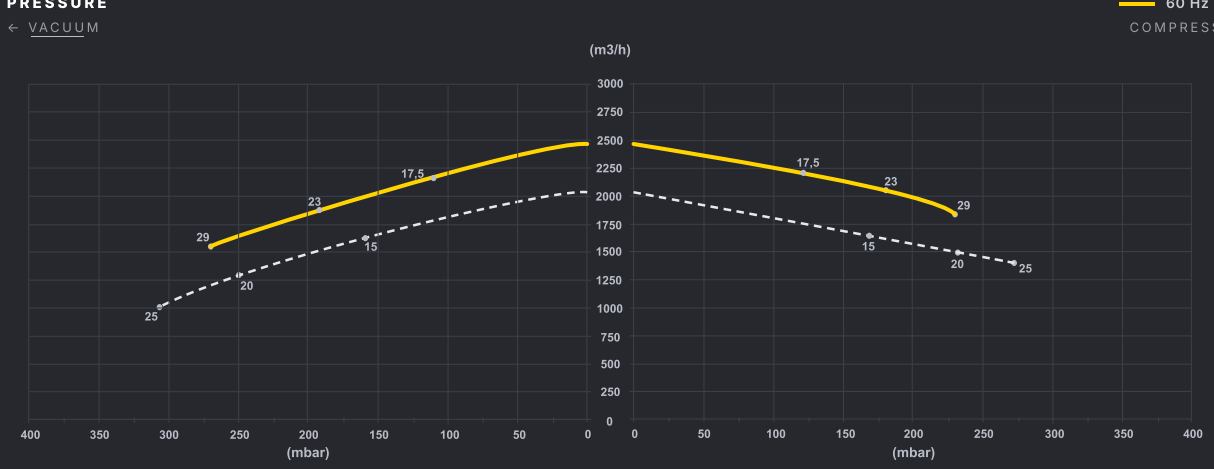

POWER VS PRESSURE

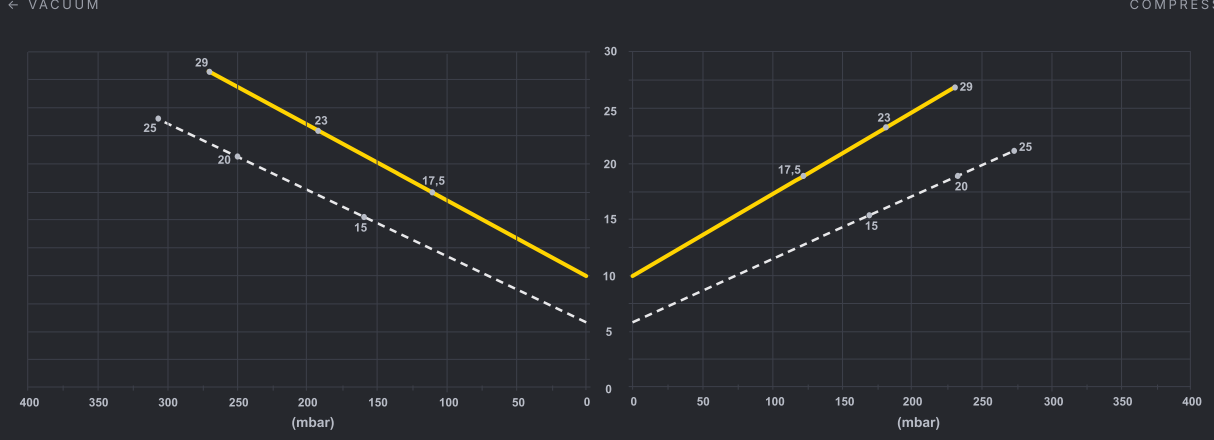

TEMPERATURE RISE VS PRESSURE

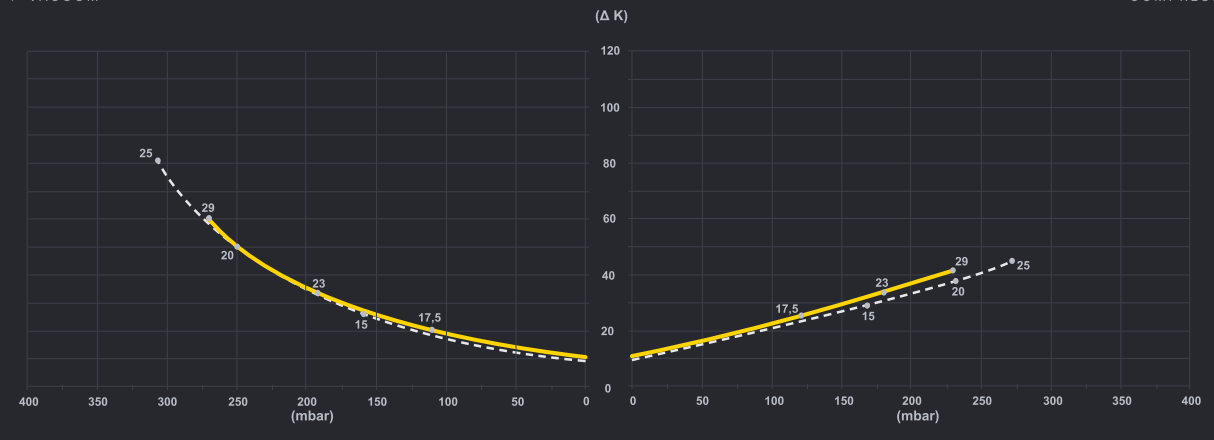


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

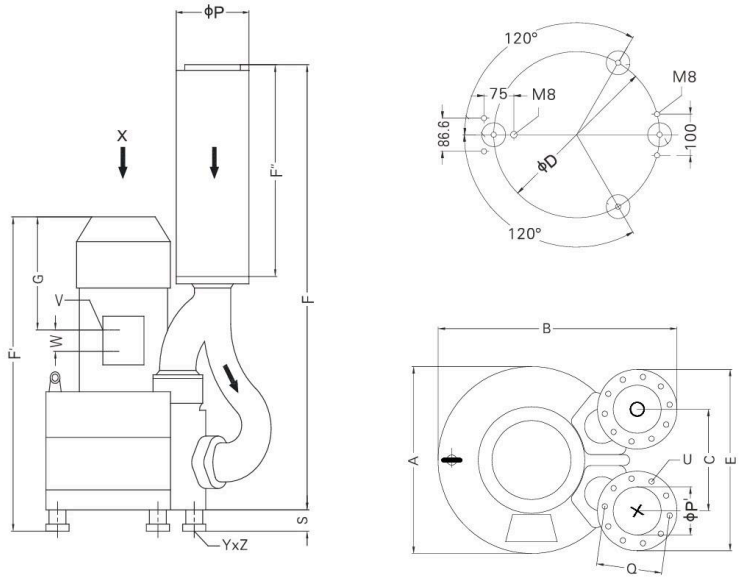

Type	A	B	C	D	E	F	F'	F''	G	P	P'	Q	S	U	V	W	Y_Z
STRC2050-2PT152-7	615	723	307	490	526	1201	848	578	291	219	135	201	58	M8 × 40	4 x M40 × 1.5	54	M12 × 10.5
STRC2050-2PT202-7	615	723	307	490	526	1201	848	578	291	219	135	201	58	M8 × 40	4 x M40 × 1.5	54	M12 × 10.5
STRC2050-2PT252-7	615	723	307	490	526	1201	908	578	351	219	135	201	58	M8 × 40	4 x M40 × 1.5	54	M12 × 10.5

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved