HIGH-PERFORMANCE BLOWER · 2 STAGES IN SERIES

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



60 m³/h	10.7 psi	−7.3 psi	0.94–1.75 kW	62 dB(A)	24–30 kg
35 CFM	0.74 bar	−0.50 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	COMPRESSION	USE	MOTOR
2 stages, series	Oil-free	Vacuum pump or compressor	50/60 Hz, class F, IP55
MOTOR PROTECTION	**VARIABLE SPEED**	**AMBIENT / INLET**	**MAX. ALTITUDE**
Thermal (bimetal), standard	Frequency converter allowed	−25 to 40 °C	1000 m

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0045-2ST810-6	50	0.81	200-240 Δ / 345-415 Y	Δ 4.0 / Y 2.3	47 m³/h 28 CFM	−5.4 psi −0.37 bar	7.1 psi 0.49 bar	58	24
	60	0.94	220-275 Δ / 380-480 Y	Δ 4.0 / Y 2.3	60 m³/h 35 CFM	−6.4 psi −0.44 bar	7.0 psi 0.48 bar	62	
STRP0045-2SA151-1	50	1.5	230	9.7	47 m³/h 28 CFM	−5.4 psi −0.37 bar	8.7 psi 0.60 bar	58	30
	60	1.75	230	10.3	60 m³/h 35 CFM	−6.1 psi −0.42 bar	9.6 psi 0.66 bar	62	
STRP0045-2ST151-6	50	1.5	200-240 Δ / 345-415 Y	Δ 7.5 / Y 4.3	47 m³/h 28 CFM	−5.4 psi −0.37 bar	9.4 psi 0.65 bar	58	28
	60	1.75	220-275 Δ / 380-480 Y	Δ 7.6 / Y 4.4	60 m³/h 35 CFM	−7.3 psi −0.50 bar	10.7 psi 0.74 bar	62	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

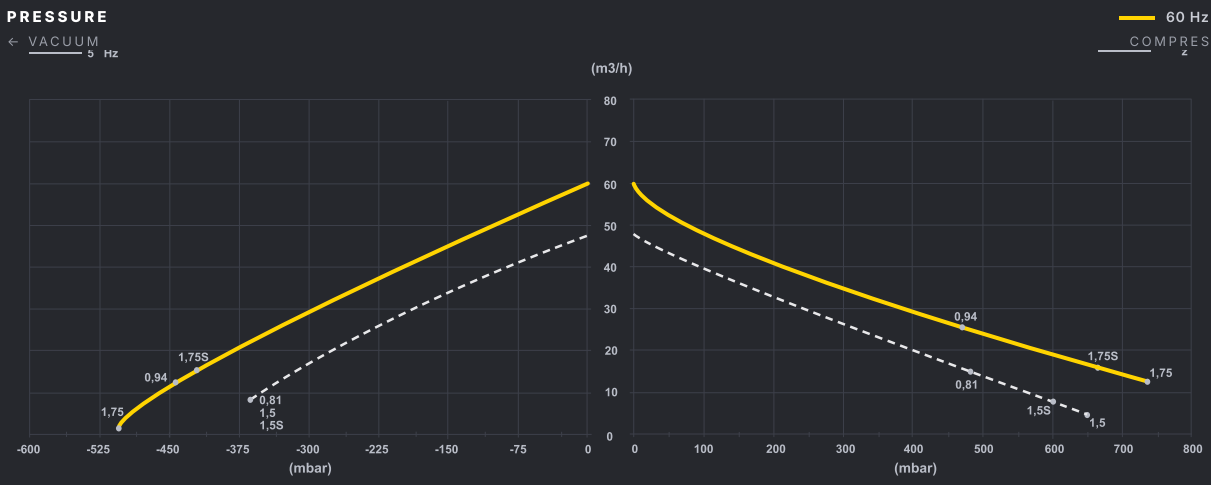

POWER VS PRESSURE

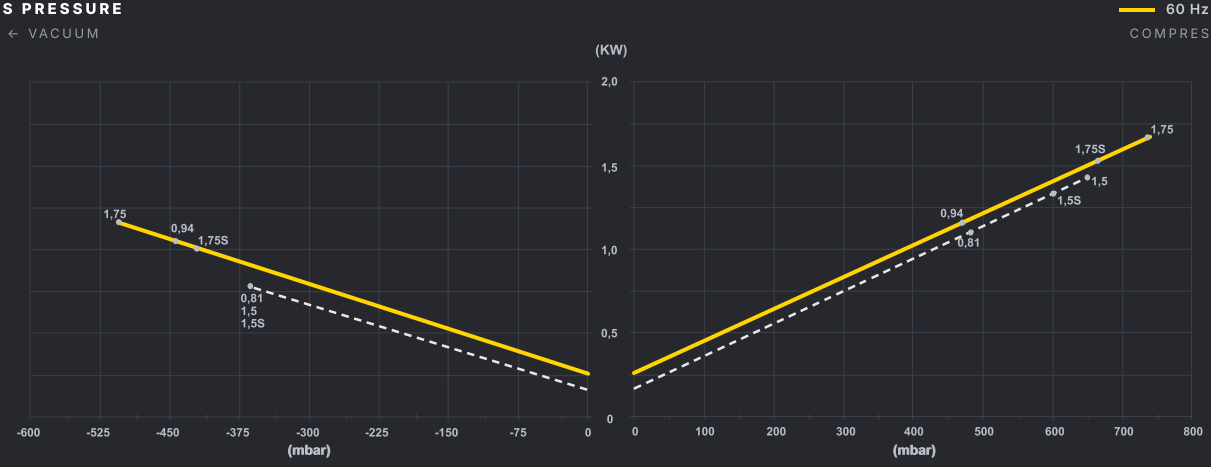

TEMPERATURE RISE VS PRESSURE

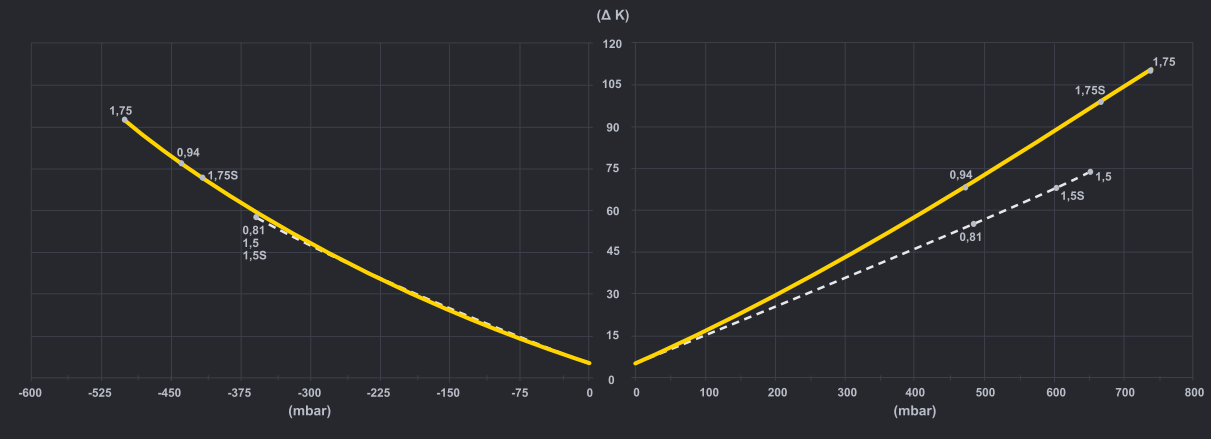



Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

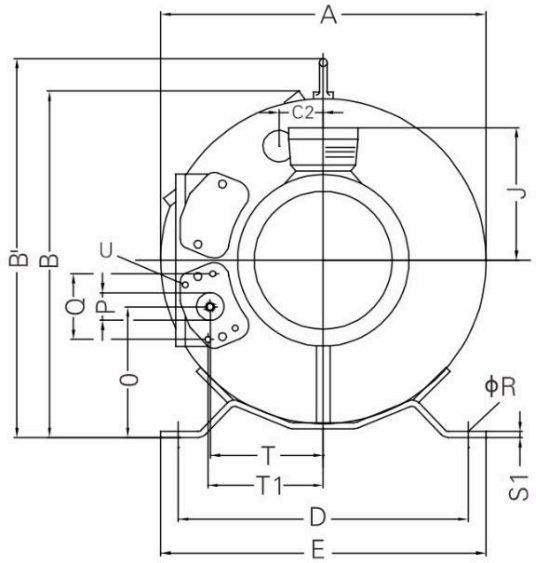

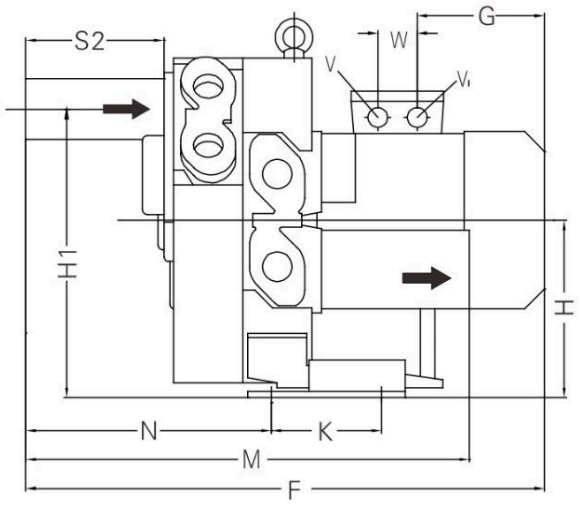

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0045-2ST810-6	313	326	359	43	260	298	469	130	167	272	111	105	426	241	123	G1 ¼"
STRP0045-2SA151-1	313	326	359	43	260	298	525	185	167	272	128	105	426	241	123	G1 ¼"
STRP0045-2ST151-6	313	326	359	43	260	298	525	185	167	272	128	105	426	241	123	G1 ¼"

Type	Q	ØR	S1	S2	S3	T	T1	U	V	V1	W
STRP0045-2ST810-6	64	14	4	140	31	105	107	M6 X 17	M16 X 1.5	M16 X 1.5	32
STRP0045-2SA151-1	64	14	4	140	31	105	107	M6 X 17	M25 X 1.5	M16 X 1.5	32
STRP0045-2ST151-6	64	14	4	140	31	105	107	M6 X 17	M25 X 1.5	M16 X 1.5	32

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved